



PART NUMBER
SEE TABLE IN SHEET 2

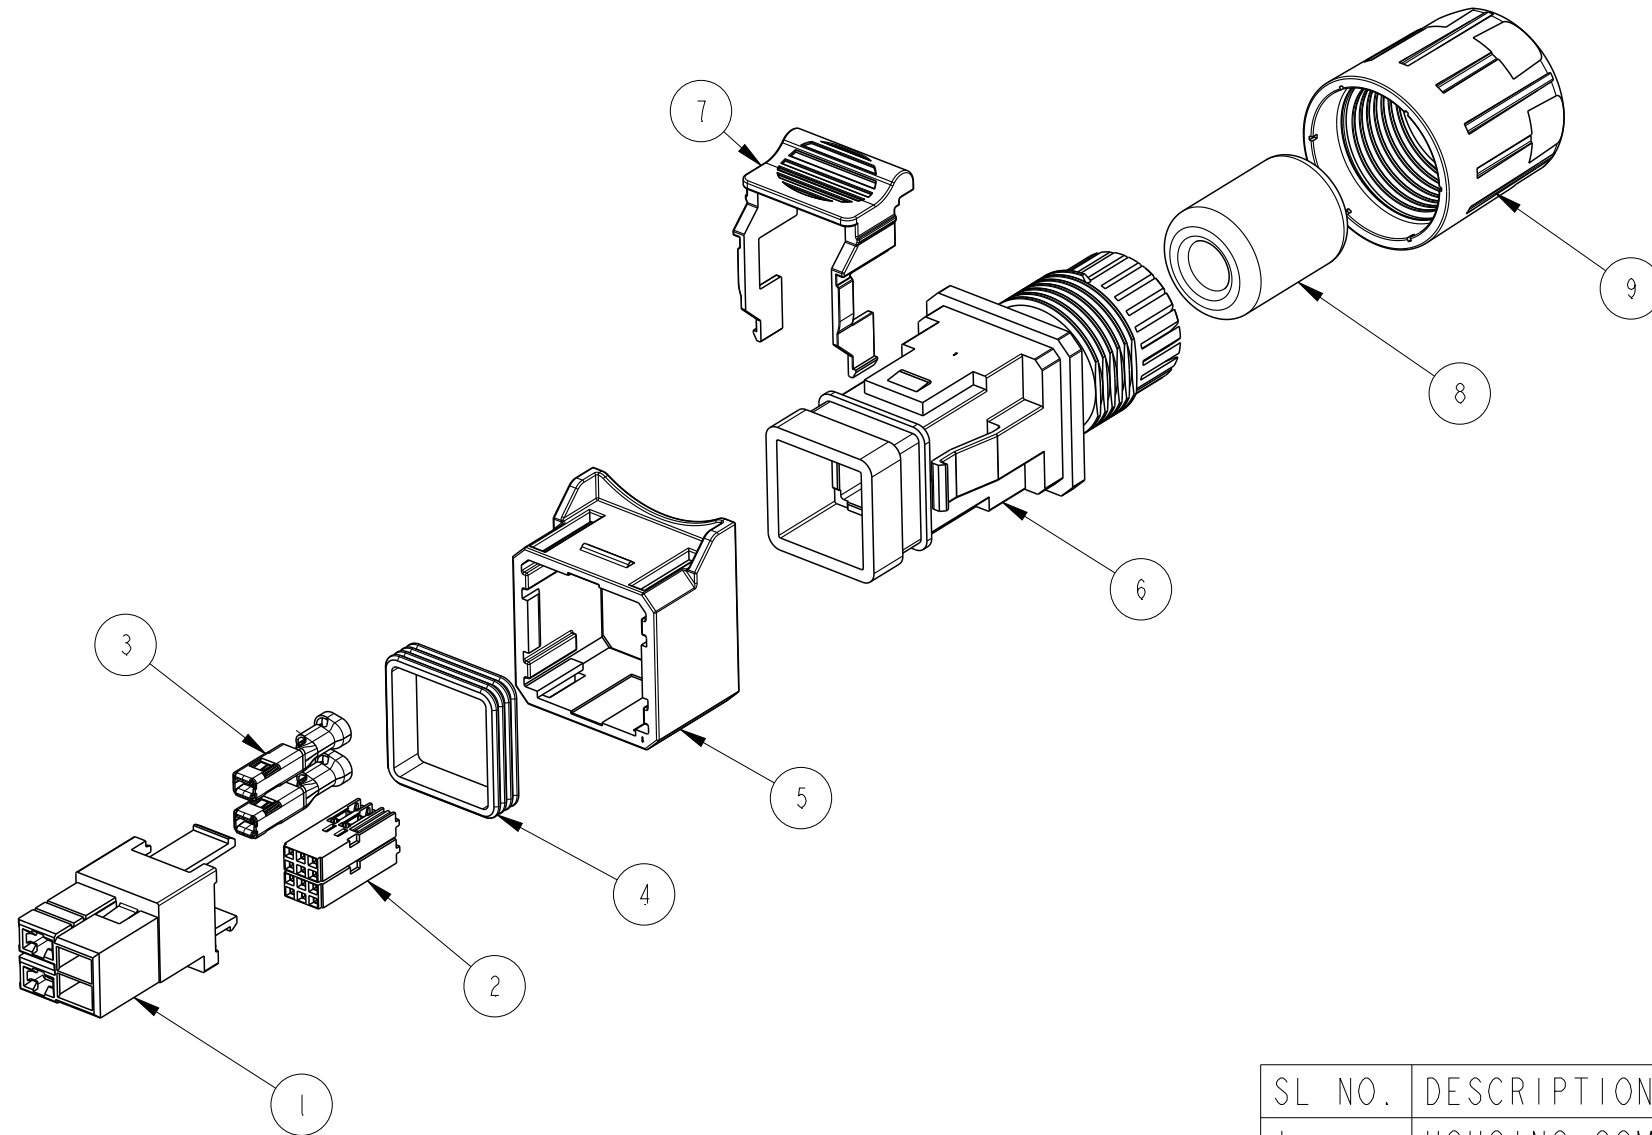


VERIO PLUG KIT ,HYBRID-8,10,12 POS SIGNAL+2 POS POWER, FIELD
TERMINABLE, PITCH 26 MM

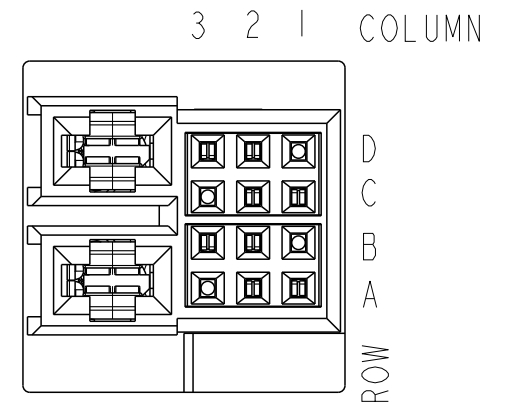


CONNECTOR FRONT VIEW



SL NO.	DESCRIPTION	MATERIAL	QTY	REMARKS
1	HOUSING-COMBO	PBT	1	
2	TERMINAL BLOCK ASSEMBLY	PBT+COPPER ALLOY	2	
3	FEMALE POWER CONTACTS	COPPER ALLOY	2	
4	SEAL	SILICON	1	
5	SLIDE	PBT GF	1	
6	HOLDER	PBT GF	1	
7	SECONDARY LOCK	PBT GF	1	
8	GLAND	SILICON	1	
9	NUT	PBT GF	1	



spec ref				dr		Jibin John	2017/09/26		projection				mm		size		A3	scale		3:10				
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		B T Varghese		2017/10/26				ecn no		ELX-I-28272-1								
ISO 406						chr		-		-														
ISO 1101						appr		K-Paul Biju		2017/10/26		product family				VERIO		rel level		Released				
surface  ISO 1302		linear		0.X		±0.3		Amphenol FCi		title		HYBRID-SIGNAL+PWR				dwg no		10143485				rev		B
				0.XX		±0.13																		
				0.XXX		±0.05																		
angular		0°		±2°				cat. no.		-		Product - Customer Drw				sheet 1 of 2								

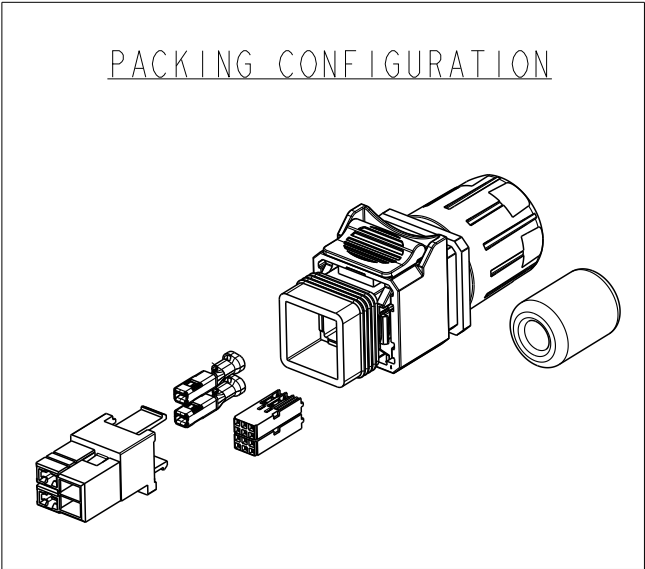


AFCI PART NO	ROW	COLUMN 3	COLUMN 2	COLUMN 1
10143485-101LF	D	x	x	-
	C	-	x	x
	B	x	x	-
	A	-	x	x
10143485-102LF	D	x	x	x
	C	-	x	x
	B	x	x	x
	A	-	x	x
10143485-103LF	D	x	x	x
	C	x	x	x
	B	x	x	x
	A	x	x	x



NOTES:

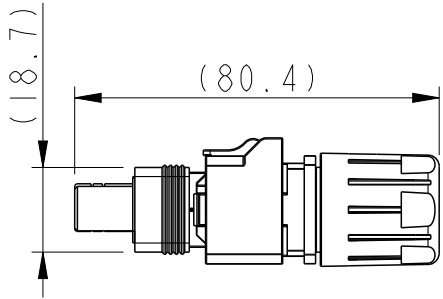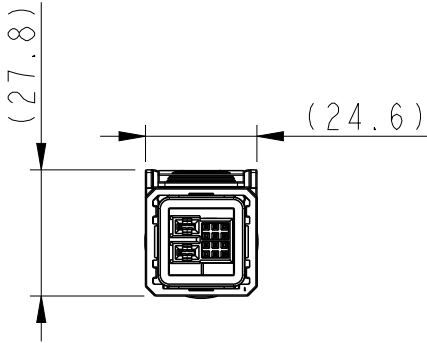- 1. ALL PARTS WILL BE SUPPLIED IN BULK PACKING
- 2. PRODUCT SPEC - GS-12-1427
- 3. APPLICATION SPEC - GS-20-0523



spec ref				dr		Jibin John	2017/09/26		projection		mm		size		A3	scale		3:10																	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		B T Varghese	2017/10/26						ecn no				ELX-I-28272-1																
ISO 406						chr		-		-																									
ISO 1101						appr		K-Paul Biju		2017/10/26					product family						VERIO						rel level				Released				
surface				linear		0.X		±0.3		Amphenol FCi		title		HYBRID-SIGNAL+PWR						dwg no		10143485						rev		B					
																																0.XX		±0.13	
																																0.XXX		±0.05	
ISO 1302		angular		0°		±2°				cat. no.		-		Product - Customer Drw						sheet 2 of 2															