

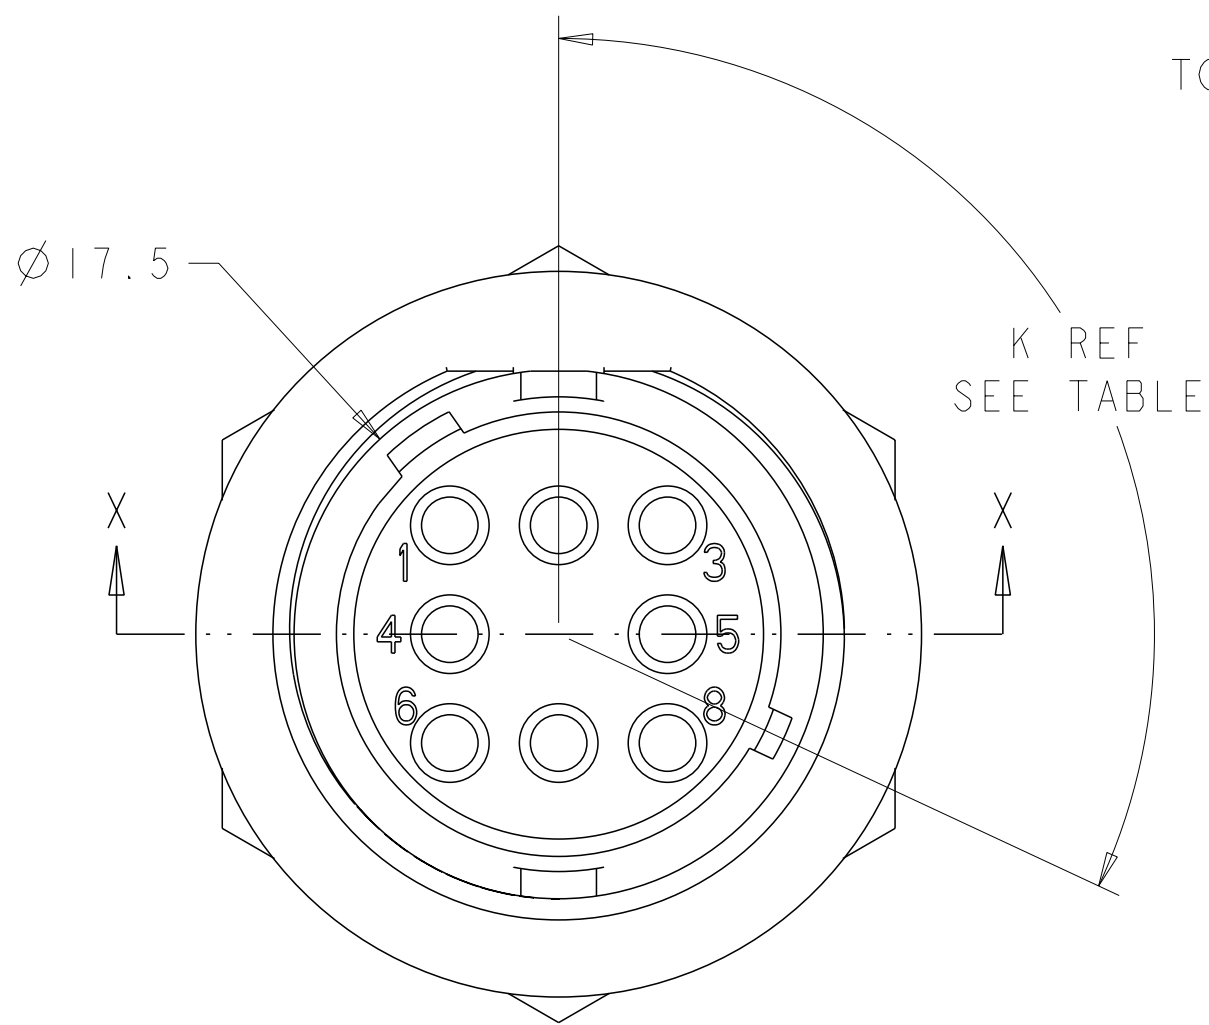
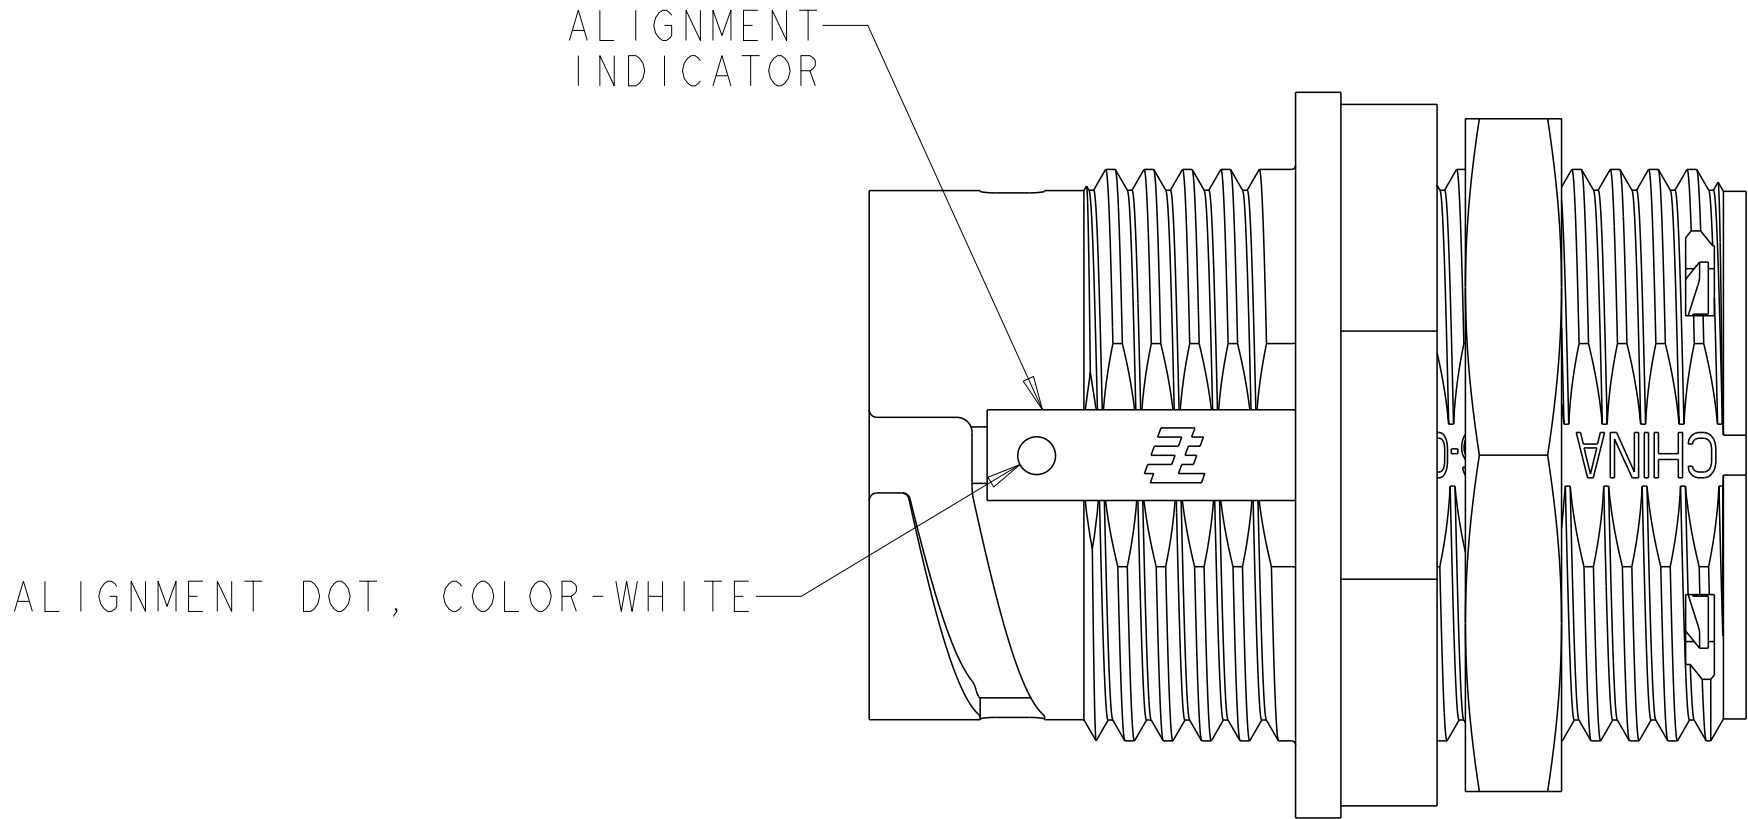


REVISIONS					
#	LYR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-15-010004	13JUL2015	NK	MZ
	C	REVISED PER ECO-17-004650	06APR2017	BDA	MZ

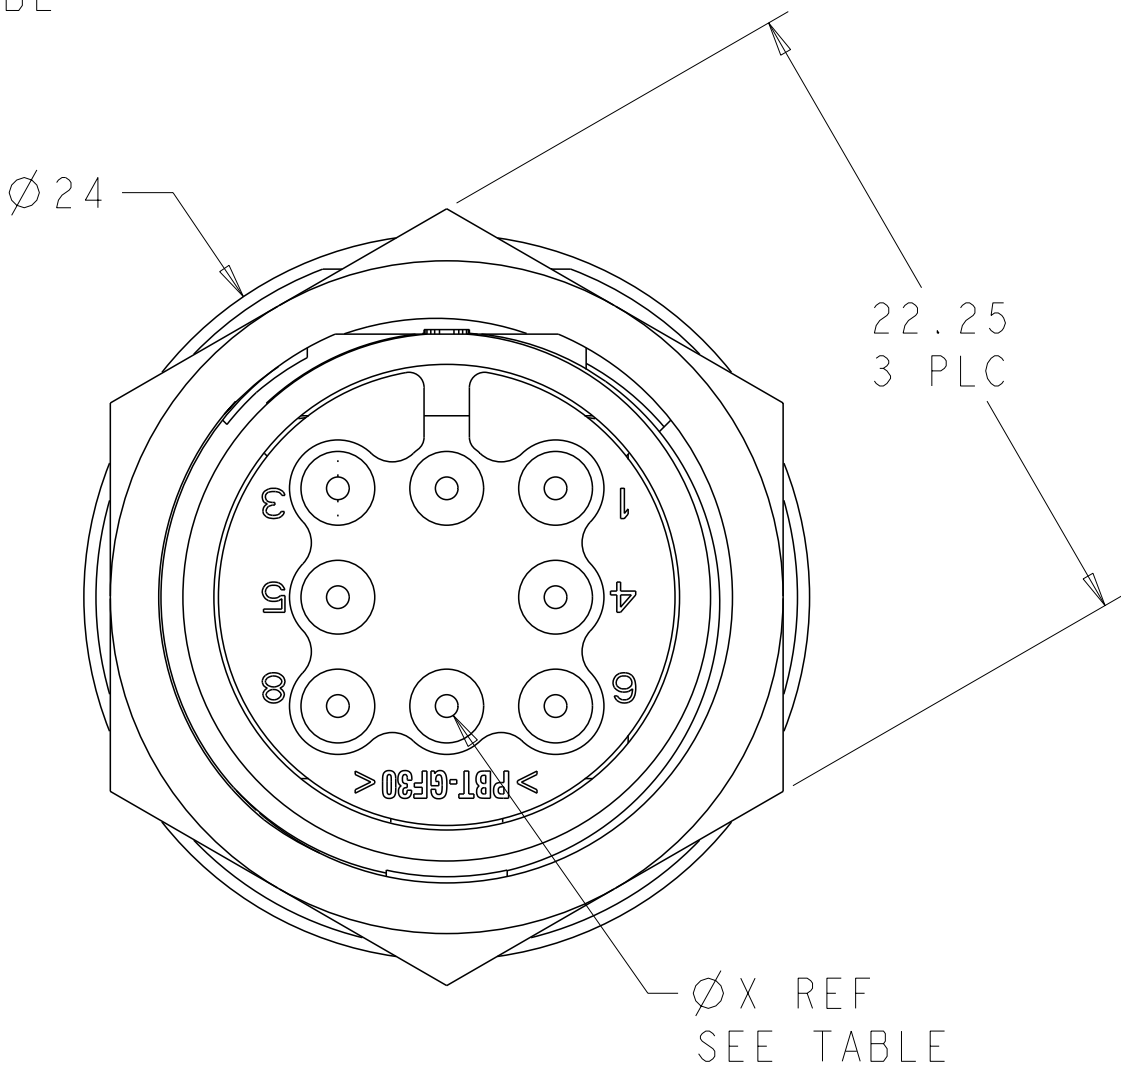


SEAL, PANEL, SHOWN FOR REFERENCE ONLY, TO BE ORDERED SEPARATELY, PART # 1445420-02

NUT, JAM; SHOWN FOR REFERENCE ONLY, TO BE ORDERED SEPARATELY, PART # 1445904-1

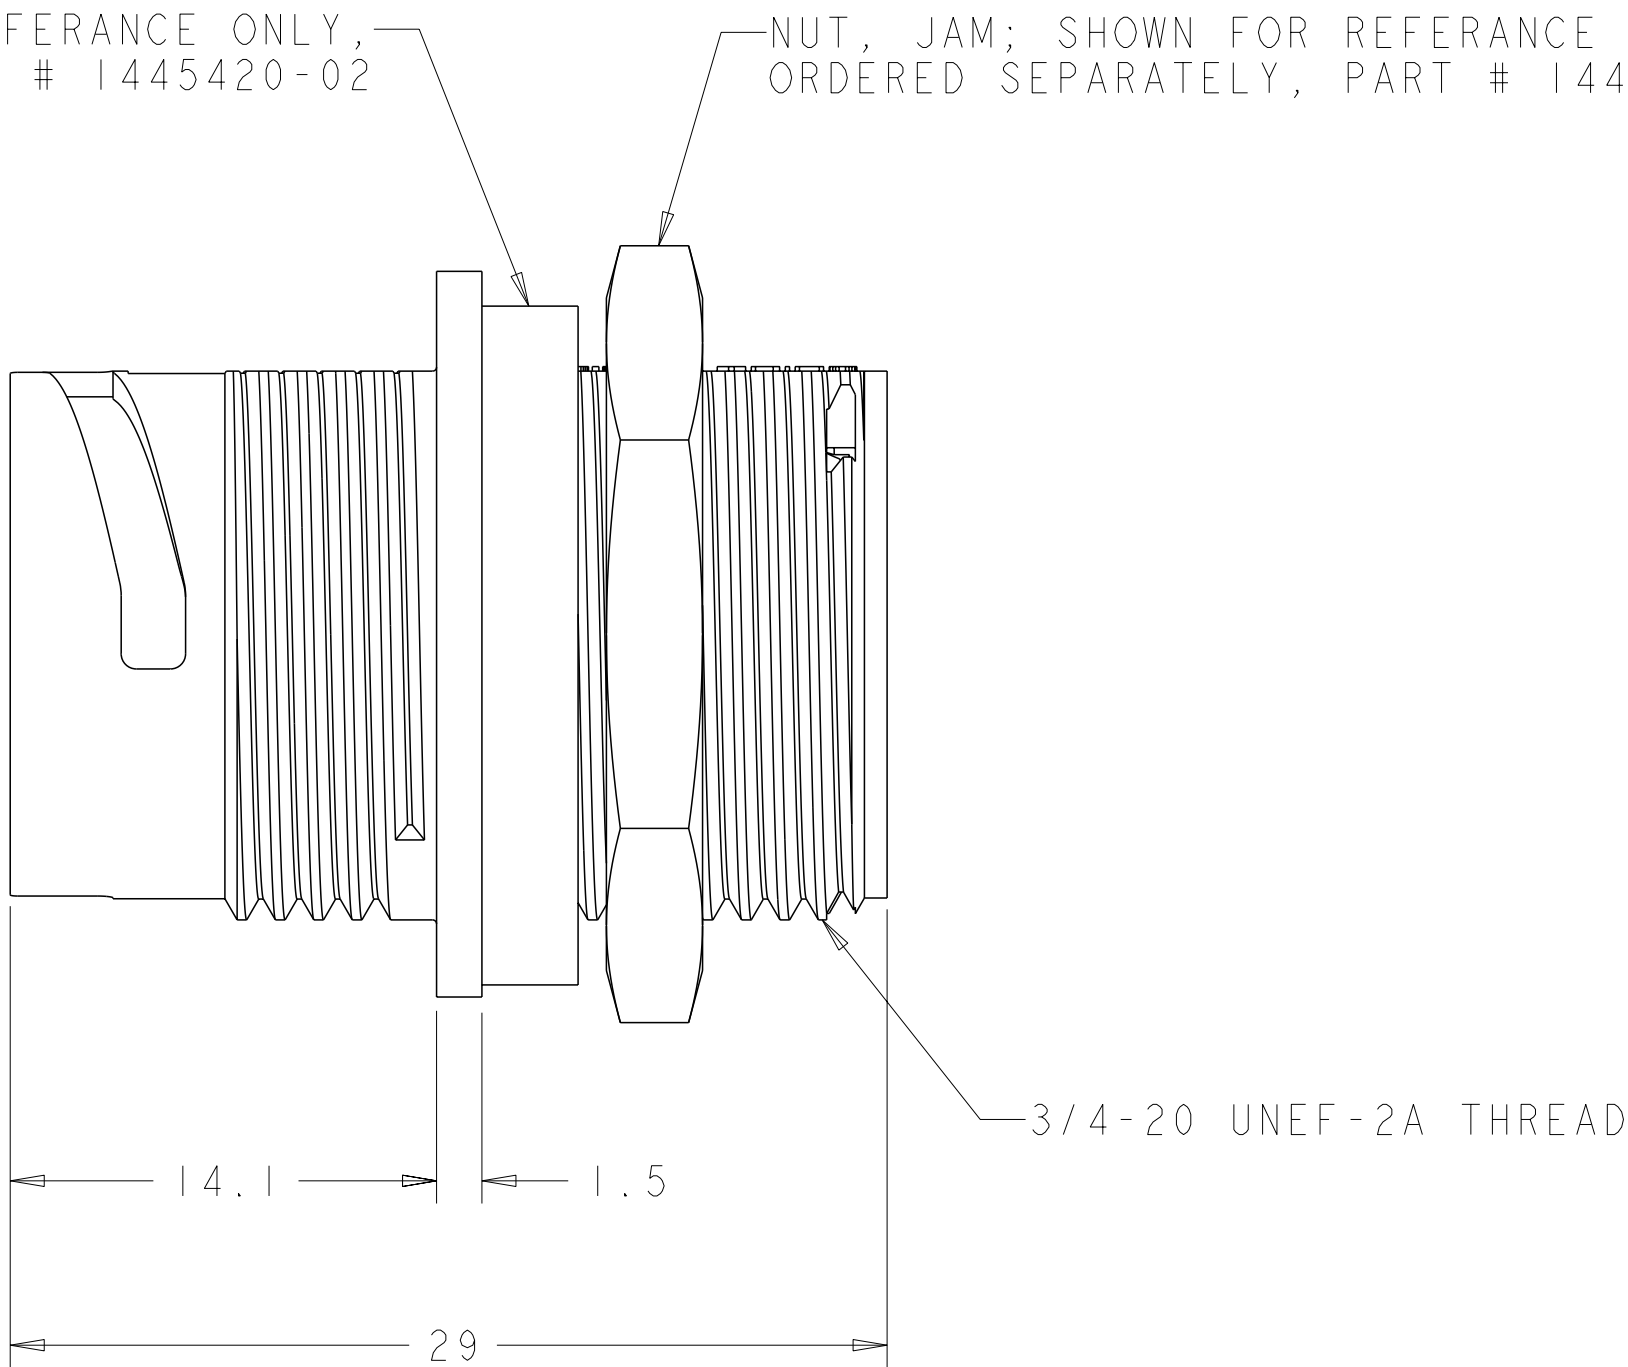


SEAL, PERIPHERAL, 1 REQD.
MATERIAL: ELASTOMER, COLOR-GRAY

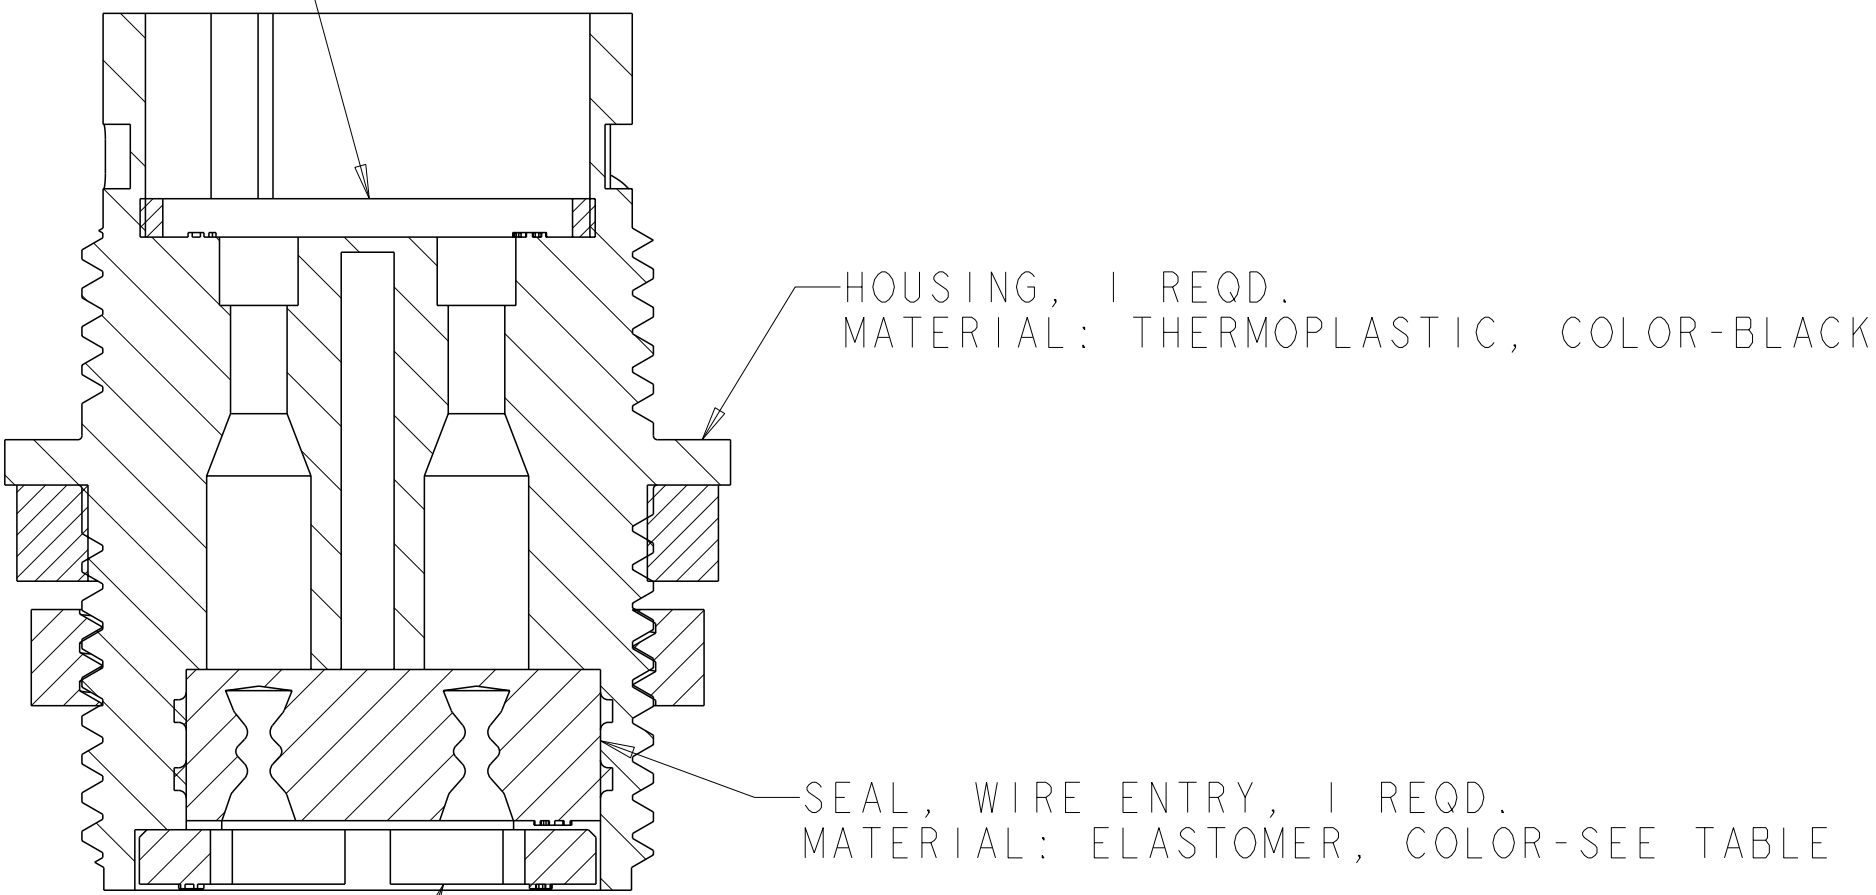

RETAINER, SEAL, 1 REQD.
MATERIAL: THERMOPLASTIC, COLOR-BLACK

SECTION X-X

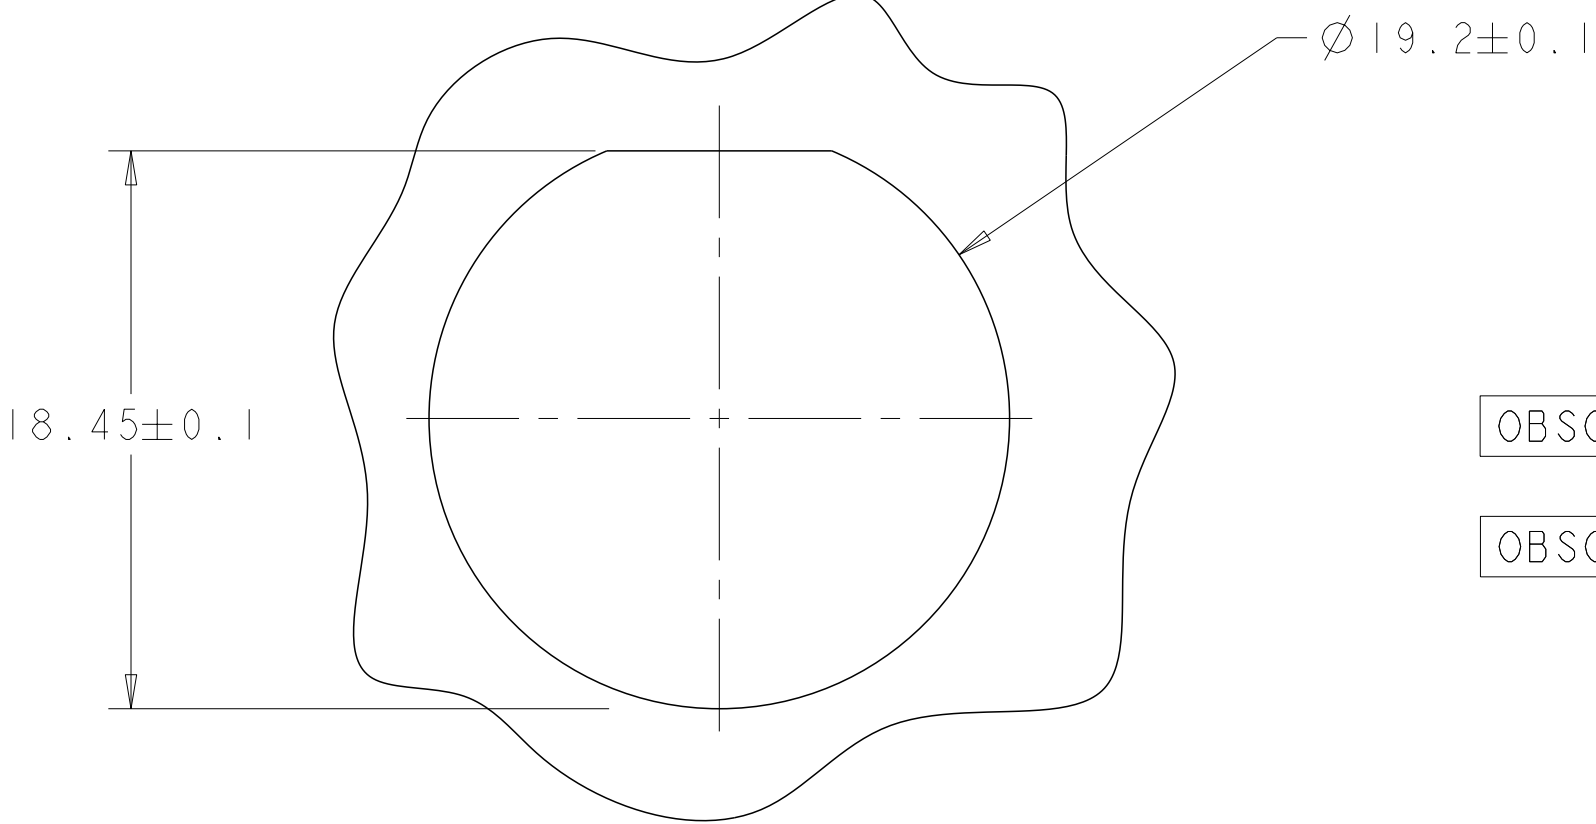

1. CONNECTOR CAN BE FRONT OR REAR PANEL MOUNTED.

2. MAX PANEL THICKNESS - 3.18

OBSOLETE	YELLOW	Ø0.75	135°	1445821-04
	NATURAL	Ø1.5	115°	1445821-03
OBSOLETE	NATURAL	Ø1.5	135°	1445821-02
	YELLOW	Ø0.75	115°	1445821-01
	SEAL, WIRE ENTRY COLOR	ØX REF	K REF	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHANE WIESE	12OCT2001	TE Connectivity	
		CHK G. DOUTY	12OCT2001		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±		APVD H. WAKEEM	
		1 PLC ±0.13		PRODUCT SPEC	
		2 PLC ±		APPLICATION SPEC	
		3 PLC ±		SIZE	
		4 PLC ±		CAGE CODE	
		ANGLES FINISH		DRAWING NO	
MATERIAL		SEE CALLOUT		WEIGHT	
SEE CALLOUT		SEE CALLOUT		CUSTOMER DRAWING	
				SCALE	
				4:1	
				SHEET	
				1 OF 1	
				REV	
				C	