


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE	1/27/14

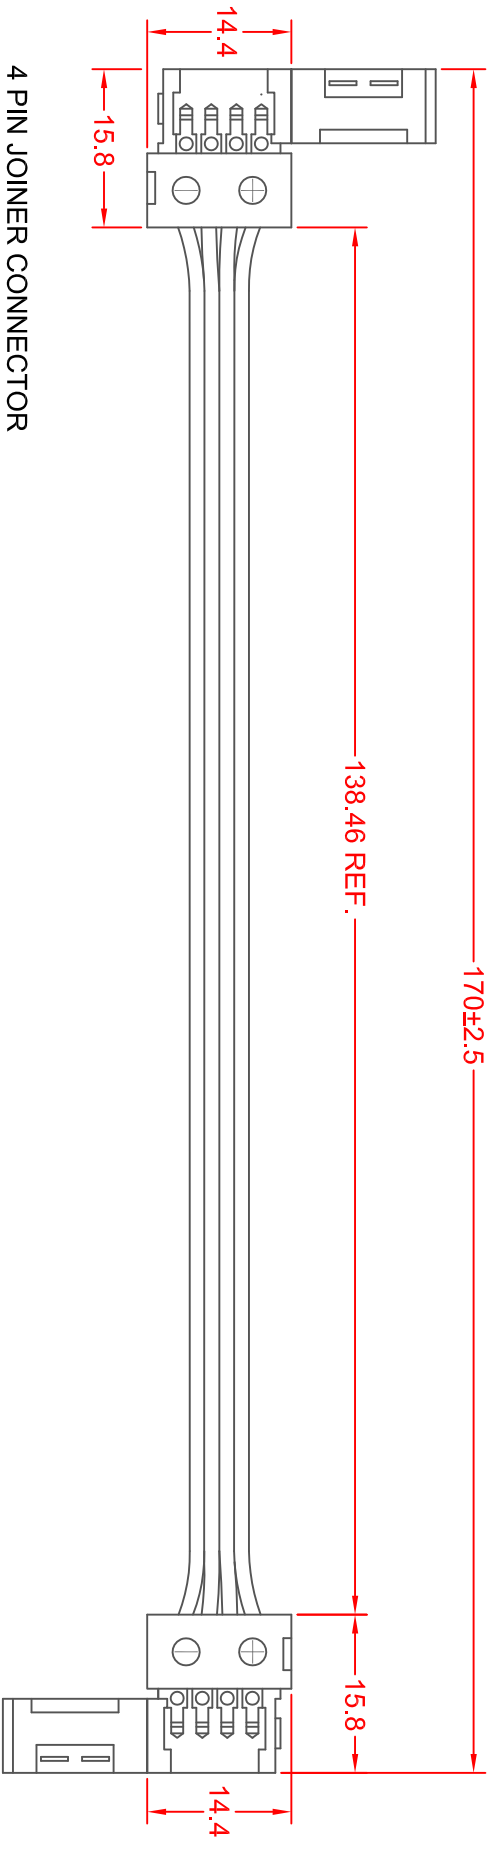

4 PIN JOINER CONNECTOR
 WIRE TYPE: UL1007, 22 AWG

NOTES:

1. OPERATION
1. GENTLY LIFT LATCH AT SIDE OF CONNECTOR.
2. SWING COVER OFF OF CONTACTS.
3. SLIDE THE FLEX TAPE INTO THE CONNECTOR PLACING THE EDGE OF THE FLEX TAPE UNDER THE CONNECTOR COVER.
4. FOLD OVER THE COVER AND PRESS IN PLACE UNTIL THE LATCH IS FULLY ENGAGED.
2. LIMIT CURRENT TO A MAXIMUM OF 5 AMPS.

JKL PART NO.: ZCH-170-RGB-J

USED WITH JKL RGB LED FLEX LIGHT RIBBON
 PART NO.: ZFS-10504-RGB

		METRIC DIMENSIONS ARE IN mm (INCHES)		JKL COMPONENTS CORPORATION	
TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- 0		TITLE RGB FLEX RIBBON JOINER CONNECTOR HARNESS		FSCM NO. 55335 DRAWING NO. ZCH-170-RGB-J	
DRAWN BY L. WENGSTROM APP'VD BY L.R. DATE 1/27/14	SIZE A SCALE NONE	RELEASED DATE 1/27/14	REVISION DATE	REV. NO.	SHEET 1 OF 1
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED					