




TOP VIEW

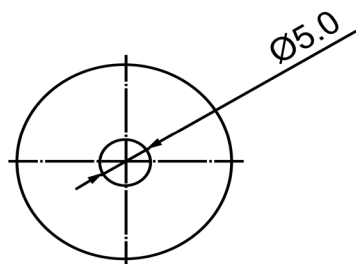

SIDE VIEW

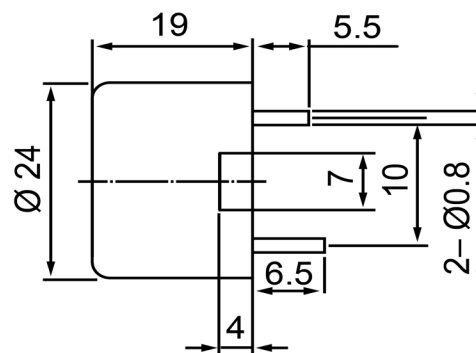

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description			Date	Approved		
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering			10/21/2013	J.S		
Resonant Frequency	3,450	(Hz)									
Rated Voltage	8	(V)									
SPL @ 10cm	90	(dBA)									
Capacitance	20,000	(pF)									
Mount Type	Thru Hole										
Voltage Range	2 ~ 30	(V)									
Max Rated Current	5	(mA)									
Housing Material	ABS777										
Operating Temperature	-20 ~ +60	°C									
Storage Temperature	-30 ~ +70	°C									
Weight	5	(g)									
			 DB UNLIMITED	Drawn by			Date	Checked by	Date	Approved by	Date
				A.B.			10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Piezo Transducer			TP243408-1					