


PCB LAYOUT

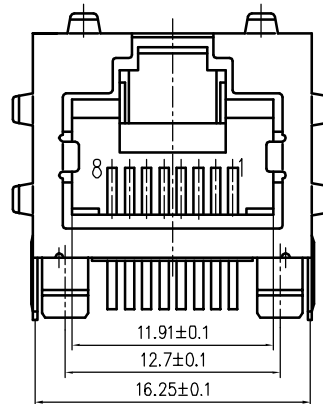

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR MATERIAL: PBT
COLOUR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
SHIELDING: BRONZE NI PLATED
QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL

OPERATING TEMPERATURE: -25 °C UP TO 85 °C
FLAMMABILITY RATING UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL



CURRENT RATING: 1.5 A
WORKING VOLTAGE: 125 VAC
INSULATION RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
CONTACT RESISTANCE: 20 MOHM MAX

SOLDERING

WAVE PROCESS ONLY

PACKAGING

TRAY

				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = \pm 0.2</div> <div>.XX = \pm 0.15</div>	<div></div>			D
G									
F									
E									
D									
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: RJ45 SHIELDED TAP UP			SIZE A4
B					SCALE:				
A	03-FEB-07	PDF	CH		SHEET: 1/1	WERI PART NO: 615008140621			
REV	DATE	FILE	BY		DRAW:				