


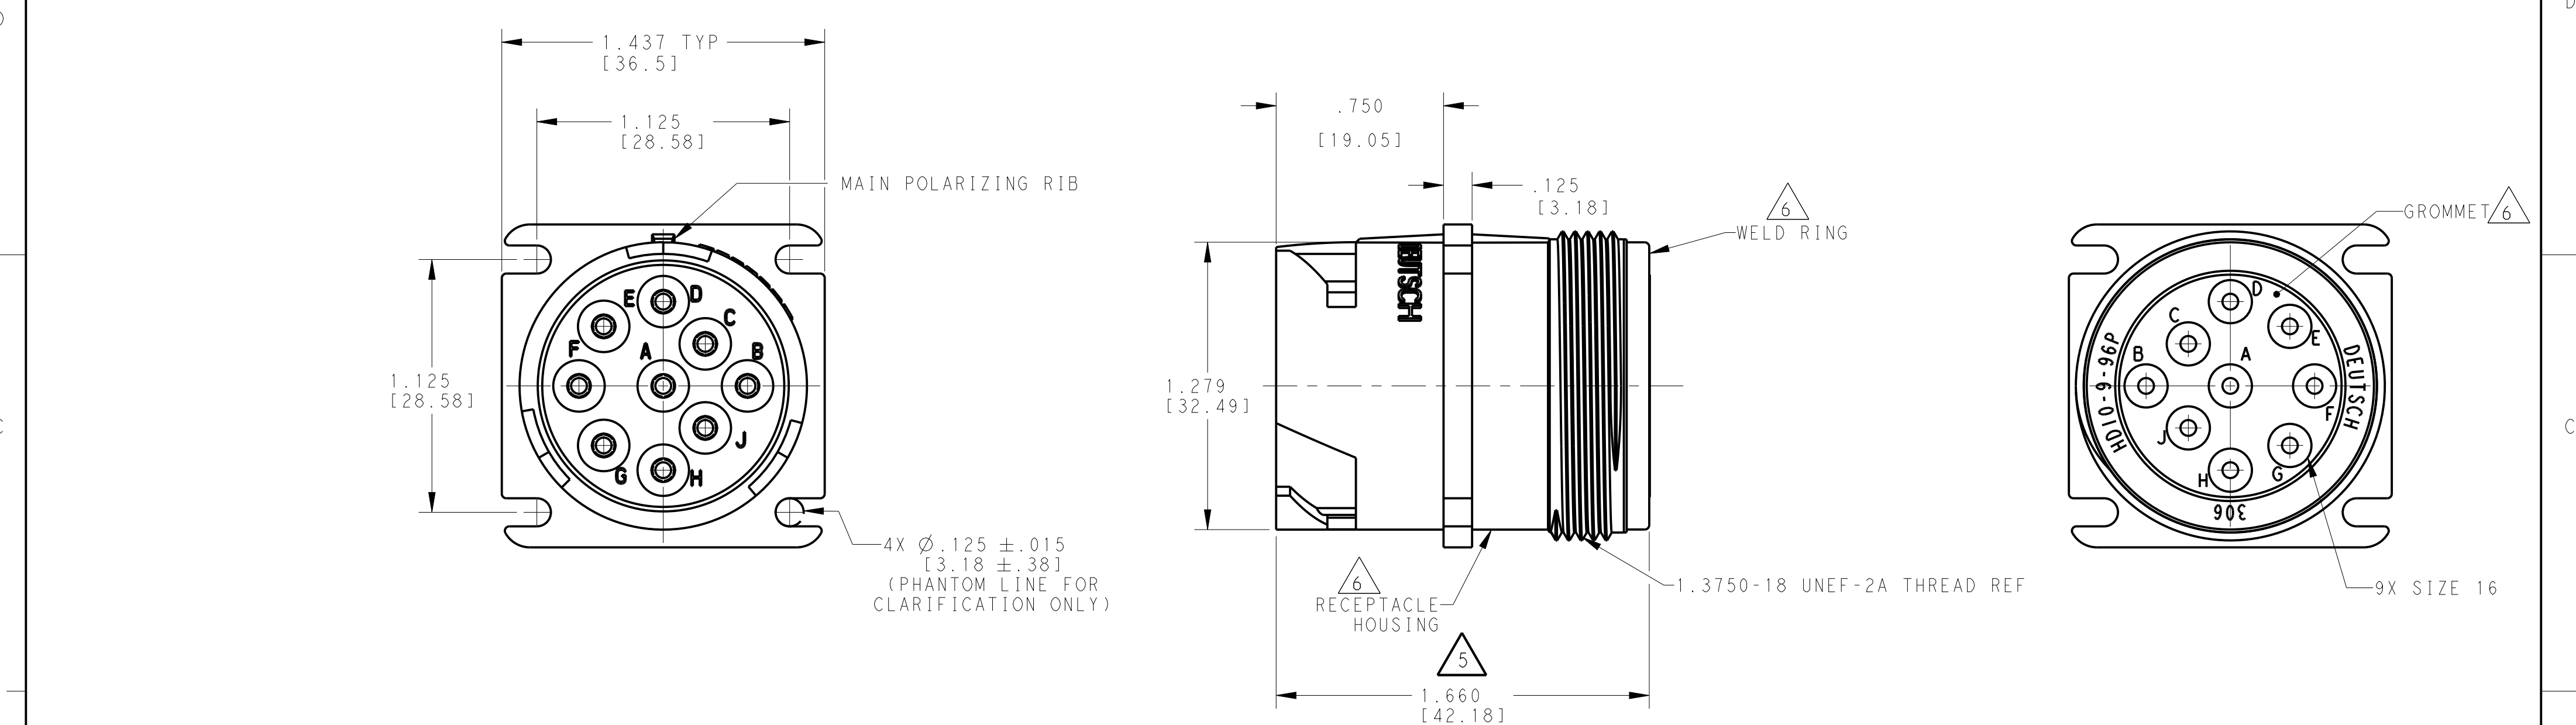

- 6 MATERIAL: RECEPTACLE HOUSING AND WELD RING: PA 15%GF (GREY)
GROMMET: SILICONE (RED)


5 OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.

4 THIS RECEPTACLE MATES WITH FOLLOWING PLUG (X= SEAL TYPE, XXXX= ALL MODIFICATIONS).
HD16-9-96SX-XXXX

3 SEE DRAWING 0425-015-0000 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS.

2 MAXIMUM PANEL THICKNESS IS .250 [6.25].

1 SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGE.
- | CONTACT SIZE | MINIMUM O.D. | MAXIMUM O.D. | WIRE RANGE [mm ²] |
|--------------|--------------|--------------|-------------------------------|
| 16 | .100 [2.54] | .150 [3.81] | 14-20 AWG [2.0-.50] |
- NOTES:

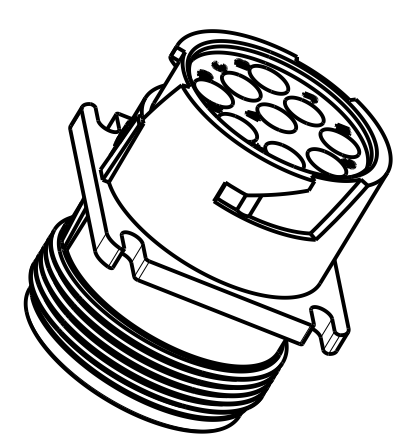

3-D VIEW

