22mm Non-Illuminated Metal Operators

E225660

Certified for **NEMA Type 4X** 12 environment.

Flush
Momentary
with mounting bracket

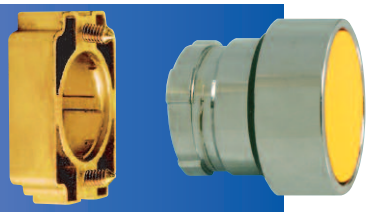

	Color	Cat No.
☐	White	2AF1
■	Black	2AF2
■	Green	2AF3
■	Red	2AF4
■	Blue	2AF6
■	Yellow	2AF8

Booted
Momentary
with mounting bracket

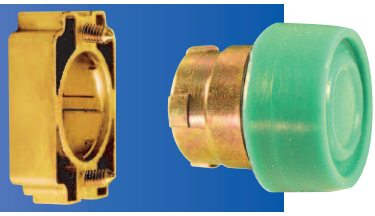

	Color	Cat No.
☐	White	2AB1
■	Black	2AB2
■	Green	2AB3
■	Red	2AB4
■	Blue	2AB6
■	Yellow	2AB8

Projecting
Momentary
with mounting bracket

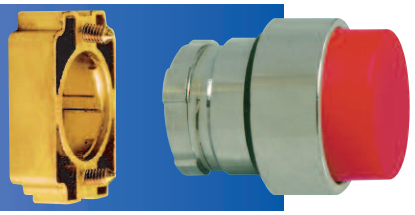

	Color	Cat No.
☐	White	2AP1
■	Black	2AP2
■	Green	2AP3
■	Red	2AP4
■	Blue	2AP6
■	Yellow	2AP8

Recessed
Momentary
with mounting bracket

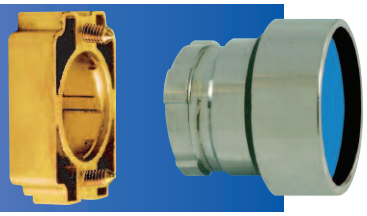

	Color	Cat No.
☐	White	2AF1RH
■	Black	2AF2RH
■	Green	2AF3RH
■	Red	2AF4RH
■	Blue	2AF6RH
■	Yellow	2AF8RH

All above operators available with remote attachment. Standard length is 50mm (2 in.), other lengths available upon request. Contact Altech for Part Number.

Markings on Request



Altech Push Buttons are available in a variety of markings, including molded arrows. Please contact Altech for further information and part numbers.

Switch Contacts
(sold separately)



- Heavy-duty contact blocks with mounting screws. Blocks can be stacked 2 blocks across by 3 blocks deep for a total of 6 circuits.
- Contact blocks are available with silver contacts or gold plated contacts
- Self-wiping contacts

Panel Mount

Normally Open Silver	**S1**
Normally Closed Silver	**S2**
Normally Open Gold Plated	**S3**
Normally Closed Gold Plated	**S4**

Base Mount*

Normally Open Silver	**S5**
Normally Closed Silver	**S6**
Normally Open Gold Plated	**S7**
Normally Closed Gold Plated	**S8**

** For use with non-illuminated operators in thermoplastic or aluminum enclosures listed on pages 30 and 36-37.*

22mm Non-Illuminated Metal Operators

Dimensional Drawings

All dimensions shown in millimeters.
To convert to inches multiply by 0.03937

Non-Illuminated Flush

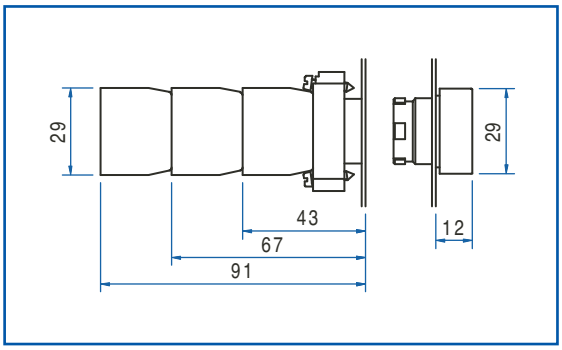

Non-Illuminated Booted

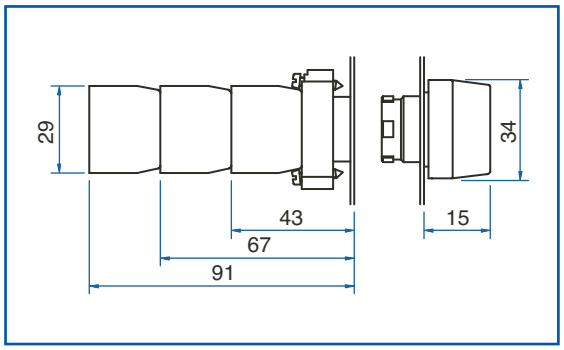

Non-Illuminated Projecting

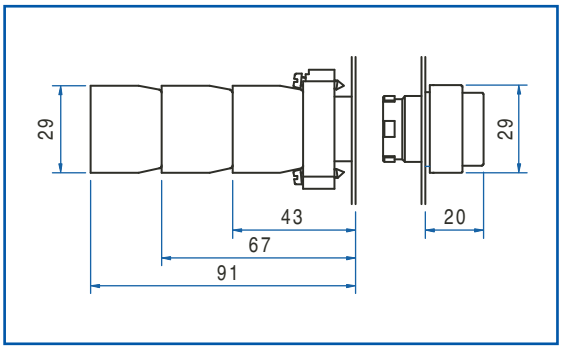

Non-Illuminated Recessed

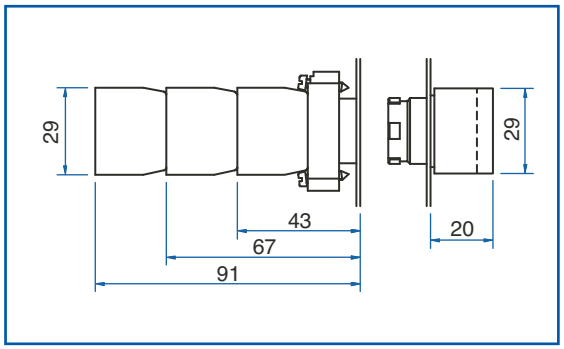

Exploded Assembly View

- *Up to six switch contacts can be installed on any non-Illuminated operator.*
- *Up to four switch contacts can be installed if maintained action attachment (2PPM) is used.*
- *Switch contacts and operators are sold separately. Preassembled push buttons are available on request.*

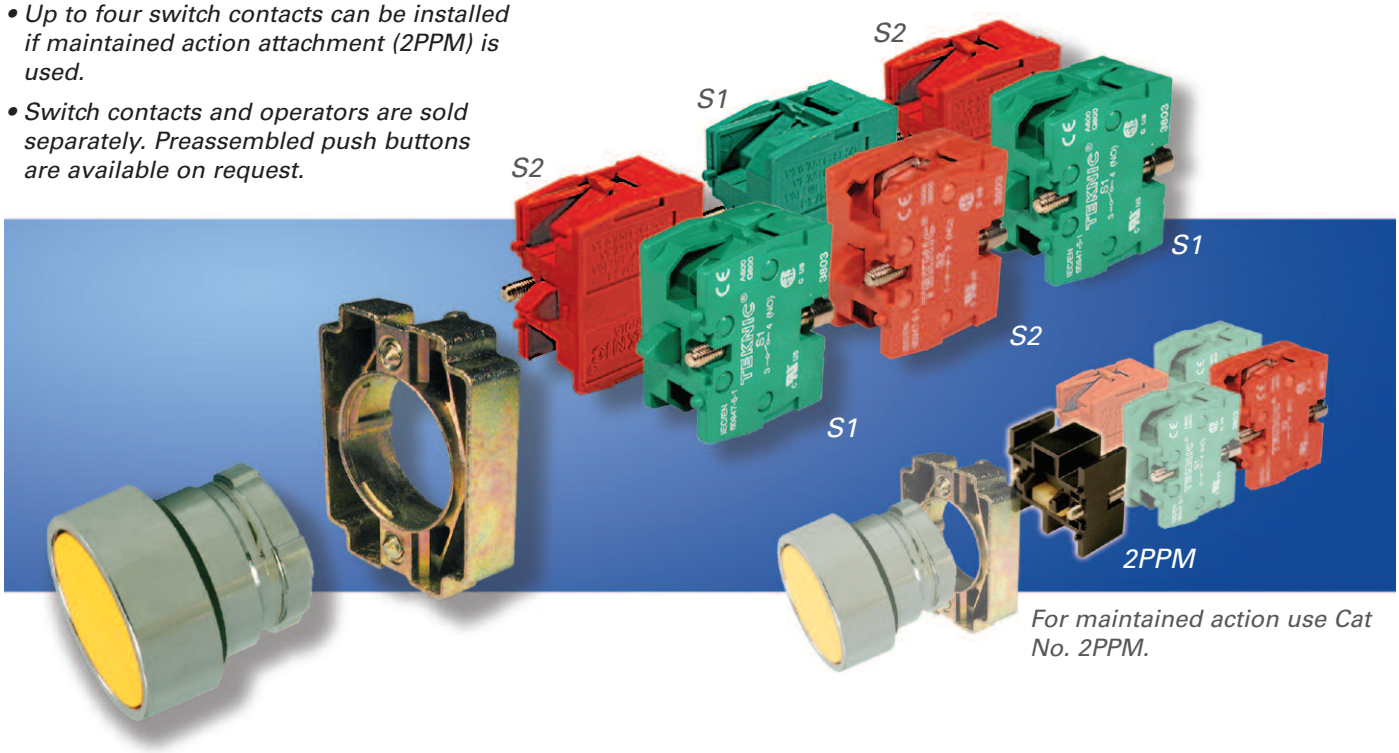

For maintained action use Cat No. 2PPM.