

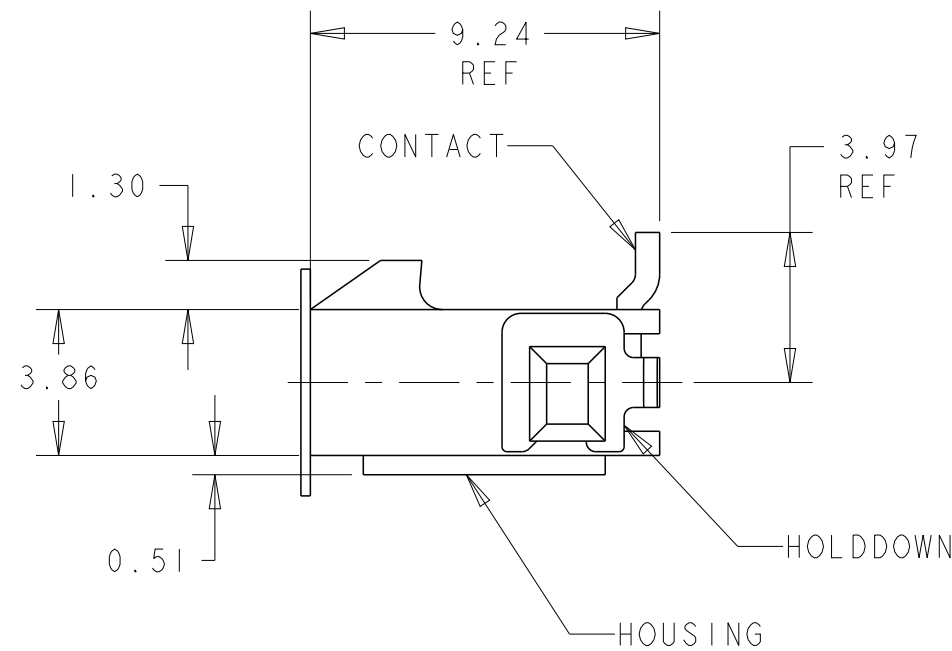


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECR-16-011494	21JUN2017	NK	CX

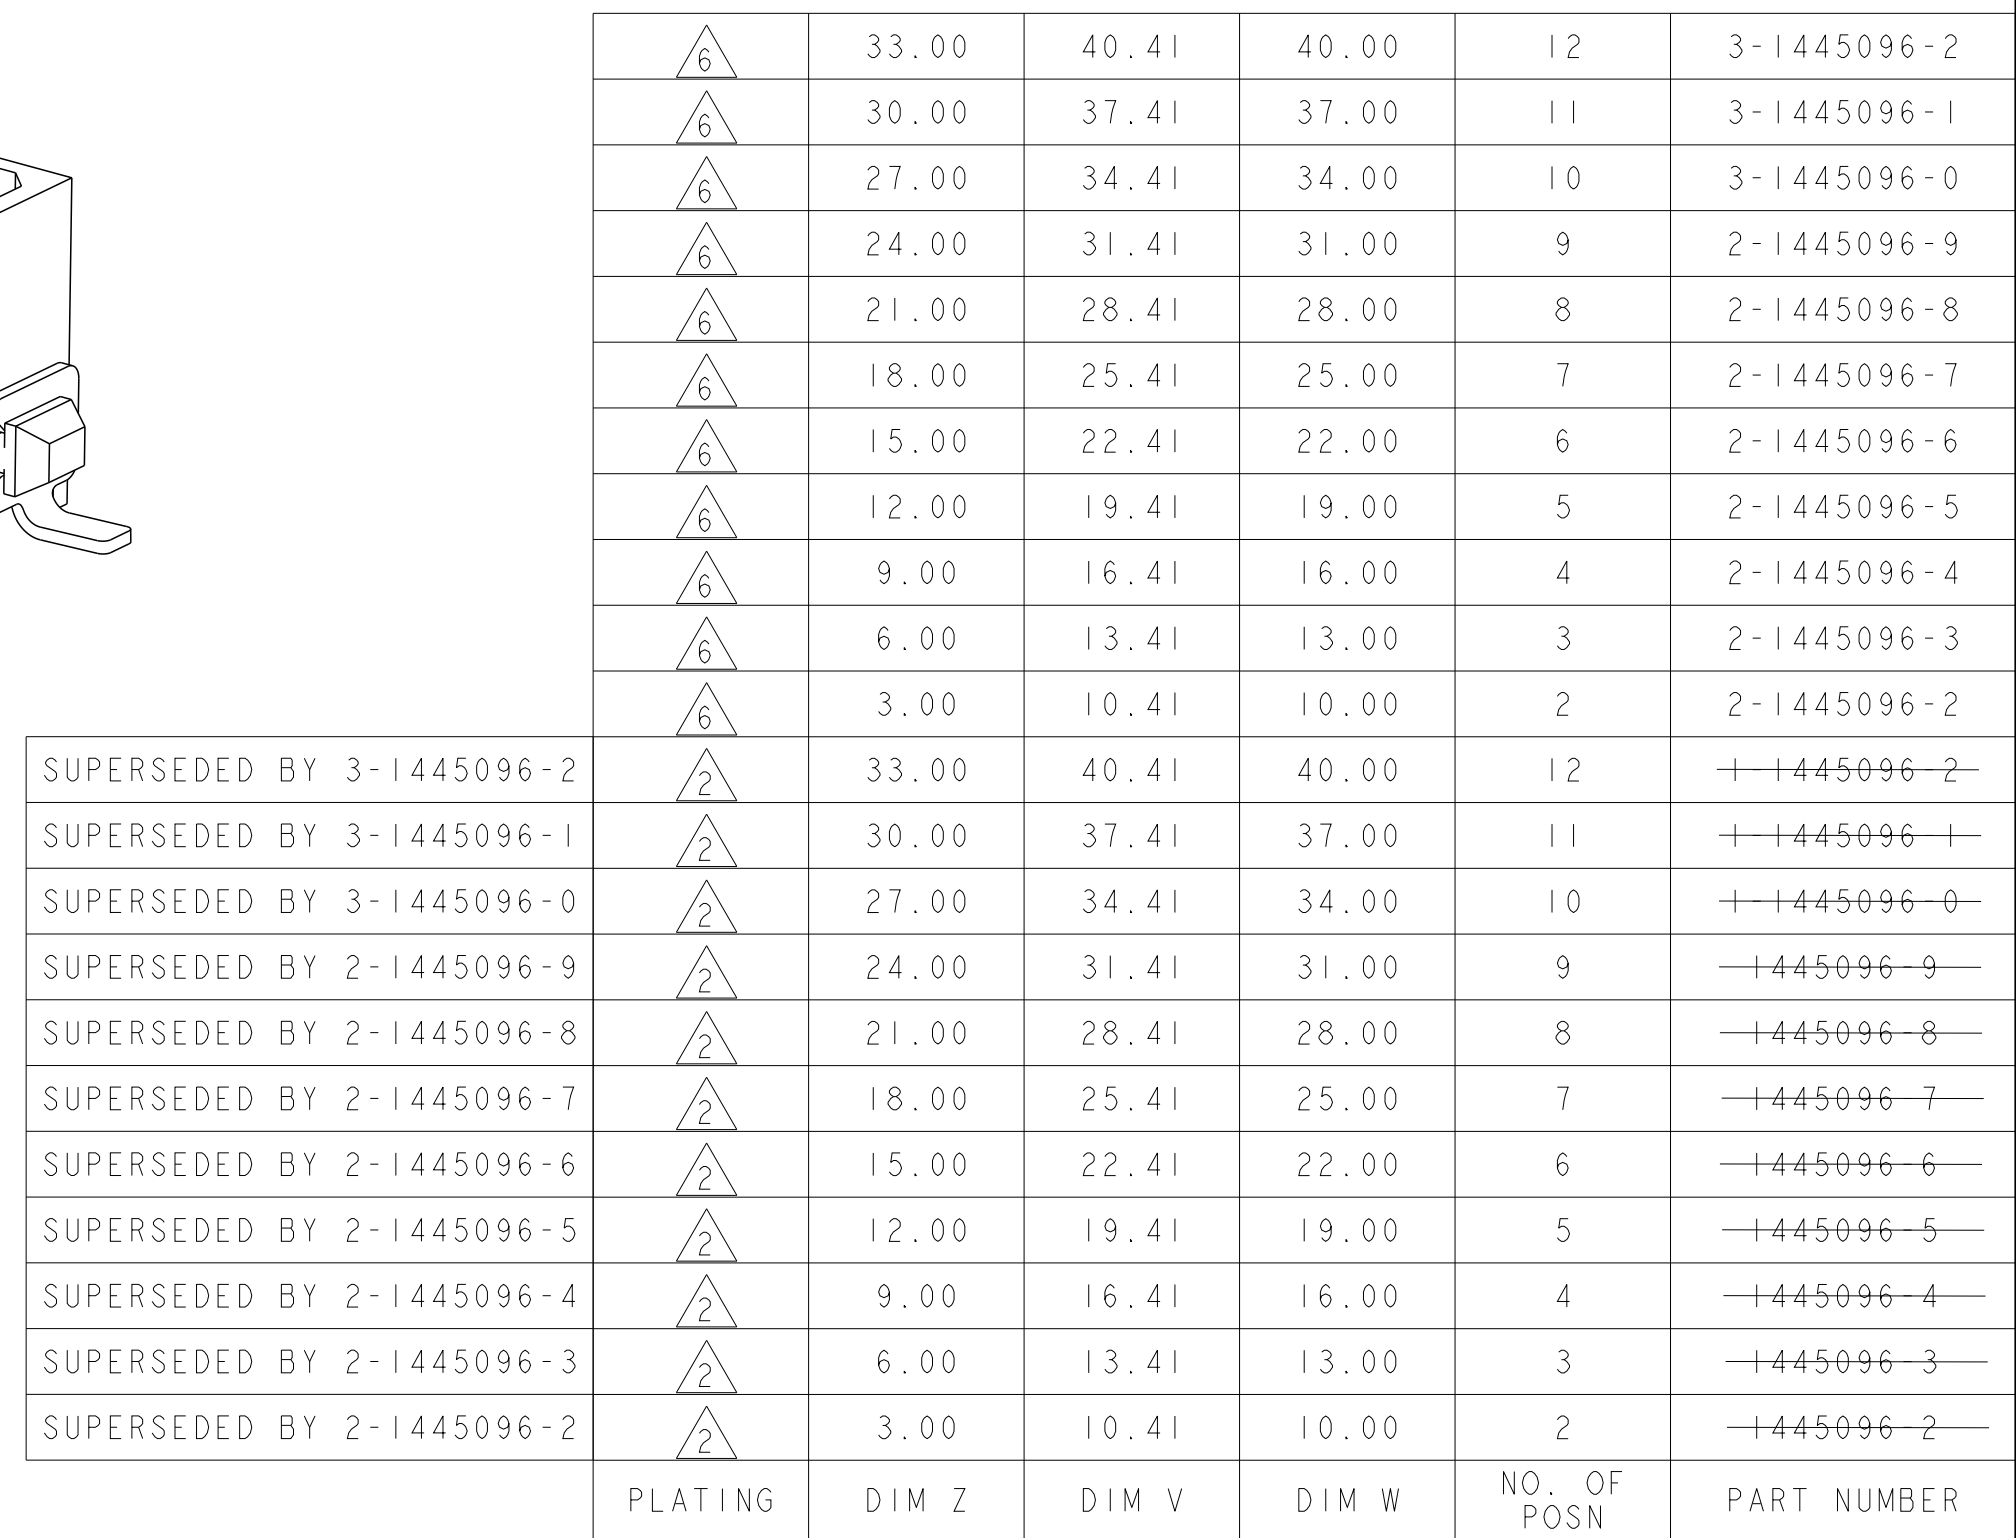

6 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END.
2.54µm MINIMUM TIN ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM
NICKEL.



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 09OCT2000		 TE Connectivity					
		CHK K. WHITAKER 20-FEB-2001							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL SURFACE MOUNT HEADER ASSY, 30 MIC GOLD CONTACTS, SURF MOUNT HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™					
mm		APVD C. JONES 20-FEB-2001							
		PRODUCT SPEC							
		APPLICATION SPEC							
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
 SEE TABLE		-		A2	00779	C-1445096	-		
CUSTOMER DRAWING						SCALE	SHEET	OF	REV
						5:1	1		D2