


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0760551828](#)
Status: **Active**
Overview: [Impact™ Backplane Connectors and Cable Assemblies](#)
Description: Impact™ 100 Ohm 5 Pair Vertical Backplane Header, Unguided, Dual Endwall, 8 Columns, 120 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:
[Drawing \(PDF\)](#) [Application Specification AS-76060-9999 \(PDF\)](#)
[Product Specification PS-76060-999 \(PDF\)](#) [Packaging Specification PK-70873-7702 \(PDF\)](#)
[Application Specification AS-76060-990 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76055
Application	Conventional, Mezzanine
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
UPC	884982484252
Physical	
Circuits (Loaded)	120
Circuits (maximum)	120
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.364/g
Number of Columns	8
Number of Pairs	5
Number of Rows	15
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

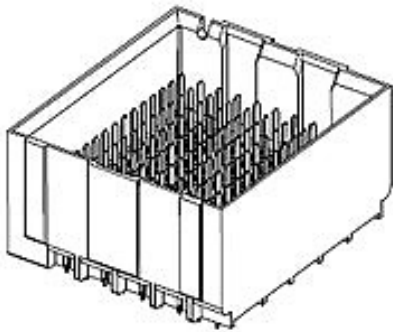

Series image - Reference only

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant
REACH SVHC
Not Contained Per
-ED/79/2015 (17
December 2015)
Halogen-Free
Status
Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image
ELV Not Relevant

Search Parts in this Series
[76055](#) Series

Mates With
[76060](#) Impact™ 100 Ohm Daughtercard

Use With
[75234](#) Backplane Free Standing Guide Pin

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.
Global

Description	Product #
Backplane Insertion Tool for Signal Contact	0621005800

Current - Maximum per Contact	0.75A	Backplane Header <u>0621009610</u> Removal Tool for GbX® U-Series, GbX I-Trac™, Impact™, or Z-PACK Tinman*
Data Rate	25.0 Gbps	
Impedance	100#	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990, AS-76060-9999	
Packaging Specification	PK-70873-7702	
Product Specification	PS-76060-999	
Sales Drawing	RSD-173430-001, SD-76055-001	
Symbol/Footprint Data	SYM-76055-1828	

This document was generated on 06/09/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION