



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31490145	2014-09-02	Joyy	Change to 94V0 material




3
Sealing Nut





2
Seals



4
Support

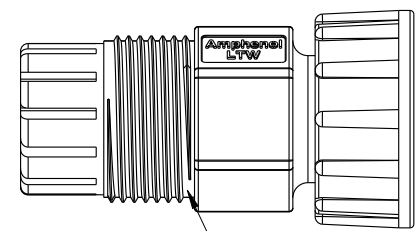

1 Half-Finished Goods :
(Housing+ Gasket+ Lock Nut)

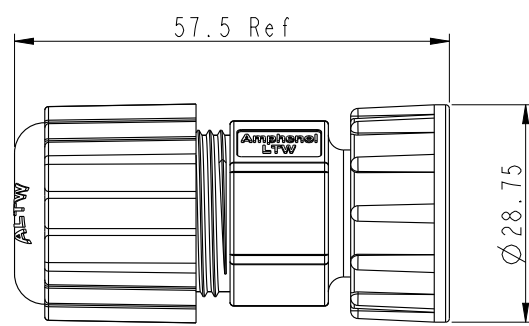

- Note:
- * Important Dimension
 - * Waterproof Rate : IP67 (Mated)
 - * Half-Finished Goods:
 - Housing : Nylon66,Black
 - Gasket : Silicone,Gray
 - Lock Nut : Nylon+GF,Black
 - * Support: PVC,Black
 - * Sealing Nut: FR50, BK505
 - * Seals: Silicone,Gray.
 - * Cable OD Range :5.0~6.5mm
 - * Sealing Nut Torsion Value Range: 8~15kgf-cm
 - * One Set Unassembled in One PE Bag.

UNIT:mm				TITLE RJ45 FEED-THRU,3T LOCK,DSIZE		ITEM NO RDP-00BMMS-TLM7001		DRAWN BY Joyy		DATE 2014-09-02	
TOLERANCE		SCALE		SIZE		DWG NO RDP-00BMMS-TLM7001		CHECKED BY Tom		DATE 2014-09-02	
.X ±0.25		1:1		A4		SHEET 1 OF 1		APPROVED BY VICTOR		DATE 2014-09-02	
.XX ±0.1		REV. B		WC-REV. A.4		CUSTOMER ALTW					
.XXX ±0.05											
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司

: Inspection item