



2		1					
LOC	DIST	REVISIONS					
IR	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			G5	REVISED PER ECR-16-008286	27JUN2016	BW	RS

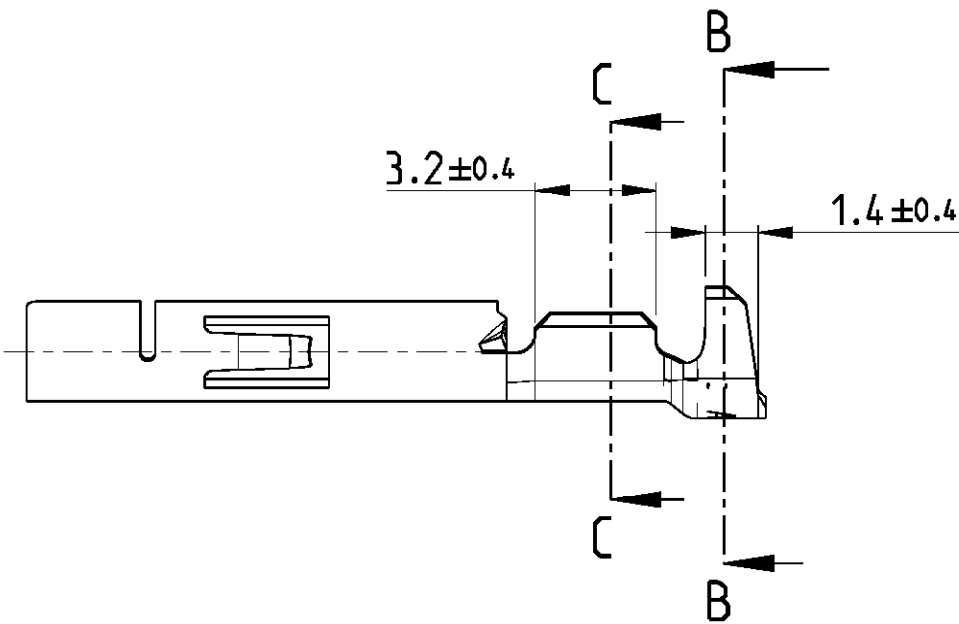


- 1



Au IN MATING ZONE, Sn IN CRIMP ZONE, Ni ON ENTIRE BODY OF TERMINAL.
- 3

INSULATION WIRE RANGE: Ø1.0-2.5mm.
- 6


SLOT IS ONLY AVAILABLE FOR 926895-1 & 926895-3.

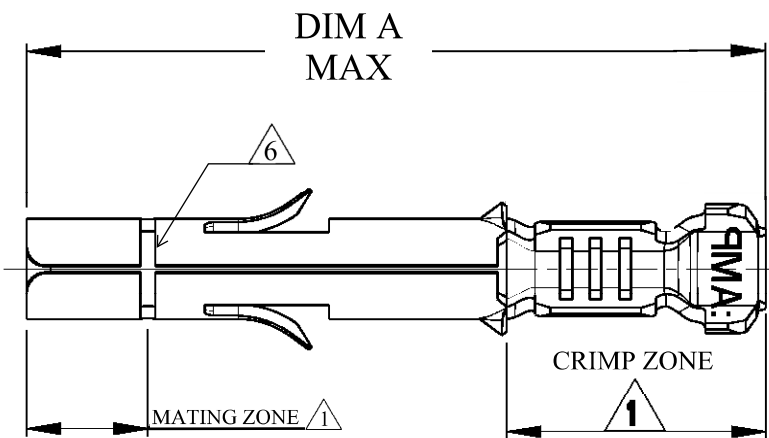

926895-1 & -3 SHOWN

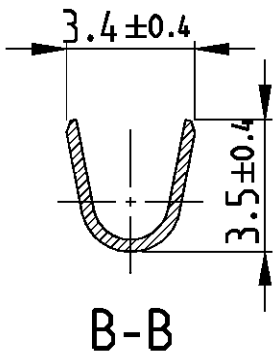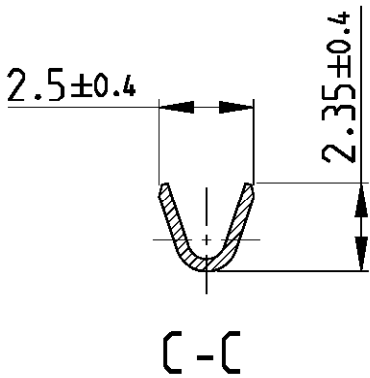

OBSOLETE	19.56	1	BRASS	926895-7
	19.35	1	PHOSPHOR BRONZE	926895-6
OBSOLETE	19.35	PRE-TIN PLATED	PHOSPHOR BRONZE	6 926895-3
	19.35		BRASS	926895-2
	19.35	PRE-TIN PLATED	BRASS	6 926895-1
DIM A		FINISH	MATERIAL	PART NO.
		COLOUR		

		DWN J.SALO 10NOV2008		TE TE Connectivity											
		CHK R.SOLE 10NOV2008													
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P.F.GRASSANO 10NOV2008		NAME									
mm				PRODUCT SPEC		UNIVERSAL M-N-L SOCKET 0.2-0.8 SQ.MM WIRE RANGE									
				108-1031											
				APPLICATION SPEC											
				114-1010											
MATERIAL		FINISH		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
SEE TABLE		SEE TABLE		-		A3		-		C-926895		-			
CUSTOMER DRAWING						SCALE		5:1		SHEET		1 OF 1		REV G5	