


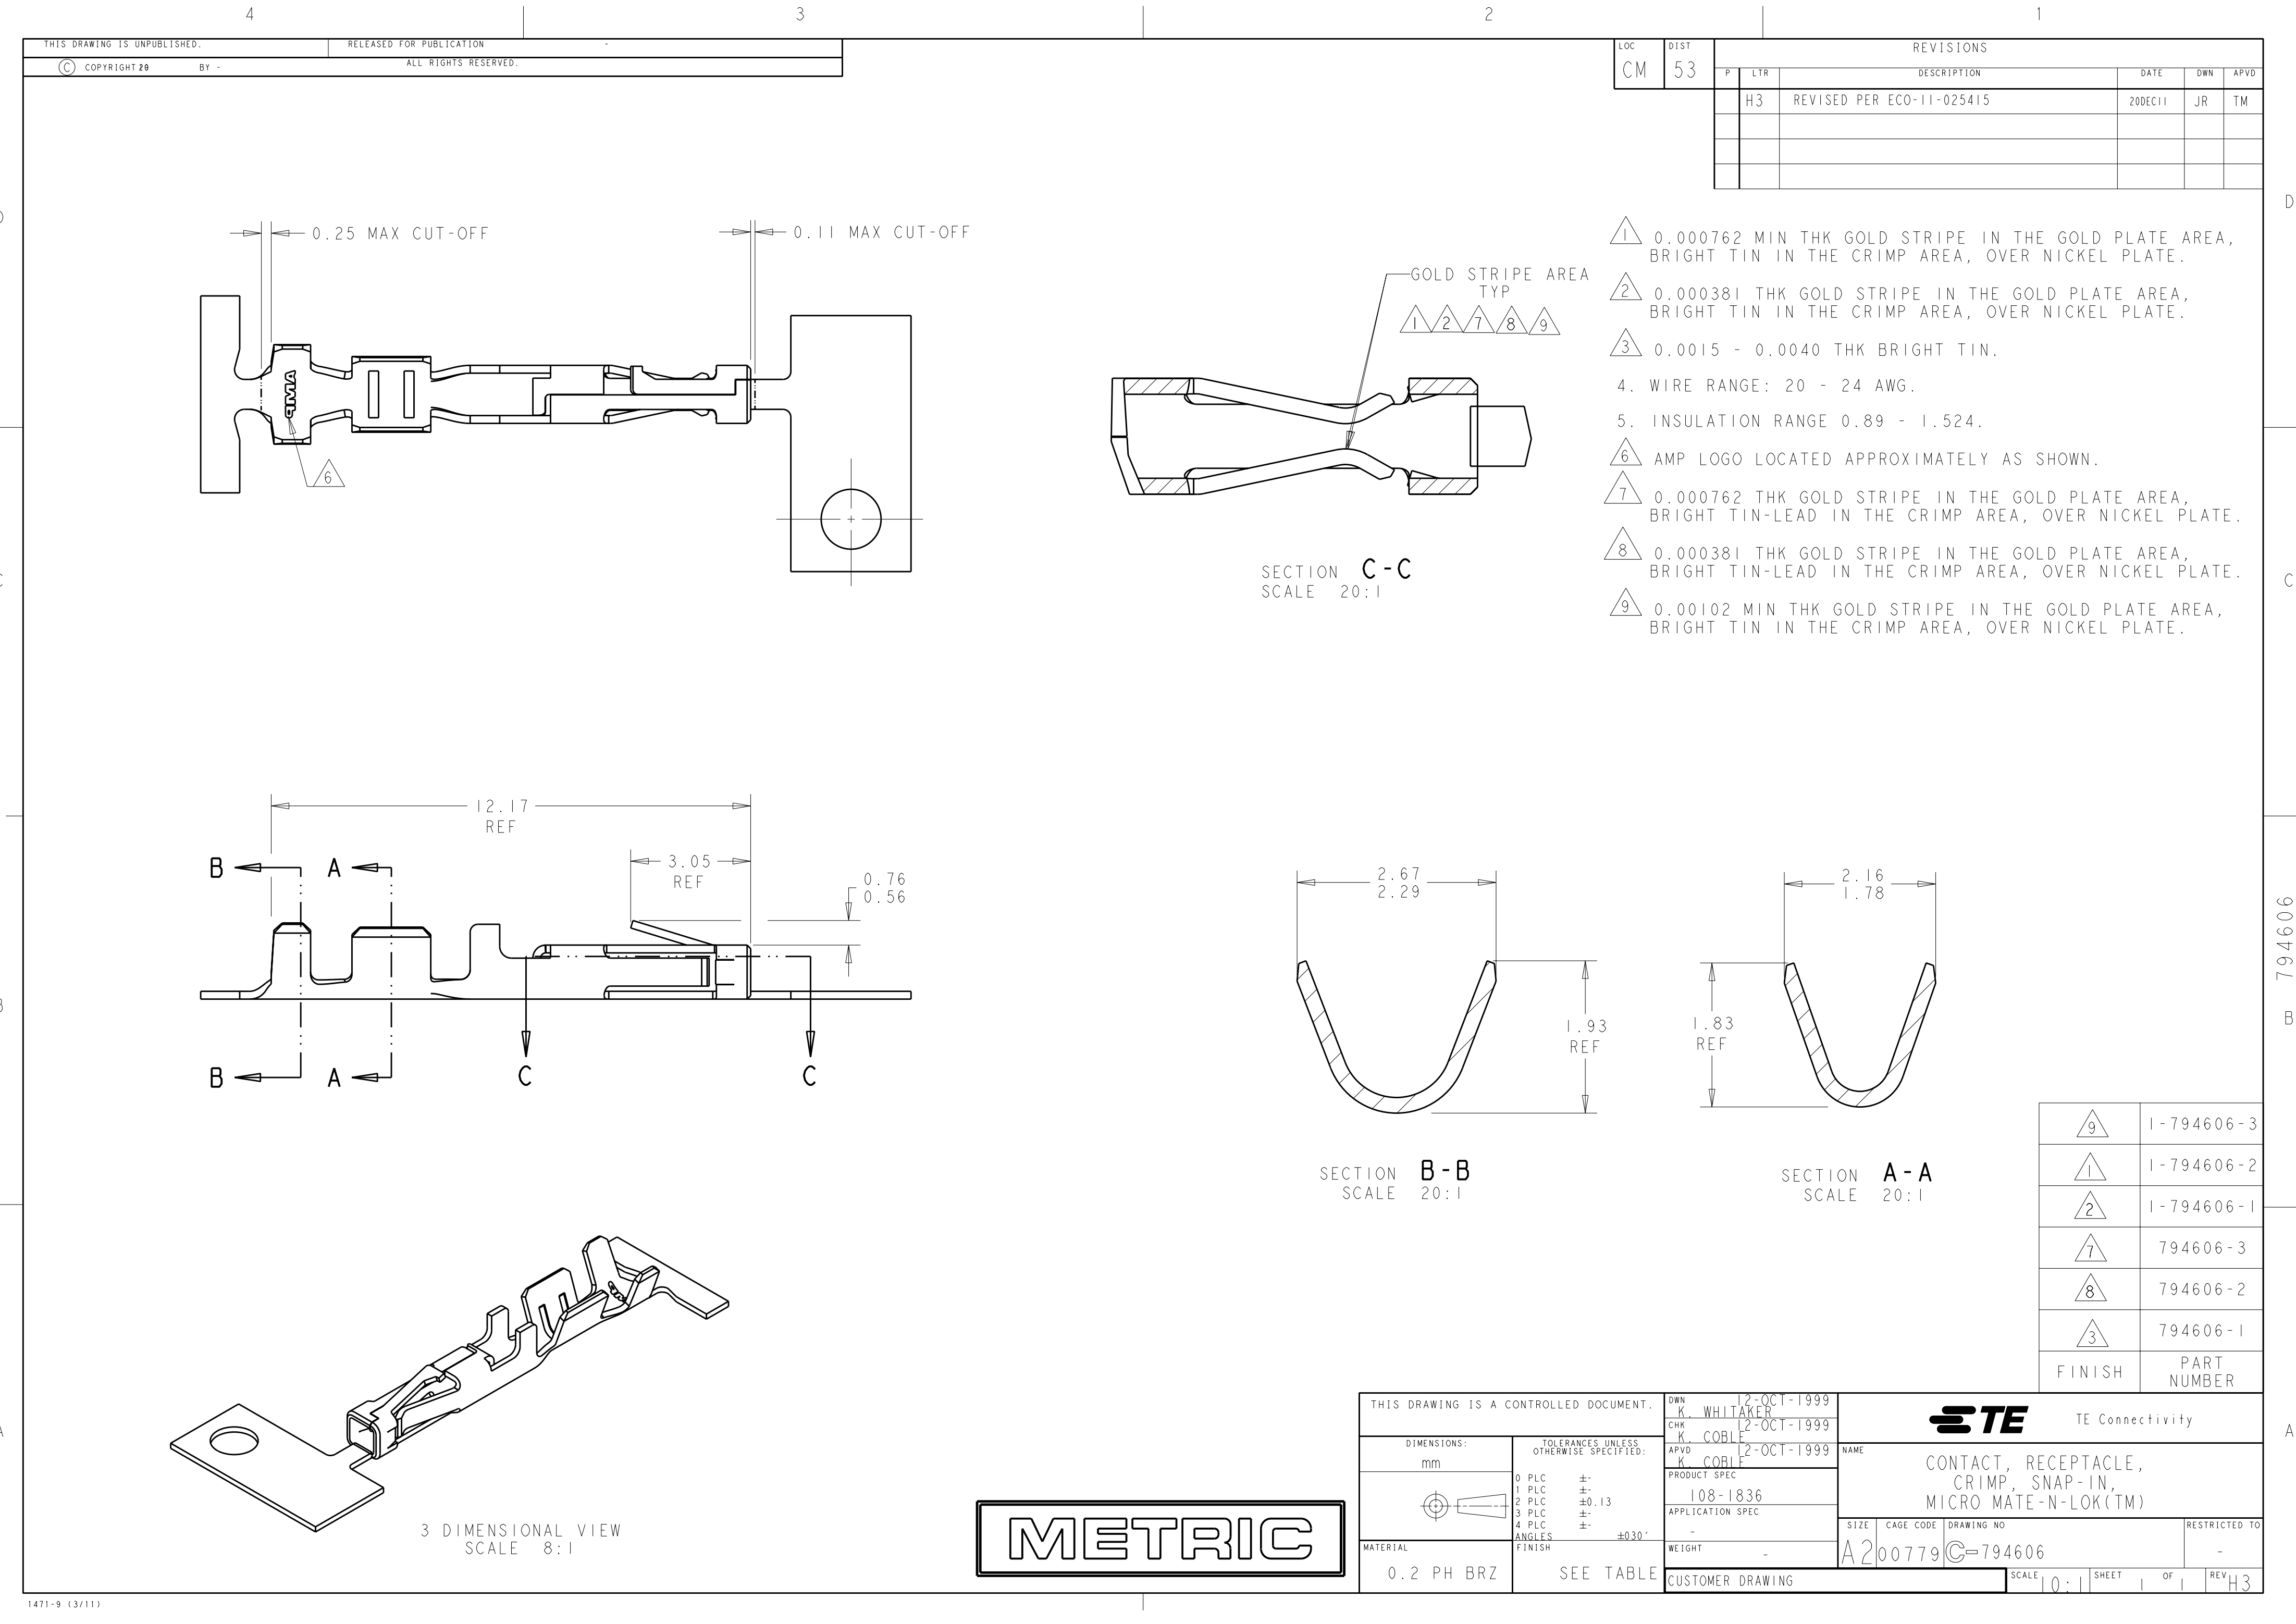

THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION					
COPYRIGHT 20				ALL RIGHTS RESERVED.					
LOC		DIST		REVISIONS					
CM		53		P	LTR	DESCRIPTION	DATE	DWN	APVD
					H3	REVISED PER ECO-11-025415	20DEC11	JR	TM

0.25 MAX CUT-OFF

0.11 MAX CUT-OFF

6

GOLD STRIPE AREA TYP

1 2 7 8 9

SECTION C-C

SCALE 20:1

1 0.000762 MIN THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.

2 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.

3 0.0015 - 0.0040 THK BRIGHT TIN.

4. WIRE RANGE: 20 - 24 AWG.

5. INSULATION RANGE 0.89 - 1.524.

6 AMP LOGO LOCATED APPROXIMATELY AS SHOWN.

7 0.000762 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.

8 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.

9 0.00102 MIN THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.

12.17 REF

3.05 REF

0.76

0.56

B A C C

2.67

2.29

1.93 REF

SECTION B-B

SCALE 20:1

2.16

1.78

1.83 REF

SECTION A-A

SCALE 20:1

3 DIMENSIONAL VIEW

SCALE 8:1

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12-OCT-1999	TE Connectivity	
DIMENSIONS: mm		CHK K. COBLE 12-OCT-1999	NAME CONTACT, RECEPTACLE, CRIMP, SNAP-IN, MICRO MATE-N-LOK(TM)	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 12-OCT-1999	SIZE CAGE CODE DRAWING NO	
0 PLC ±		PRODUCT SPEC 108-1836	A200779C-794606	
1 PLC ±		APPLICATION SPEC -	RESTRICTED TO -	
2 PLC ±0.13		WEIGHT -	SCALE 10:1 SHEET 1 OF 1 REV H3	
3 PLC ±		CUSTOMER DRAWING		
4 PLC ±				
ANGLES ±0.30°				
FINISH				
MATERIAL 0.2 PH BRZ		SEE TABLE		