


LOW POWER CONSUMPTION

conga-QMX6




- Up to NXP i.MX6 Quad ARM Cortex A9
- Multimedia Performance with HDMI & LVDS
- Camera Interface MIPI CSI-2 on flat foil connector
- Extended longevity, min. 10 years
- Temperature range up to -40°C .. +85°C

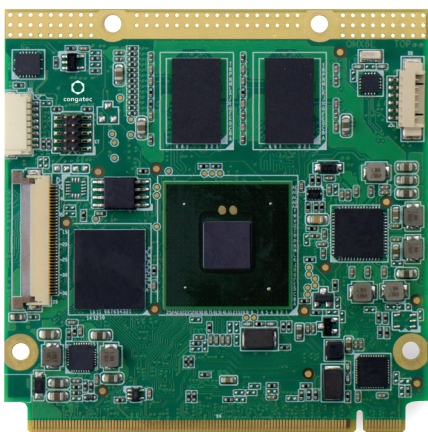

Formfactor	Qseven Rev. 2.0 70x70 mm		
CPU	NXP i.MX6 ARM Processors		
	NXP i.MX6 Solo ARM Cortex A9	up to 1.0 GHz*	L2 cache 512kB
	NXP i.MX6 Dual Lite ARM Cortex A9	up to 1.0 GHz*	L2 cache 512kB
	NXP i.MX6 Dual ARM Cortex A9	up to 1.0 GHz*	L2 cache 1MB
	NXP i.MX6 Quad ARM Cortex A9	up to 1.0 GHz*	L2 cache 1MB
	* Core Frequency: 1.0 GHz for commercial grade 800 MHz for industrial grade		
DRAM	Up to 2 GByte onboard DDR3 memory 1066 MT/s		
Ethernet	1x 1 Gbit Ethernet		
I/O Interfaces	5x USB 2.0 (shared with 1x USB OTG client) 1x SATA II (optional) 1x SDIO 1x PCIe 2.0 I ² C Bus CAN Bus SPI		
Mass Storage	Onboard Solid State Drive (eMMC) up to 16 GByte (optional) Onboard MicroSD socket		
Sound	I ² S		
Graphics	Integrated in NXP i.MX6 Series Video (VPU) 2D Graphics (GPU2D) and 3D Graphics (GPU3D) 3D graphics with 4 shaders up to 200MT/s dual stream 1080p/720p decoder/encoder. OpenGL OpenCL and OpenVG 1.1		
Video Interfaces	HDMI v1.4 support supported by Qseven specification. 2x LVDS (2x 24 bit) 1x LVDS (1x 24 bit) up to WUXGA resolution 1920x1200 pixel and HD1080. Supports 18bit and 24bit dual channel up to WUXGA 1920x1200.		
Features	Watchdog Timer I ² C bus (fast mode 400 kHz multi-master) JTAG debug interface CAN interface Camera Interface MIPI CSI-2 on flat foil connector High Precision Real Time Clock		
Embedded BIOS Features	U-Boot boot loader		
Operating Systems	Android Windows Embedded Compact 7 Linux BSPs with OS drivers and tools		
Power Consumption	Typ. application ~3.5 Watt @ 5V		
Temperature	Operating: 0 to +60°C commercial grade -40 to +85°C industrial grade Storage: -40 to +85°C		
Humidity	Operating: 10 to 90% r. H. non cond. Storage: 5 to 95% r. H. non cond.		
Size	70 x 70 mm (2¾" x 2¾")		

conga-QMX6 | Block diagram

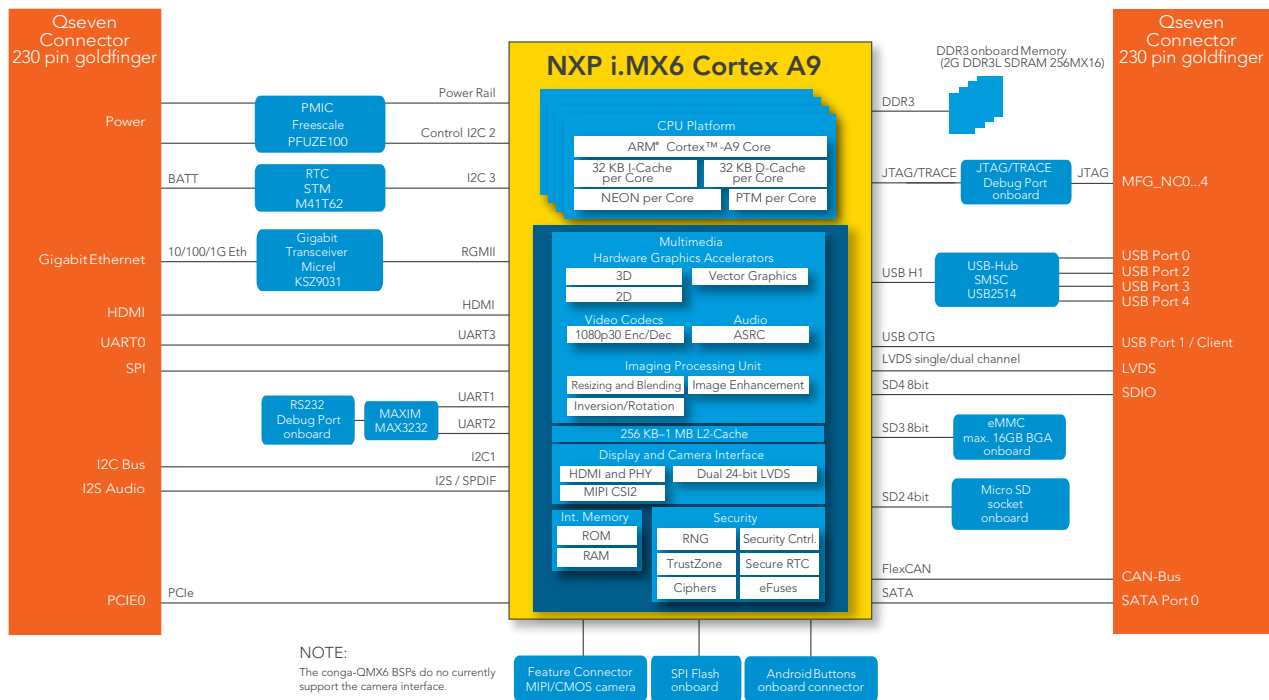

conga-QMX6 | Order Information

Article	PN	Cores	Clock speed	L2 cache	3D Graphics	2D Graphics	RAM	SATA	
conga-QMX6/SC-1G eMMC4	016100	1	1 GHz (commercial temperature)	512 KB	1 shader	1 engine	1 GByte DDR3L 400 Mhz	-	
conga-QMX6/DCL-1G eMMC4	016101	2		512 KB	1 shader	1 engine	1 GByte DDR3L 400 Mhz	-	
conga-QMX6/DC-1G eMMC4	016102	2		1 MB	4 shader	2 engines	1 GByte DDR3L 533 Mhz	SATA II	
conga-QMX6/QC-1G eMMC4	016103	4		1 MB	4 shader	2 engines	1 GByte DDR3L 533 Mhz	SATA II	
conga-QMX6/QC-2G eMMC4	016104	4	800MHz (industrial temperature)	1 MB	4 shader	2 engines	2 GByte DDR3L 533 Mhz	SATA II	
conga-QMX6/QC-2G eMMC8	016105	4		1 MB	4 shader	2 engines	2 GByte DDR3L 533 Mhz	SATA II	
conga-QMX6/QC-1G eMMC8	016106	4		1 MB	4 shader	2 engines	1 GByte DDR3L 533 Mhz	SATA II	
conga-QMX6/SC-512MB	016107	1		512 KB	1 shader	1 engine	512 MB DDR3L 400 Mhz		
conga-QMX6/iSC-1G eMMC4	016110	1		512 KB	1 shader	1 engine	1 GByte DDR3 400MHz	-	
conga-QMX6/iDCL-1G eMMC4	016111	2		512 KB	1 shader	1 engine	1 GByte DDR3 400MHz	-	
conga-QMX6/iDC-1G eMMC4	016112	2		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II	
conga-QMX6/iQC-1G eMMC4	016113	4		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II	

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. Dec 17, 2015 MR