







6 Pin Male Connector
Female Pin PCB Layout

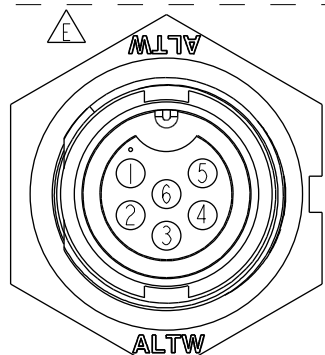

Pin Assignments
Front View

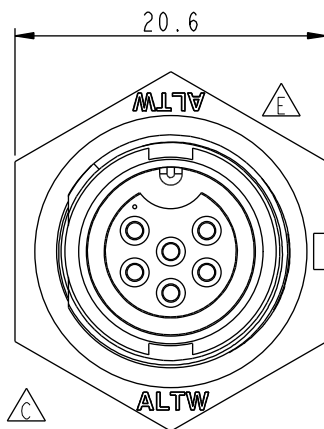

Recommended Panel Cut-out

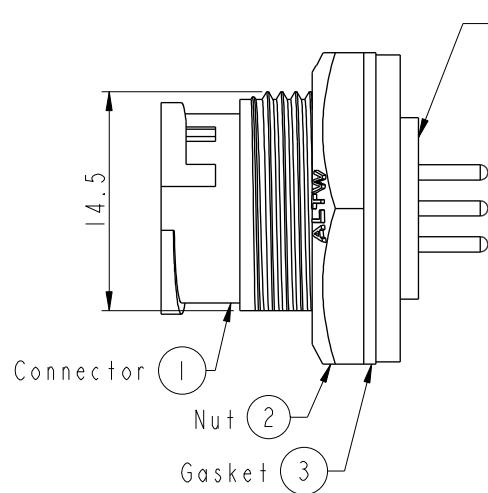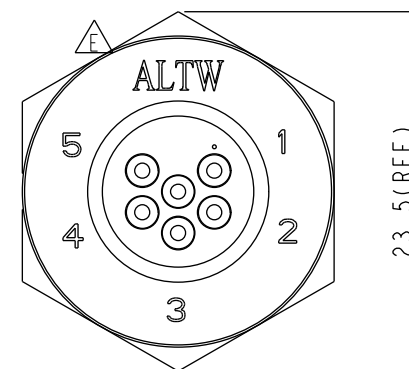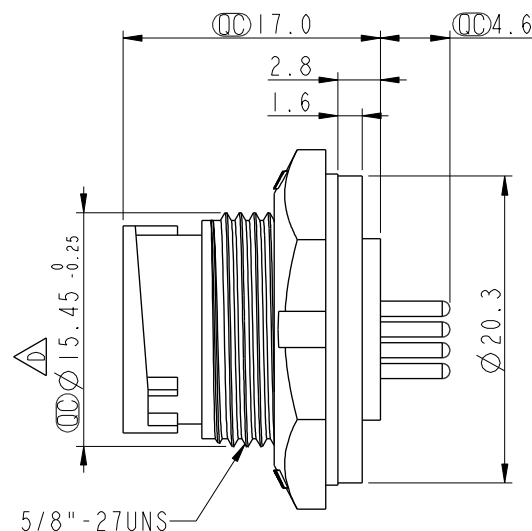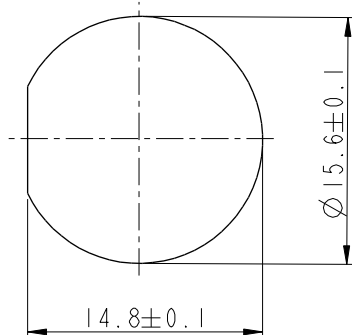

Note:

- * Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm
- * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.5mm
- * Gasket and Nut are packed separately in PE bags.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-930920	2009/03/10	Jiang Jun Hua	Change Tolerance
E	LEN1540270	2014/12/05	Jinhai	Change Logo LTW To ALTW
F	CI90273	2019/02/23	Ruru	Modify Note

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE	Standard Panel Lock 6Pin M Conn F Pin		
SCALE	2:1	SIZE	A4
REV.	F	WC-REV.	A.3
SHEET 1 OF 1			
QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	BD-06PMFP-LC7001	DRAWN BY	Ruru	DATE	2019-02-23
DWG NO	BD-06PMFP-LC7001	CHECKED BY	Rita	DATE	2019-02-23
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-23

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.