
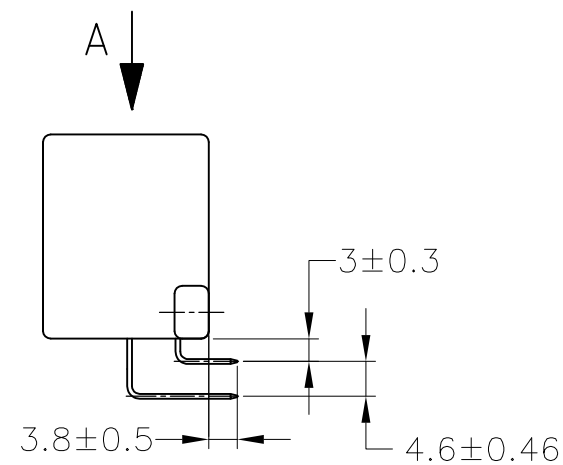
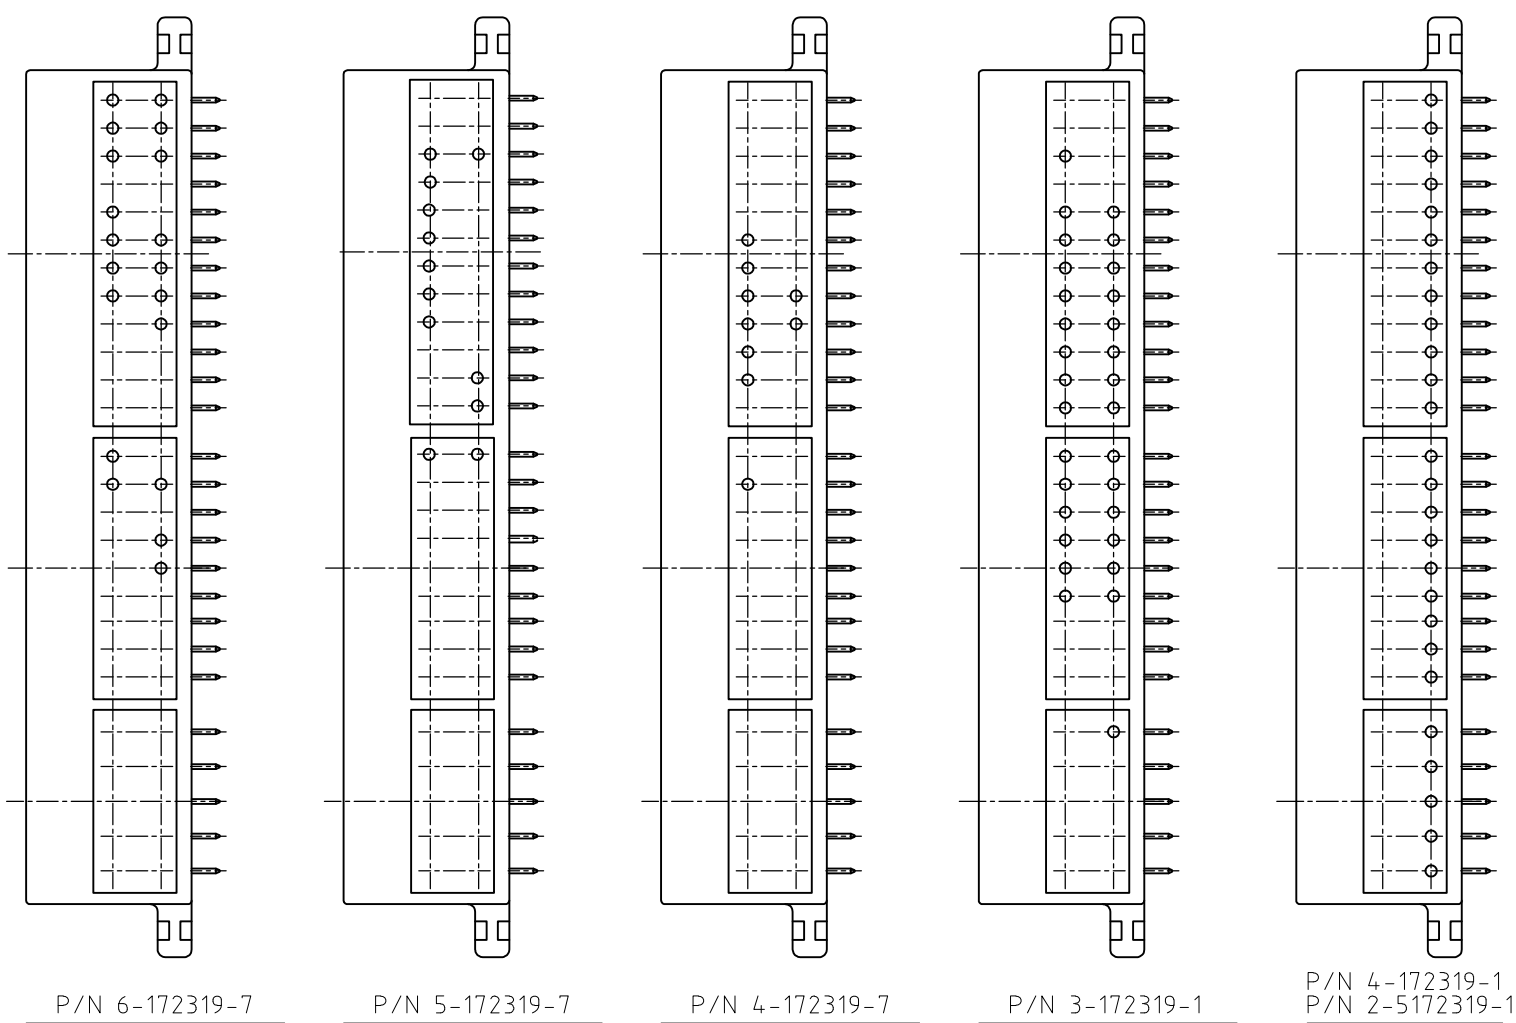
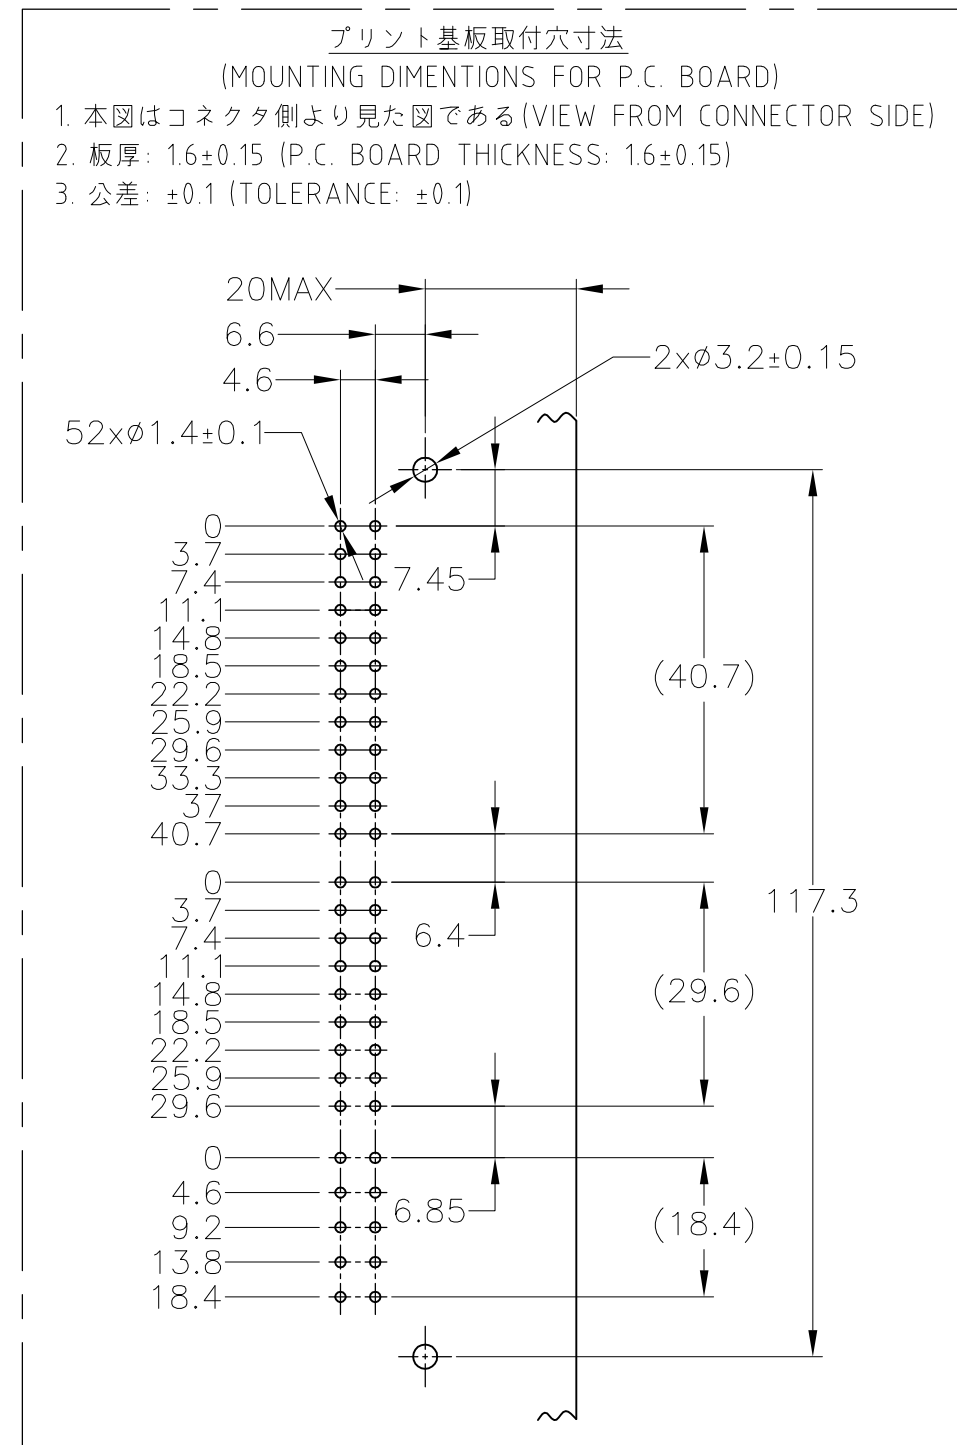


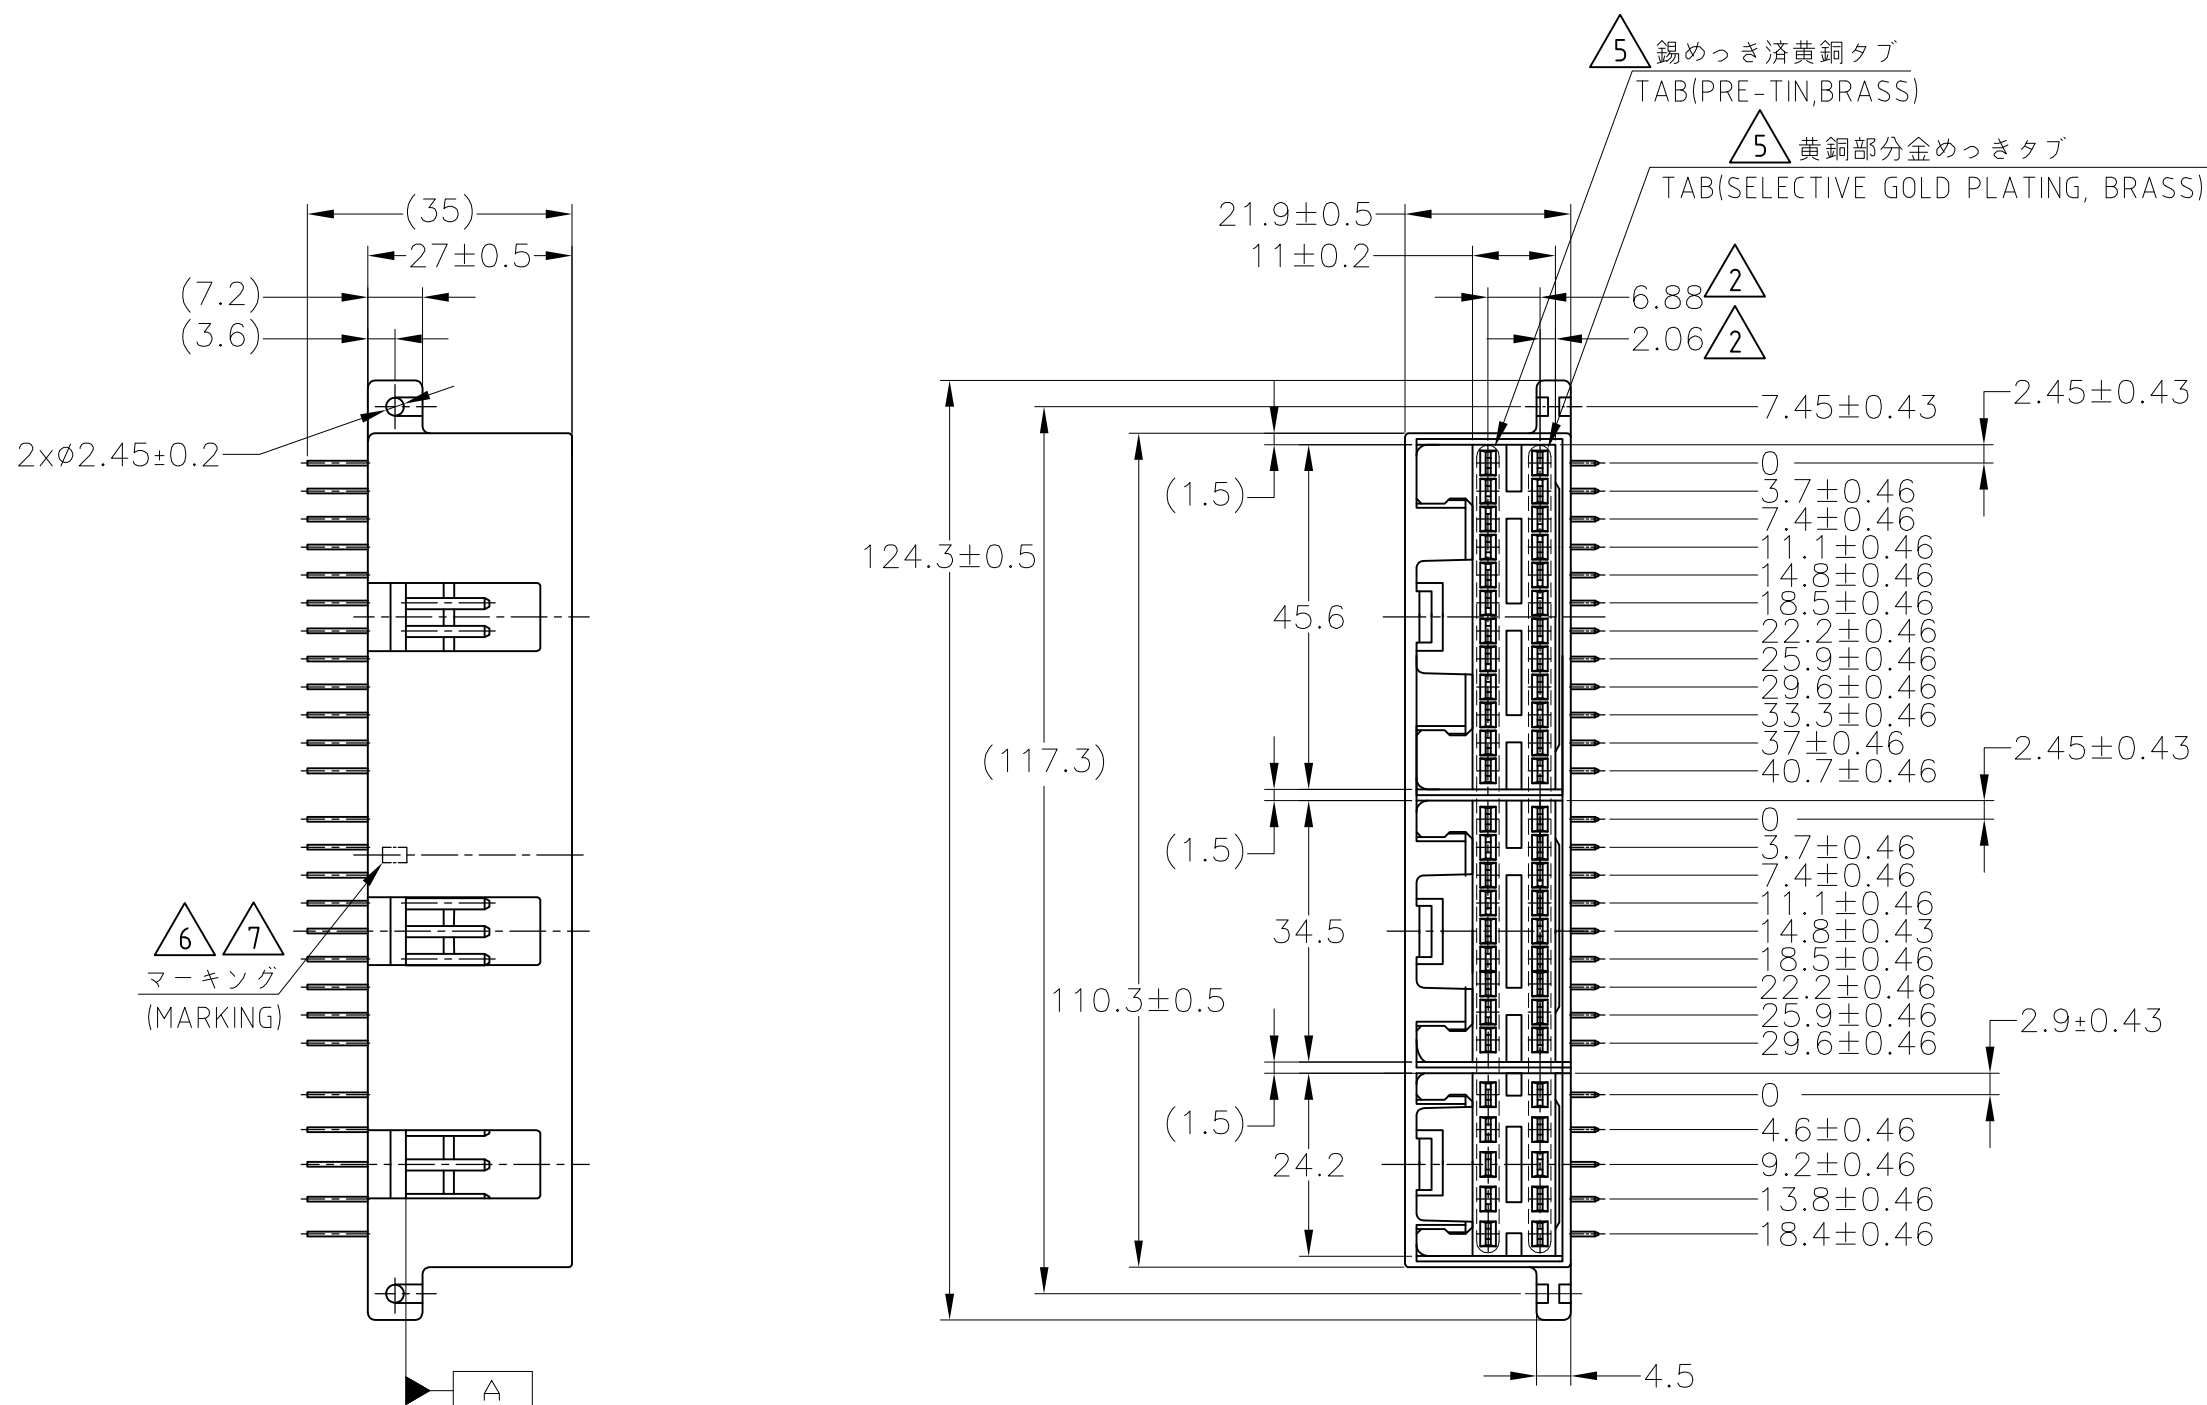

1. THE MATING COUNTERPART
P/N;10Pos 172315. 18Pos 172316. 24Pos 172317
2. TO BE MEASURED WITHIN 2mm FROM A
3. SELECTIVE GOLD PLATED (CONTACT AREA) TIN LEAD
PLATED (SOLDERING AREA) OVER NICKEL PLATED
4. SOLDERING AFTER MOUNTING P.CBOARD SECURE BY USING M3,
PAN HEAD TAPPING SCREW
5. APPLICABLE PART NUMBERS; 2-172319-1,-7
6. INDICATED PREFIX AND SUFFIX OF PRODUCT P/N BY HOT STAMP
(APPLICABLE P/N 5-172319-7)
7. CHARACTERS MUST BE CLEAR AND LEGIBLE
- 1 嵌合する相手ハウジング型番; 10極 172315 18極 172316 24極 172317
- 2 A 面より2mmの範囲で測定のこと
- 3 全面ニッケルメッキ上に部分メッキ(嵌合部)及び半田メッキ(半田付部)
4. プリント基板への取付けは M3のタッピンネジ(JIS B1115 1種)で締付けた後
半田付けをする
- 5 2-172319-1,-7のみに適用
- 6 製品型番のプリフィックスをカラーホットマーキングにより表示する
(適用型番5-172319-7)
- 7 文字は明瞭であること

	SELECTIVE TIN (MATTE)	SELECTIVE GOLD x 26	YELLOW 黄色	2-5172319-1
	PRE-TIN x 26			
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD x 52	YELLOW 黄色	1-5172319-7
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD x 52	GRAY 灰色	1-5172319-6
OBSOLETE	TIN-LEAD x 52		YELLOW 黄色	8-172319-7
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 19	YELLOW 黄色	6-172319-7
	PRE-TIN x 33			
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 12	YELLOW 黄色	6△7 5-172319-7
	PRE-TIN x 40			
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 9	YELLOW 黄色	4-172319-7
	PRE-TIN x 43			
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 26	NATURAL 自然色	4-172319-1
	TIN-LEAD x 26			
	TIN-LEAD	SELECTIVE GOLD x 30	NATURAL 自然色	3-172319-1
	TIN-LEAD	PRE-TIN x 22	NATURAL 自然色	3-172319-1
	TIN-LEAD	SELECTIVE GOLD x 26	NATURAL 自然色	△5 2-172319-7
	PRE-TIN x 26			
	TIN-LEAD	SELECTIVE GOLD x 26	YELLOW 黄色	△5 2-172319-1
	PRE-TIN x 26			
	TIN-LEAD △3	SELECTIVE GOLD x 52	YELLOW 黄色	1-172319-7
	TIN-LEAD △3	SELECTIVE GOLD x 52	GRAY 灰色	1-172319-6
	PRE-TIN x 52		YELLOW 黄色	172319-7
	PRE-TIN x 52		NATURAL 自然色	172319-1
	SOLDERING SIDE 半田付け部	CONTACT SIDE 接合部側	COLOR 色	PART NUMBER 製品型番
	CONTACT FINISH コンタクト仕上			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.FUJITA 04AUG08 CHK T.SHINOHARA 04AUG08 APVD K.BETSUI 04AUG08		 TE Connectivity	
DIMENSIONS: 単位: 純 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差			
		0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH 仕上		NAME 名称 52POSITION CAP HOUSING ASSY PULSE LOCK CONNECTOR	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 10 _μ ±0.2 30 _μ ±0.25 100 _μ ±0.3 ANGLE 3°		MATERIAL 材料 PBT		SIZE A2 CAGE CODE 00779 DRAWING NO 番号 C-172319 RESTRICTED TO —	
		WEIGHT —		SCALE 尺度 1:1 SHEET 1 of 1 REV K4	
CUSTOMER DRAWING					