
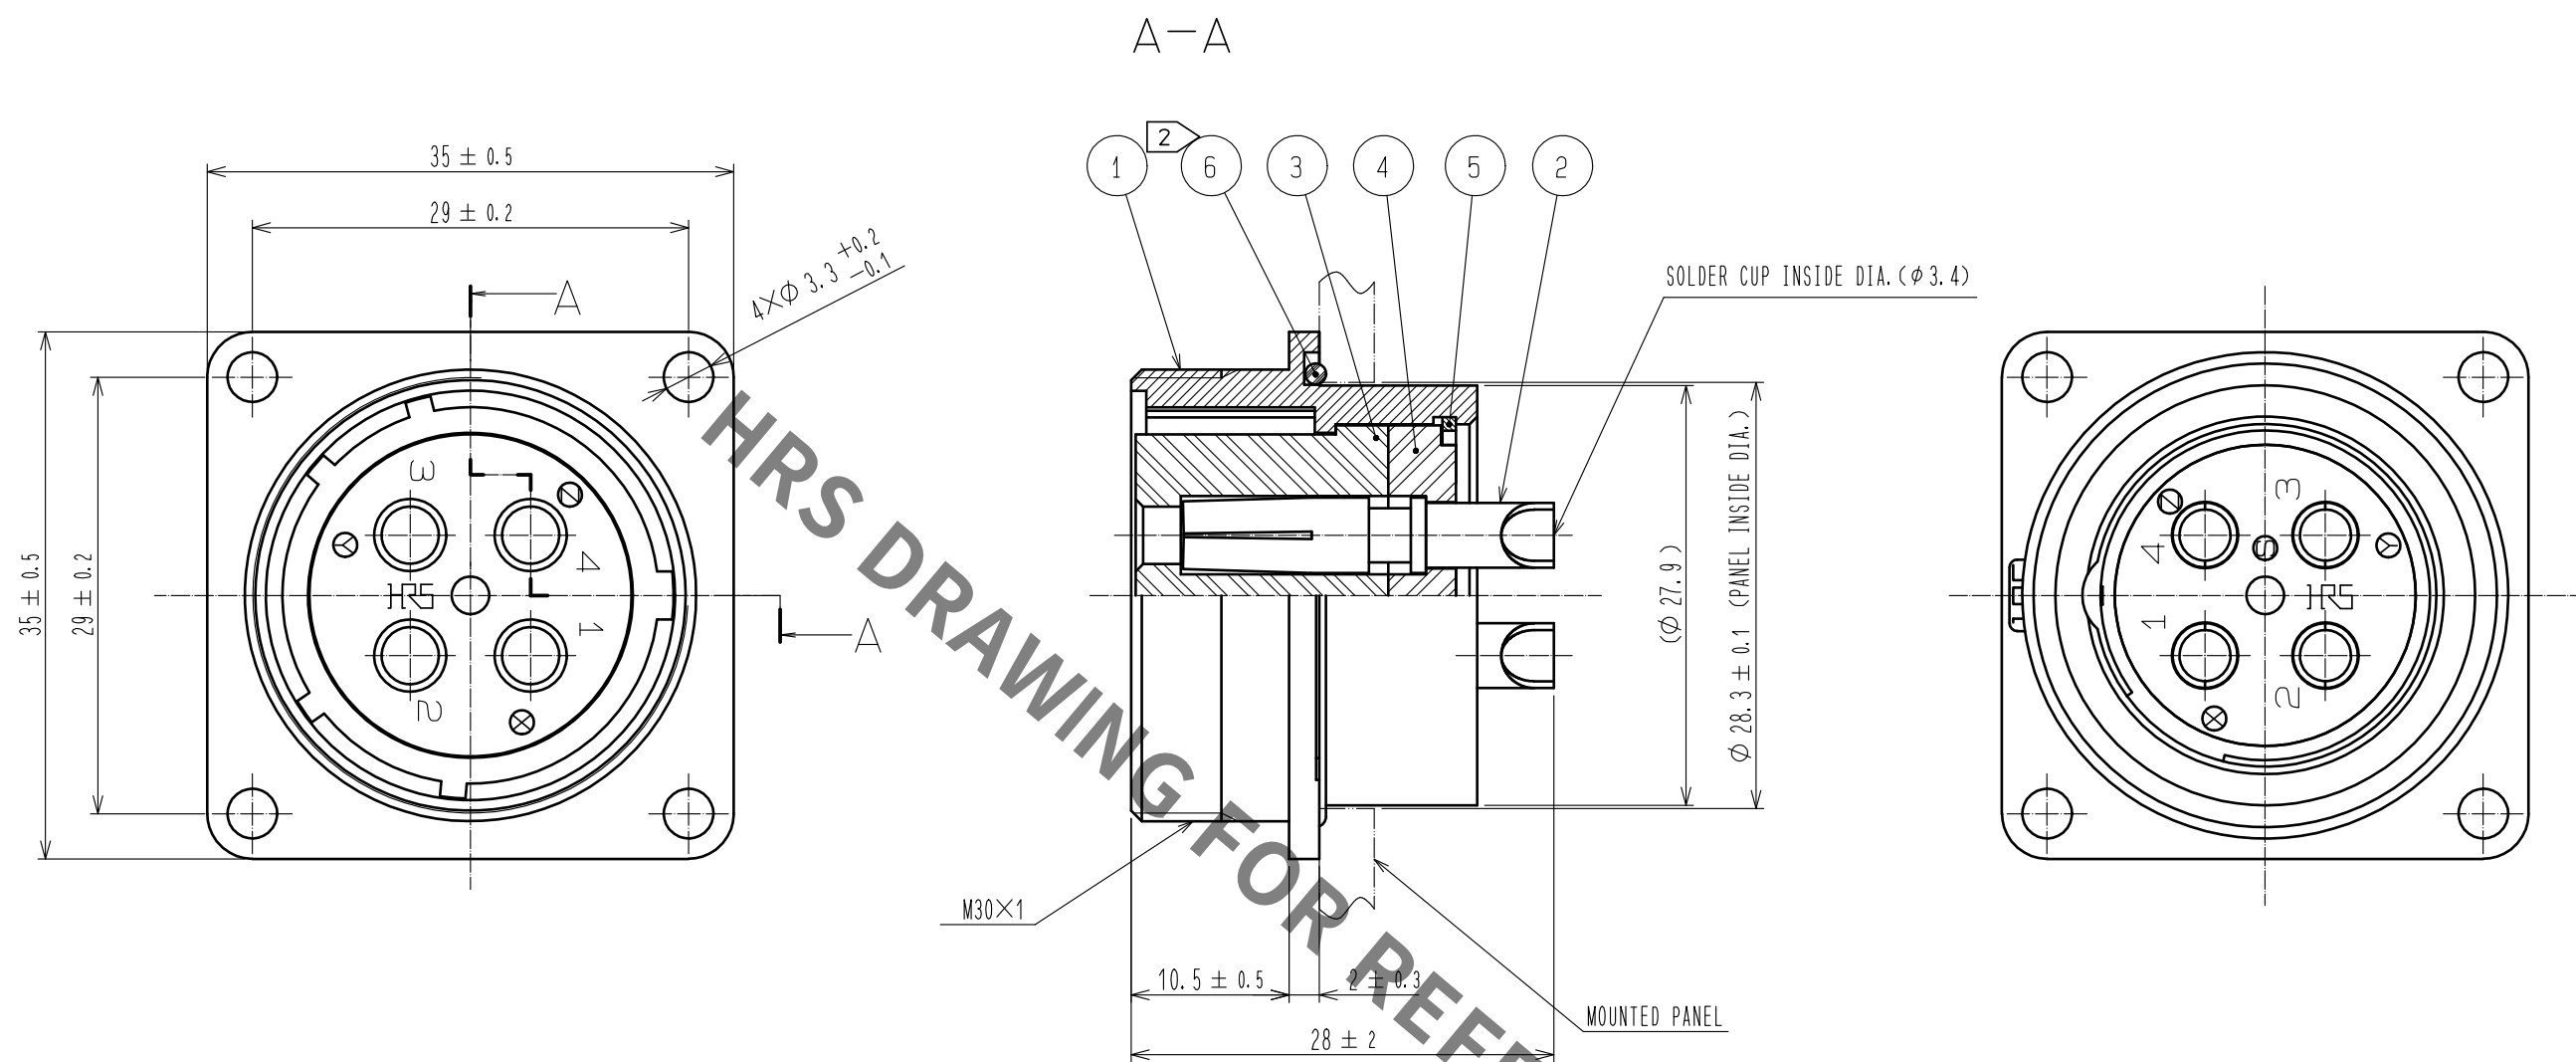


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTES 1 ONE EXAMPLE OF THE ROTATION THE SOLDER CUP OF REF.NO. ② IS SHOWN.
2 WHEN MOUNTED ON CHASSIS, BE CAREFUL THAT REF.NO. ⑥ IS FITTED INTO THE INDICATES GROOVE ANY BITING.

3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	6	SILICONE RUBBER	(BLACK)			
2	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	5	PHOSPHOR BRONZE	NICKEL PLATING			
1	ALUMINUM ALLOY	BLACK CHROME PLATING	4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00001480	DESIGNED HY. KISHI	CHECKED HY. KOBAYASHI	DATE 17. 03. 21
 HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI		15. 10. 21	DRAWING NO. EDC-118118-00-00		
		CHECKED	HY. KOBAYASHI		15. 10. 21	PART NO. JR25WRH-4S		
		DESIGNED	DS. MATSUNE		15. 10. 21	CODE NO. CL114-2186-2-00		
		DRAWN	DS. MATSUNE		15. 10. 21	  		