

22.15

1.90
TYP

32.4

28.9

22.95

1.35
TYP


2.95

2.15
TYP

4.05
TYP

GUIDE PIN

NOTCH DESIGNATES ROW A

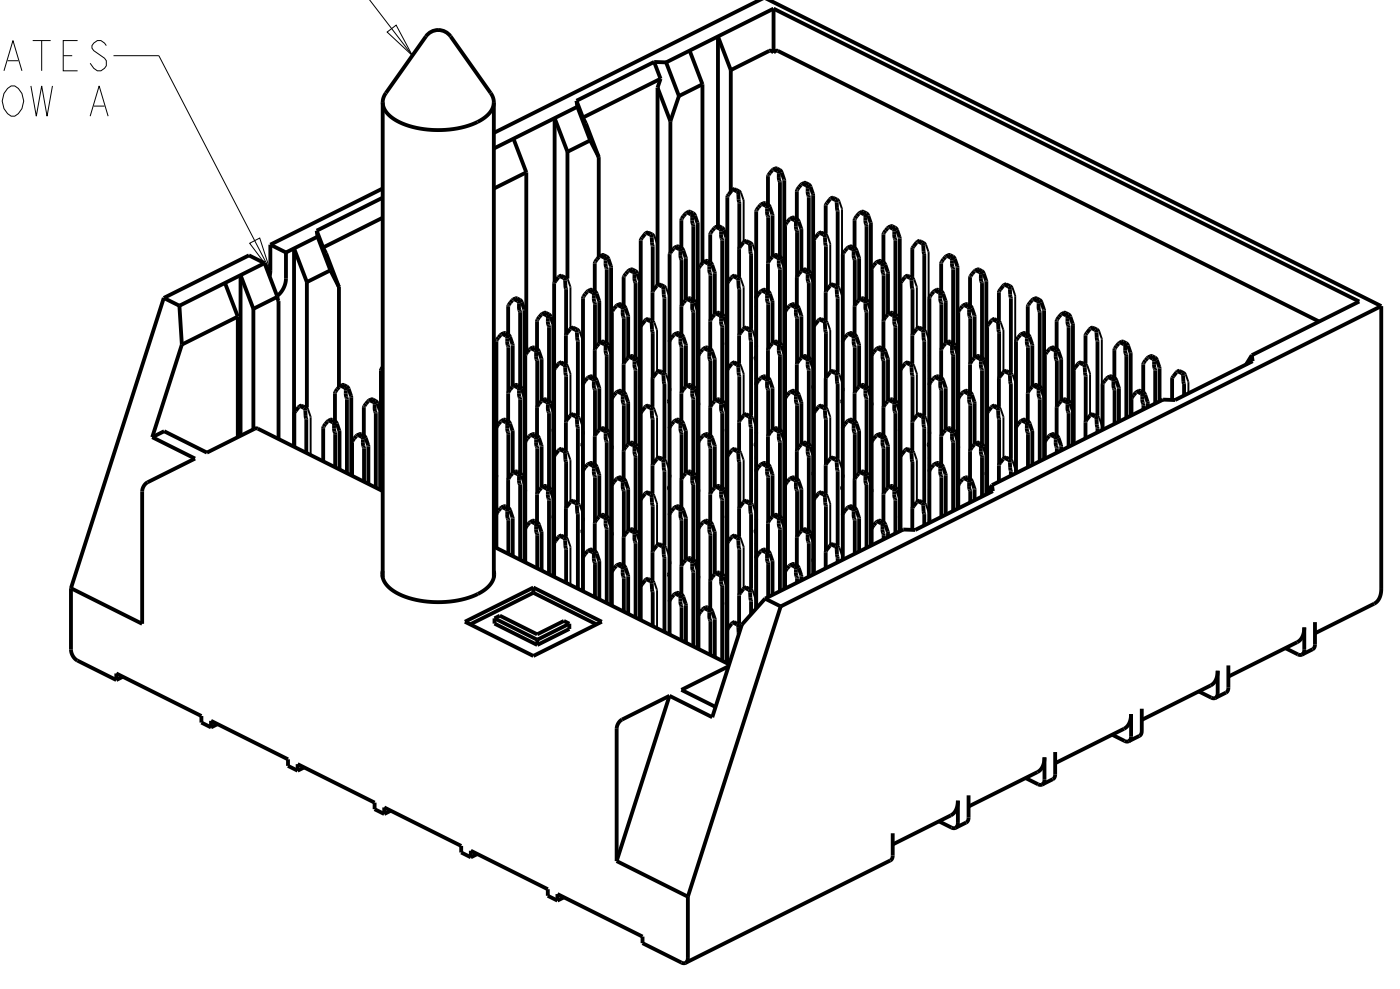

3.00 MIN BOARD THICKNESS

11.95

1.4

SECTION Z-Z

2.64

28.6

M±0.20

22.55

8.65

2.20

2.30

1.15

0.25

4.925

Ø 3.56±0.08

Ø 0.15

UNPLATED SCREW HOLE

2.30
TYP

1.15
TYP

Ø 0.39±0.08

Ø 0.10

PLATED THRU HOLES 18 PER COLUMN

ROW A

ROW B

ROW C

ROW D

ROW E

ROW F

ROW G

ROW H

ROW J

ROW K

ROW L

ROW M

ROW N

ROW P

ROW Q

ROW R

ROW S

ROW T

11.275

4.05
TYP

0.25

22.55

28.9

3.15

4.05
TYP

KEEP-OUT ZONE

PIN A1

DIFFERENTIAL PAIR REFERENCE

GROUND HOLE REFERENCE

LEFT GUIDED BACKPLANE HOLE PATTERN (CONNECTOR SIDE)
SCALE 4:1

2

2

FINISH

5.5

4.9

DIM M

2143266-2

2143266-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.25

2 PLC ±0.13

3 PLC ±

4 PLC ±

ANGLES ±0

FINISH

SEE TABLE

DRAWN J.K. SHOBER 13MAY2010

CHK J.EABY 13MAY2010

APVD J.EABY 13MAY2010

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME IMPACT, 6 PAIR, 12 COLUMN, LEFT GUIDED RIGHT END WALL ASSEMBLY, ORTHOGONAL, 0.39 PTH

SIZE A1

CAGE CODE 00779

DRAWING NO. C=2143266

RESTRICTED TO

SCALE 4:1

SHEET 1 OF 1

REV C

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN	APVD
C		REVISED PER ECO-14-013273	04NOV2014	AP	DD

1 MATERIAL:
HOUSING: LCP GLASS FILLED UL94V-0
TERMINALS: HIGH PERFORMANCE COPPER ALLOY

2 FINISH:
30µ" MIN GOLD IN CONTACT AREA
SELECTIVE TIN ON PCB TAILS.
NICKEL OVERALL.

3. SCREWS PACKAGED IN END OF PACKAGING TUBE

4805 (3/13)