


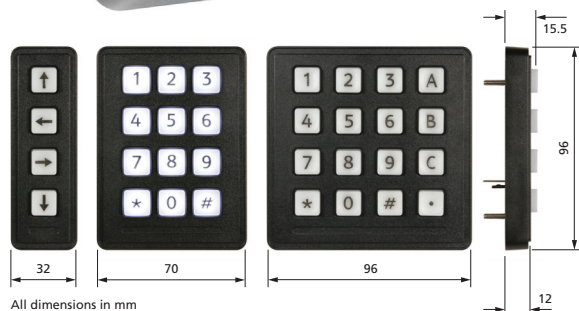

- IP65 – sealed for use in wet or dirty environments
- Impact, shock and vibration resistant to survive in demanding industrial applications
- High contrast laser marked keytop characters
- Available with integral, white light LED illumination (Storm 720TFX-i version)
- Raised 'home pip' to aid tactile navigation of the numeric keypads
- Keys are arranged on an X-Y matrix circuit terminated via a 0.1" pitch, square pin, male connector with an integral locking ramp
- Directly compatible with the Storm 450 and 450i USB keypad Interface

Tough, water resistant, industrial grade polymer keypads

These keypads feature moving, tactile keys with a responsive 'over-centre' action.

The keypads are designed for use in harsh industrial environments. High contrast white keytops are permanently laser engraved with black characters. These keypads are also available with integral white light LED illumination for use in dark or partially lit locations. Available in standard 4, 12 and 16 key formats.



Performance

Operational key life:

>2 million cycles per key



Environmental

Operational temperature:

-20°C to +60°C

Storage temperature:

-20°C to +70°C

Humidity:

5%RH to 95%RH non-condensing



Vibration and shock:

ETSI 300 019 5M3

Water and dust resistance:

IP65 When fitted to a suitable surface

Impact resistant:

5J

Electrical

Insulation resistance:

50Mohms (min)

Breakdown voltage:

500V a.c. (60 secs)

Max Operating voltage:

24V

Max Operating current:

50mA (excluding keypad illumination current)

Illumination:

5V +/- 10% at 13mA per key



Compliance

This device is designed to meet:

- EU RoHS
- EU Low Voltage Directive
- ESD: Up to +/- 15kV air discharge, +/- 7.5kV contact discharge
- WEEE Directive compliant



Additional Information

(downloads available at www.storm-interface.com)

- Installation instructions including product dimensions
- CAD files (dxf, dwg)
- Test data and reports

Accessories

- Storm 450 and 450i Series USB Interface
- USB Cable for use with USB Interface
- Replacement panel seals available at storm-interface.com



Part Numbers

720TFX

720TFX-i (illuminated)

	TFX	7203-04C020
	TFX-i	7203-04CW20
	TFX	7203-12T020
	TFX-i	7203-12TW20
	TFX	7203-16T020
	TFX-i	7203-16TW20

Accessories

Replacement rubber panel seal kits:		Storm 450 Series USB Interface	4500-00
4 Key	7200-SP040	Storm 450i USB Interface with audio control	4500-10
12 Key	7200-SP120	USB Cable (USB A to 90° USB mini-B)	4500-01
16 Key	7200-SP160		

For more information & to order:

www.storm-interface.com



Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.

Designed & produced by NIK Design nikdesign.co.uk

Storm Interface products include technology protected by international patents and design registration. All rights reserved.

Storm is a trademark of Keymat Technology Ltd
Storm Interface is a trading name of Keymat Technology Ltd



720TFX/720TFX-i Dec 2013



FM 39602