


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P2	REVISED PER ECO-11-004820	11MAR11	RK	HMR
	R	REVISED PER ECR-16-017870	20APR2017	BDA	MZ


D

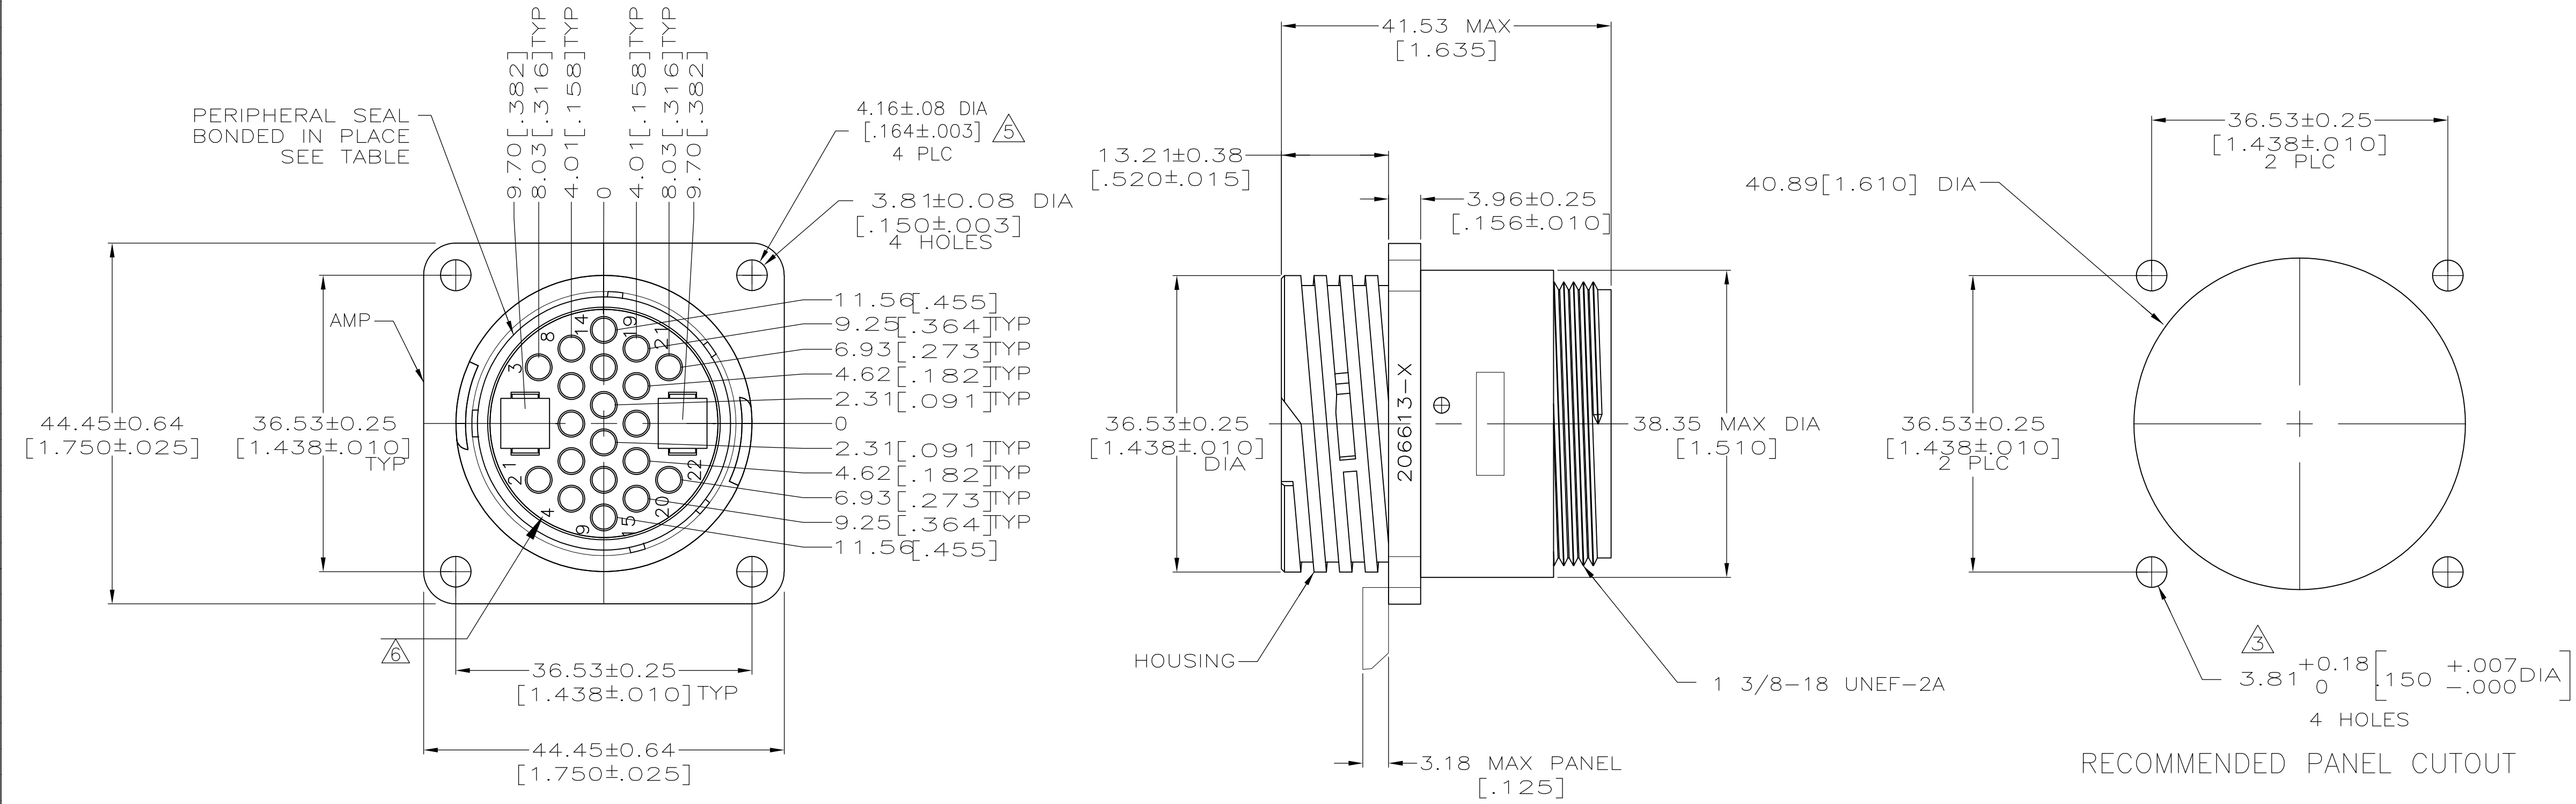

C

DETAIL A

B

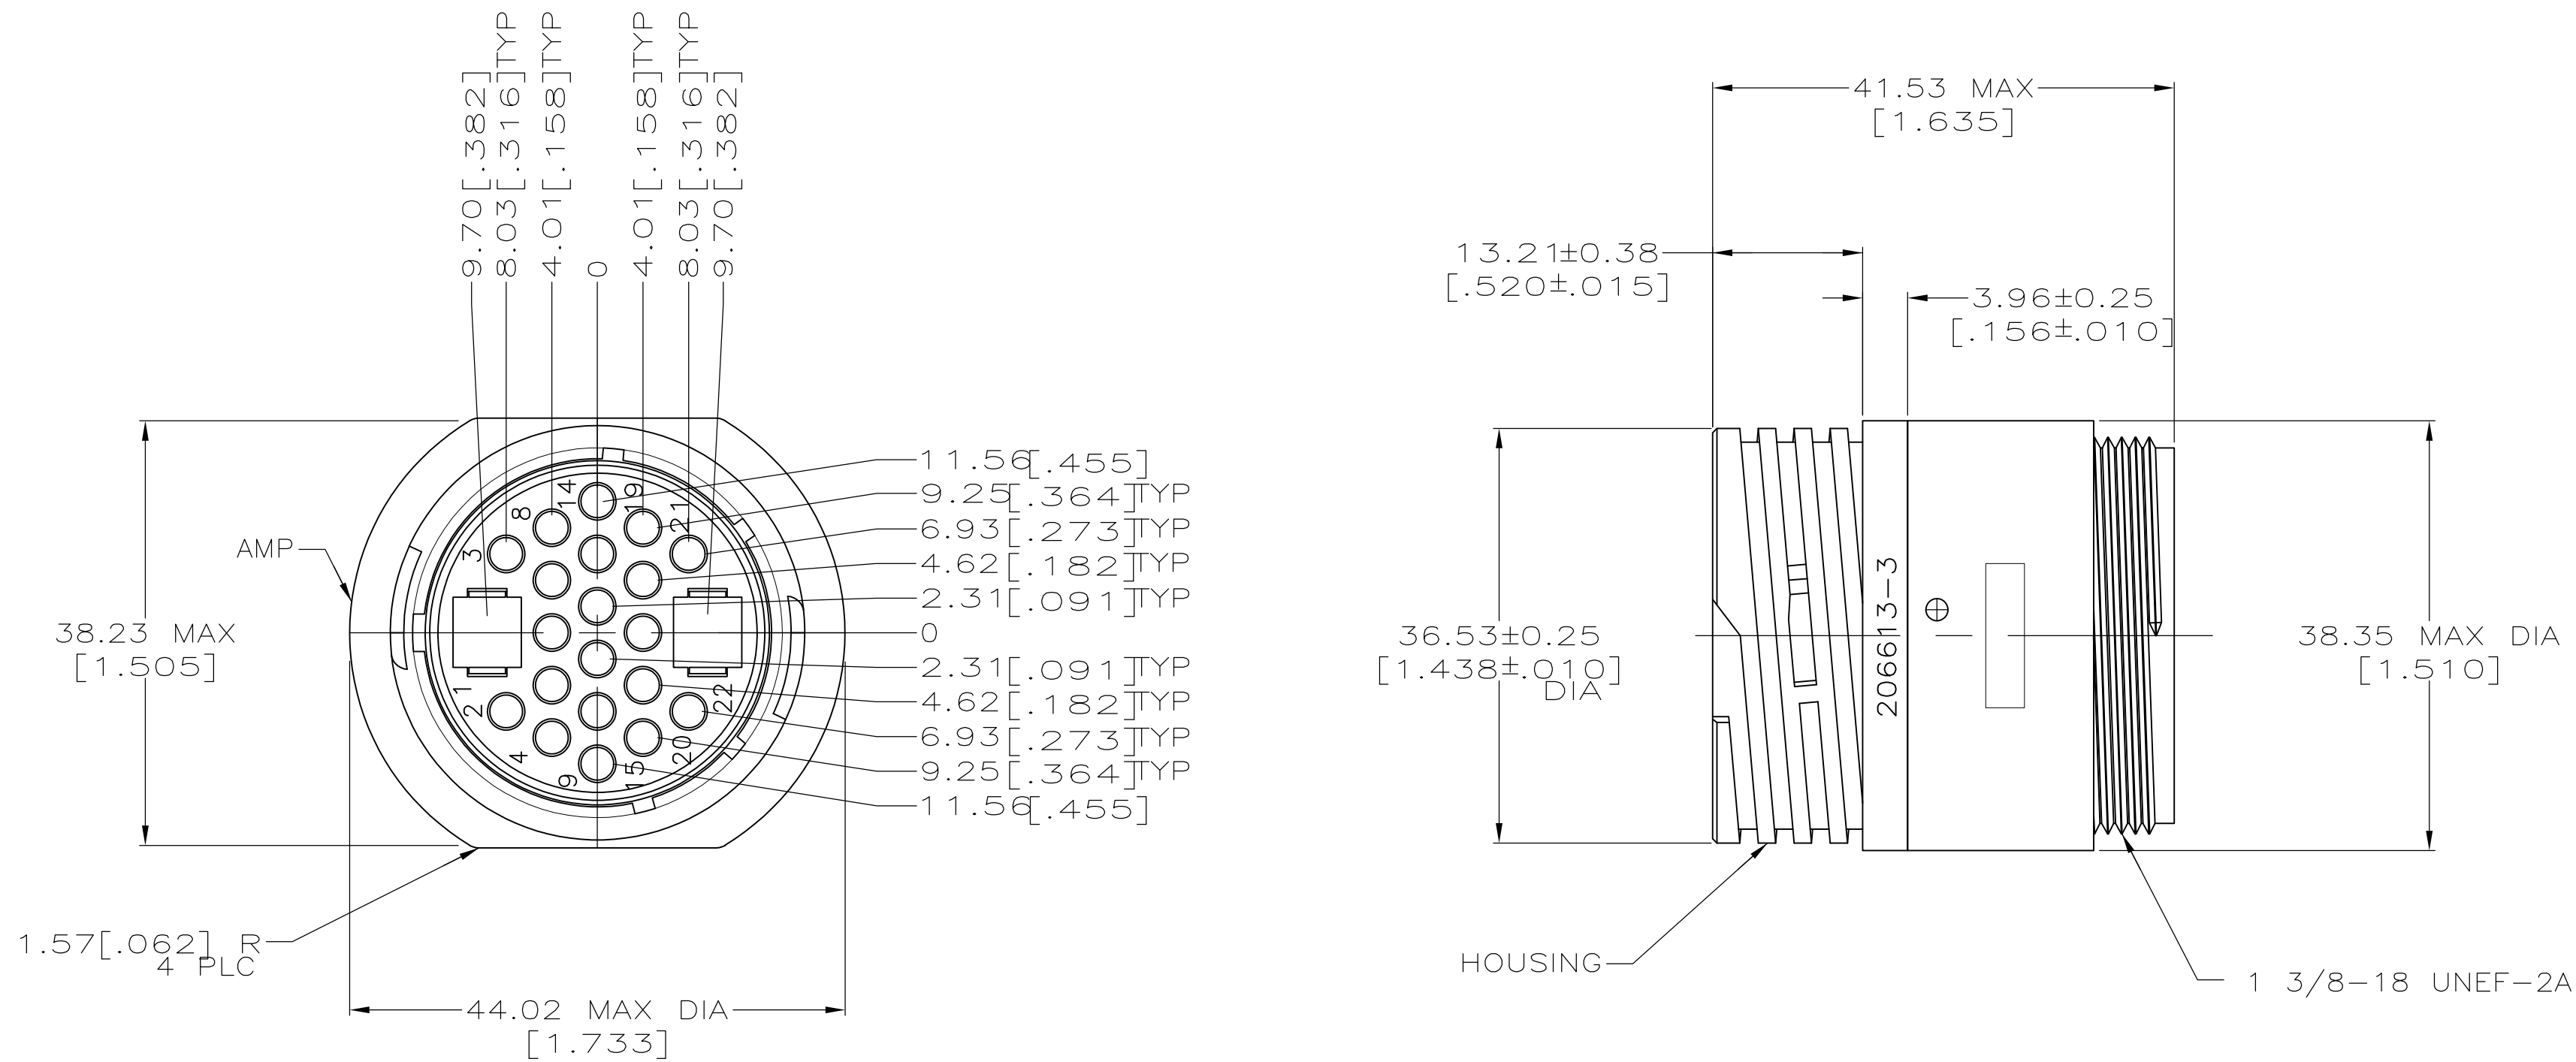

DETAIL B

- WILL ACCEPT (20) MULTIMATE AND 2 TYPE XII PIN CONTACTS.
- CAVITY IDENTIFICATION ON FRONT AND REAR FACE.

△ NUMBER 4 FASTENERS RECOMMENDED FOR MOUNTING.

△ HOUSING: NYLON, BLACK.
PERIPHERAL SEAL: ELASTOMER, GRAY.


△ APPLIES TO 206613-6 ONLY.

△ PERMANENT WHITE MARKED OR WHITE INK STAMPED CAVITY IDENTIFICATION.

△ HOUSING: NYLON, RED.
PERIPHERAL SEAL: ELASTOMER, GRAY.

△ WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

OBSOLETE	△△	-	YES	A	1-206613-2
OBSOLETE	△	-	YES	A	206613-9
PRELIMINARY	△△	-	YES	A	206613-7
OBSOLETE	△	4	NO	A	206613-6
	△	-	YES	A	206613-5
	△	-	NO	B	206613-3
	△	-	NO	A	206613-1
NOTES		THREADED INSERTS	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER 05/26/94	 TE Connectivity			
		CHK R. STONE 6-23-94				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	RECEPTACLE HOUSING, STANDARD SEX, SHELL SIZE 23, CPC		
	0 PLC	± -	PRODUCT SPEC	SIZE A1		
	1 PLC	± -	108-10024			
	2 PLC	± 0.13 [.005]	APPLICATION SPEC			
	3 PLC	± -				
	4 PLC	± -				
	ANGLES	± -	WEIGHT	DRAWING NO		
	FINISH	-		RESTRICTED TO		
MATERIAL				A1 00779 C=206613		
			CUSTOMER DRAWING			SCALE 2:1 SHEET 1 OF 1 REV R