
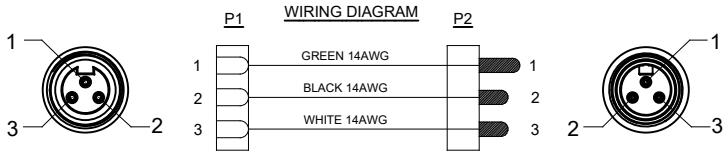


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	TECHNICAL DATA SHEET RELEASE	12-MAY-14	KMM	RFC

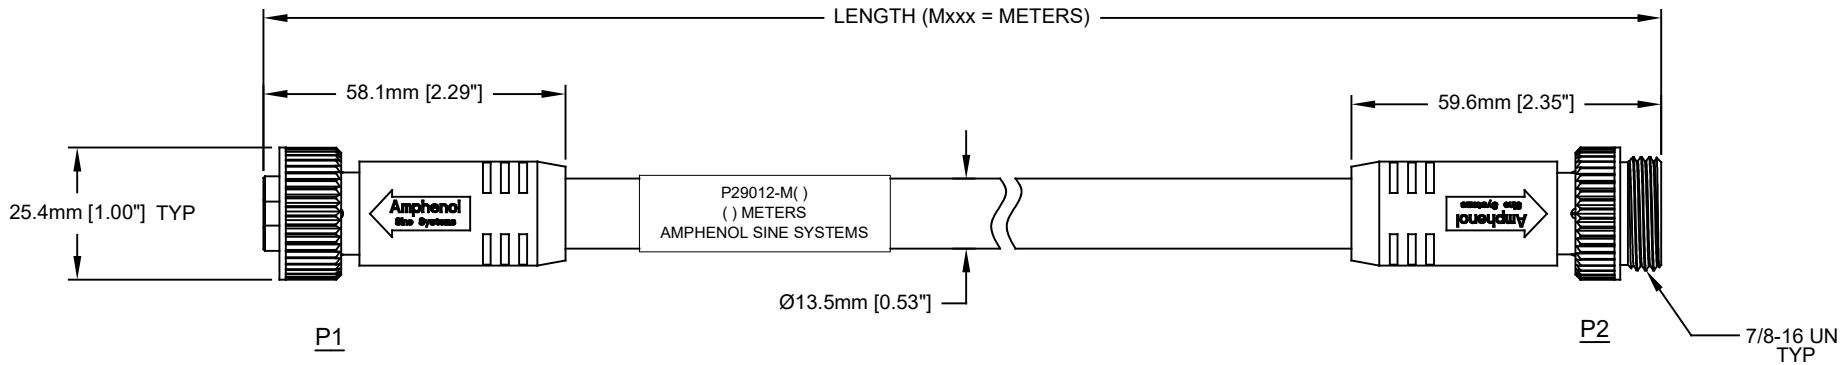

Amphenol P/N	MOLEX	TURCK
P29012-M*	113030A46M*	RSMRKM34-*M
P29012-M1	113030A46M010	RSMRKM34-010M
P29012-M2	113030A46M020	RSMRKM34-020M
P29012-M3	113030A46M030	RSMRKM34-030M
P29012-M5	113030A46M050	RSMRKM34-050M
P29012-M10	113030A46M100	RSMRKM34-100M

TOLERANCE	
0-2.99 M = +100.0/-25.0mm	0-9.99 FT = +4" / -1"
3-8.99 M = +150.0/-25.0mm	10.00-29.99 FT = +6" / -1"
9-14.99 M = +300.0/-25.0mm	30.00-49.99 FT = +12" / -1"
15-OVER M = +450.0/-25.0mm	50 FT-OVER = +18" / -1"

PART NUMBER		DESCRIPTION		ITEM
QUANTITY		MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED		SIGNATURES	DATE	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 M22 POWERBOSS LITE, 3 PIN, M/F, 14 AWG, TC-ER/STOOW, PVC JACKET
1) All dimensions are in metric (mm).		DRAWN: KMM	12-MAY-14	
2) Tolerances are as follows:		CHECKED: MRF	12-MAY-14	
1 PL DEC ±0.30 Fractions ±1/64		ENGINEER: KMM		
2 PL DEC ±0.15 Angles ±1°		APPROVAL: RFC	12-MAY-14	
3) Note reference =		CUSTOMER:		
MATERIAL SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		
PROCESS SPECIFICATIONS:		SIZE	TYPE	DWG NO.
NEXT ASSY:		C-	P29012-Mxxx	A1
		SCALE	FULL	C-P29012
		SHEET	1	OF 1

- TECHNICAL DATA:
- 1) MATERIALS:
- COUPLING NUT: MACHINED ALUMINUM, ANODIZED
 - INSULATION INSERT: THERMOPLASTIC, UL 94/V-0
 - CONTACT: GOLD FLASH PLATING OVER COPPER ALLOY
 - OVERMOLD MATERIAL: THERMOPLASTIC COLOR: BLACK
 - CABLE RATING: UL LISTED DUAL RATED TC-ER/STOOW, CSA TYPE STOOW, FT4 FLAME RATING, 600V, 90°C DRY & 75°C WET (TC-ER), 105°C (STOOW)
 - CABLE JACKET MATERIAL: PVC COLOR: BLACK
 - CONDUCTOR INSULATION: PVC
 - NUMBER OF CONDUCTORS: (3) 14AWG
- 2) ELECTRICAL DATA:
- CURRENT (MAX): 15A
 - VOLTAGE (MAX): 600V AC/DC
 - INSULATION RESISTANCE (MIN): 5000M OHMS
 - DIELECTRIC TEST VOLTAGE: 2200V
- 3) MECHANICAL DATA:
- TEMPERATURE RANGE: -40°C TO 90°C
 - PROTECTION: IP67 (MATED CONDITION)
 - MATING CYCLES: >500
 - VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
 - THERMAL SHOCK PER MIL-STD-202 METHOD 207
 - 48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101
- 4) RoHS COMPLIANT
- 5) UL 2237 LISTED ASSEMBLY
- UL FILE NUMBERS: E339703

TM-422 PB LITE, 3 PIN, M/F, 14AWG, TC-ER/STOOW, PVC JACKET
dwg no: C-P29012-Mxxx
rev: A1
shr: 1
of: 1