

Table with columns: PART NUMBER, REV, FIRST USED, POWER UNIT, FEED TYPE, DESCRIPTION. Rows include 1385507-1, 1385507-2, 1385507-3, 1385507-6, 7-1385507-7.

- RECOMMENDED SPARE PARTS.
GREASE LIGHTLY.
GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE.
LUBRICATE DAILY USING NO. 20 MACHINE OIL.
ITEMS WITH QTY OF REF SPECIFIED (EXCEPT ITEMS 78 AND 79) ARE USED ON ITEM 46.
THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.
APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY PN 1-23419-5 LOC-TITE TO THREADS.

PACKARD TERMINAL PACKARD CRIMP SPECS table with columns: AMP TERM PN, MFR TERM PN, CRIMP HEIGHT, WIRE SIZE, CRIMP, SIZE, TYPE, RANGE, WIRE, INSUL.

Main parts list table with columns: QTY, REF, PART NO, DESCRIPTION, ITEM NO.

Table with columns: REF, PART NO, DESCRIPTION, ITEM NO. List of components like NUT, HEX, PLATE, ADJUSTMENT, SHAFT, PIVOT, BUSHING, LEVER, INTERMEDIATE, BLOCK, PIVOT, SCREW, ADJ FEED ROD, PIN, CAM ROLLER, ROLLER, CAM, ROD, FEED, GUIDE, FEED ROD, CAP, RAM, HOUSING, PAWL, FEED, PIN, FEED FINGER, SPRING, FEED FINGER, HOLDER, FEED FINGER, LEVER, TERMINAL FEED ARM, BUMPER, HOLDDOWN, SPACER, TONKER, CAM, PRE-FEED 1 5/8 ST, CAM, PRE-FEED 1 1/8 ST, CAM, POST-FEED 1 5/8 ST, APPLICATOR, BASIC (SUBASSY), PLUG, NYLON, RAM, WASHER, LAMINATED, WASHER, RAM, BOLT, CRIMPER (5/16x1.00), BALL, STEEL, SPRING, COMPRESSION, DISC, INSULATION, WIRE DISC, PLASTIC, WASHER, SPRING, POST, RAM, SUPPORT, TERMINAL, PLATE, BASE, SCREW, ADJUSTMENT, BLOCK, STRIP GUIDE ADJ, PLATE, STRIP GUIDE, SPACER, FRONT SHEAR DEP, SPRING, DRAG, LEVER, DRAG RELEASE, DRAG, TERMINAL, GUIDE, STRIP (REAR), GUIDE, STRIP (FRONT), STRIPPER, SPRING, FEED RETURN, STRIPPER, HOLDER, SHEAR (NO CUT), GUARD, CHIP, FRONT, SPRING, SHEAR, STOP, SHEAR, HOLDER, SHEAR (FRONT), SHEAR, FLOAT (FRONT), ANVIL, SPACER, DEPRESSOR (REAR), DEPRESSOR, SHEAR (FRONT), SPACER, BLOCK CRIMPER, CRIMPER, INSULATION, SPACER, CRIMPER, CRIMPER, WIRE, CRIMPER, WIRE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

20



RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC A DIST 66


DIMENSIONS IN INCHES. DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED. 2 PLC DEC ± .0005 3 PLC DEC ± .001 4 PLC DEC ± .0015

Table with columns: MATL, HT TR, FIN, DR, B.HIGMAN, C.HK, NAME, MACHINE REF, MINI APPL, SCALE, DWG NO, SHEET, REV.

REVISION RECORD table with columns: P/F, LTR, REVISION, DATE, APP.

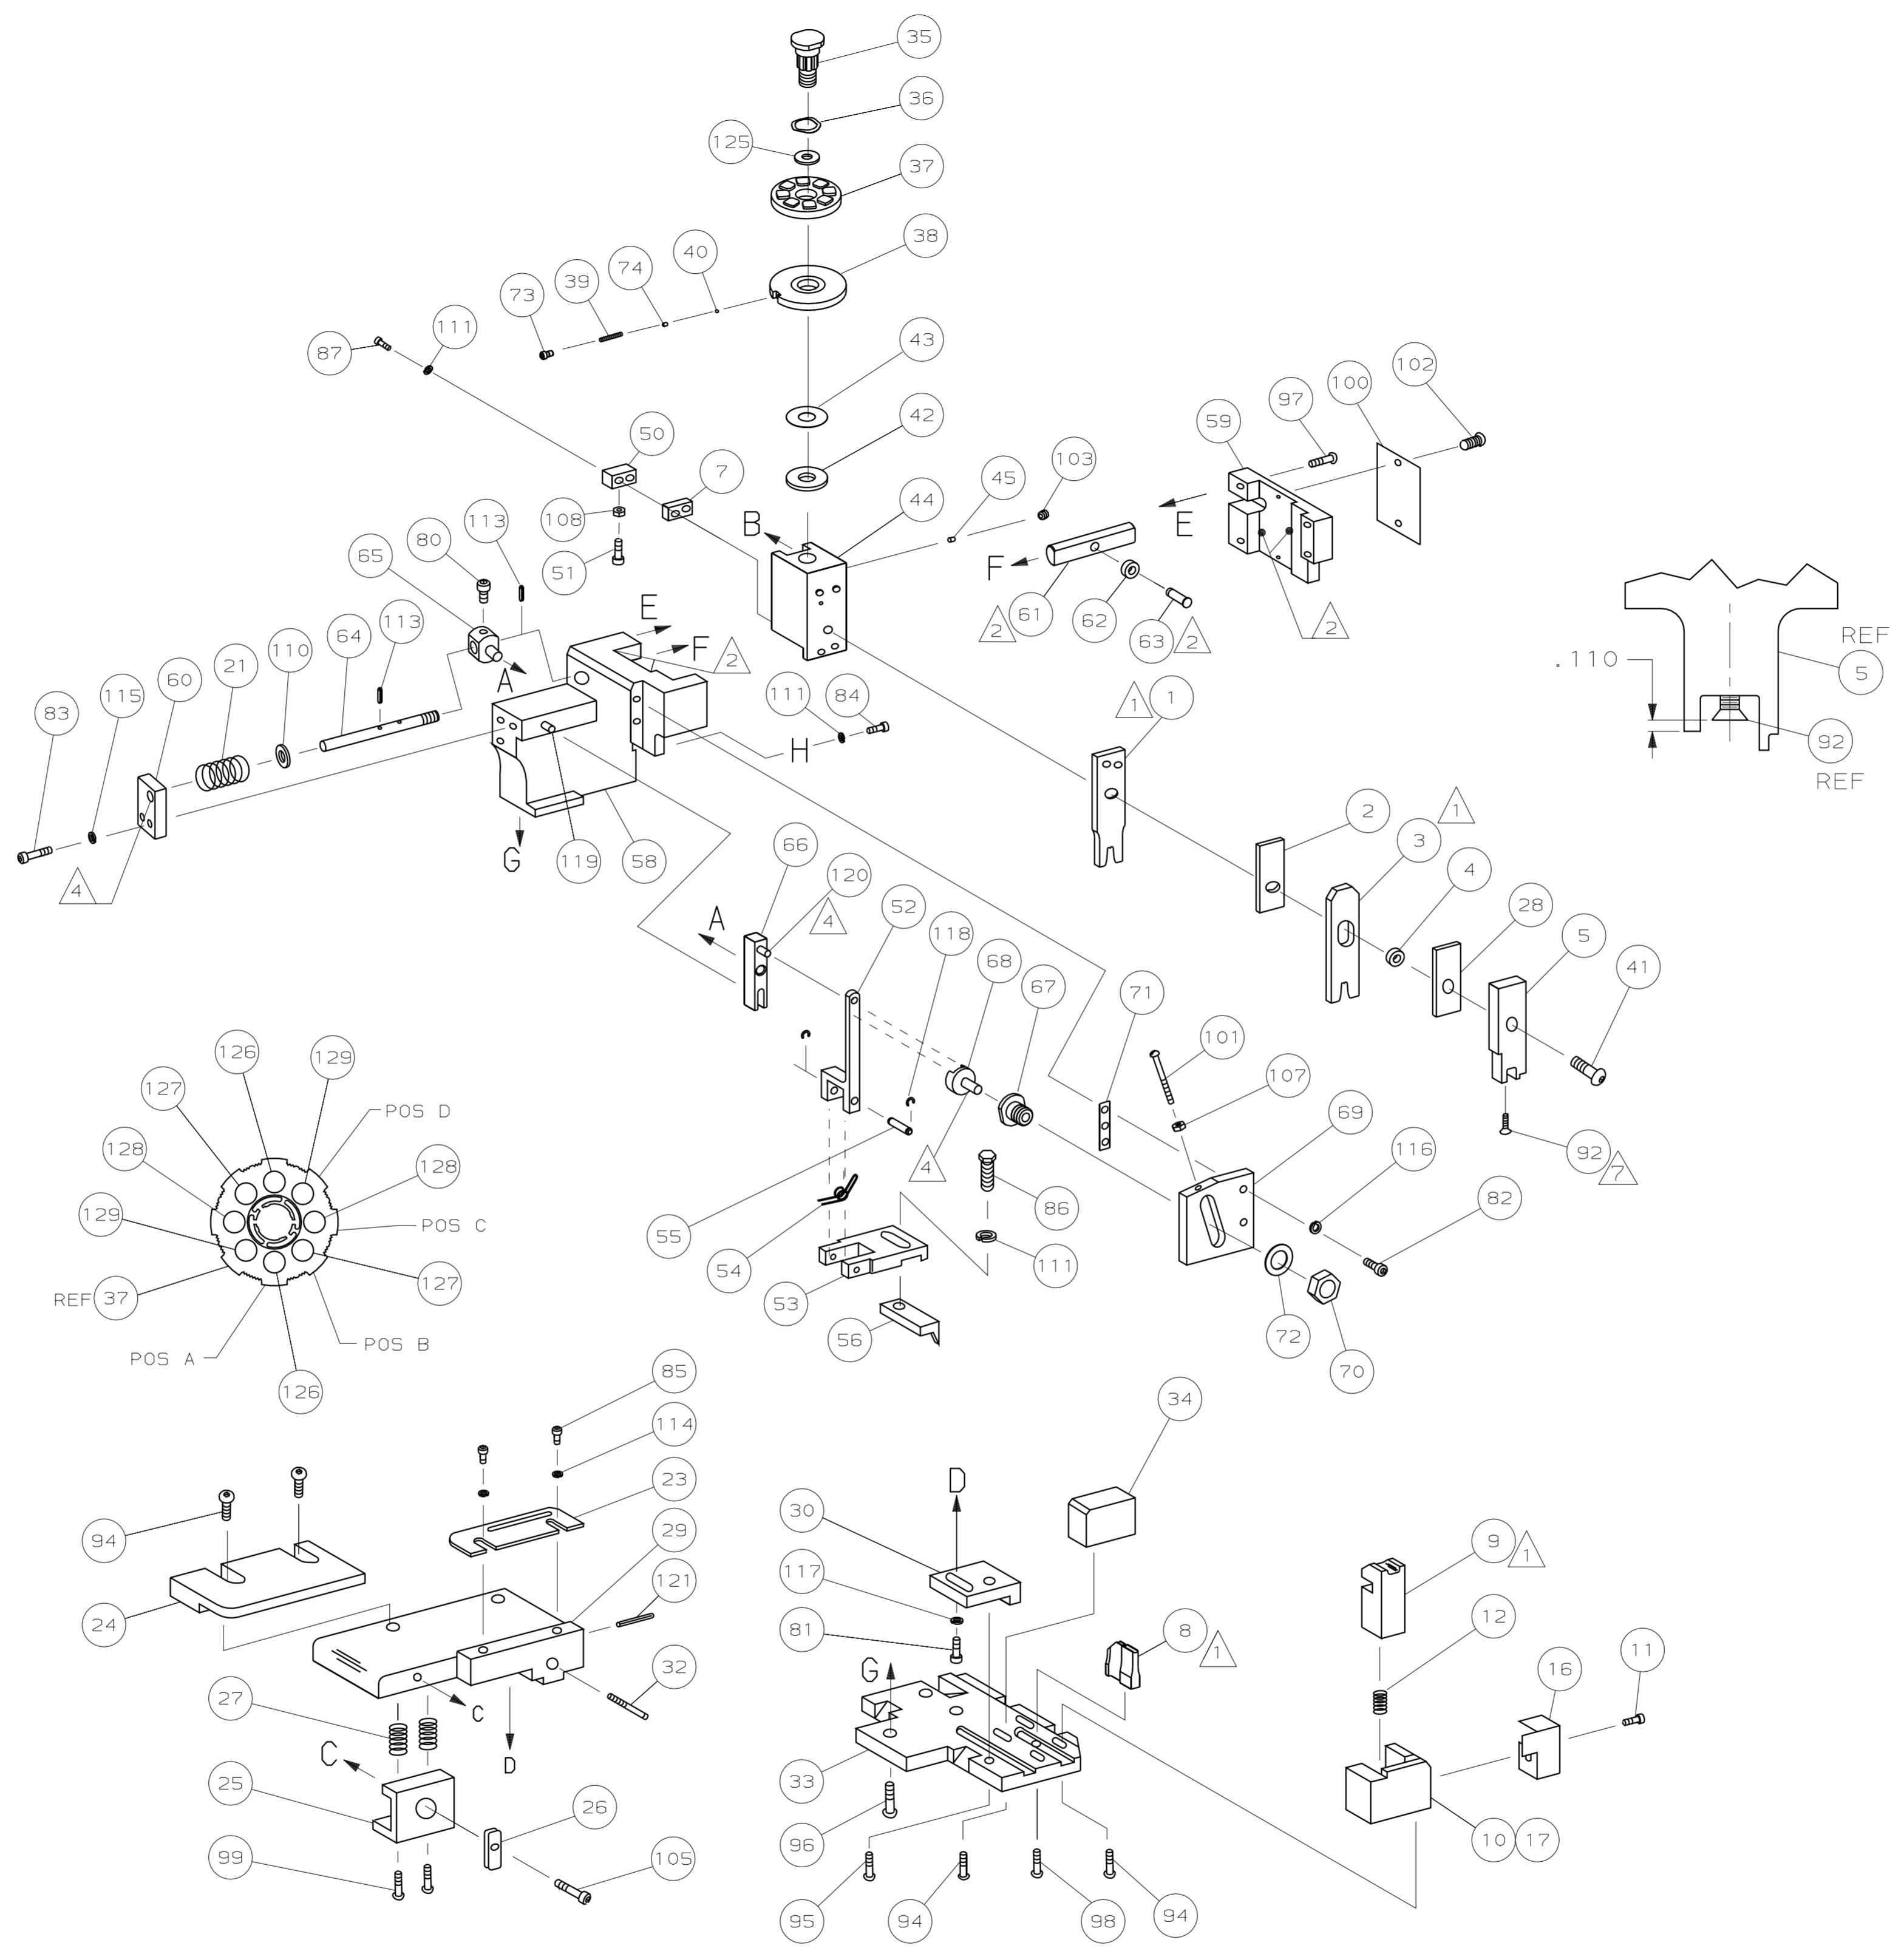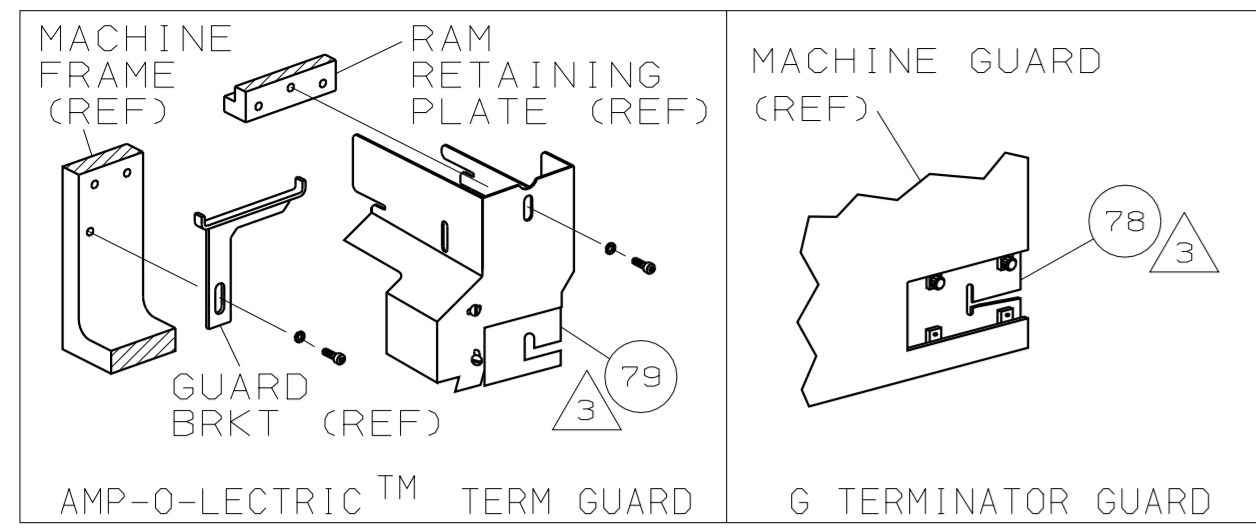

POST FEED 1 5/8 STROKE	PRE FEED 1 1/8 STROKE	PRE FEED 1 5/8 STROKE
ROTATED 180° B	ROTATED 180° B	ROTATED 180° B
LEADMAKER	K TERMINATOR	G TERMINATOR

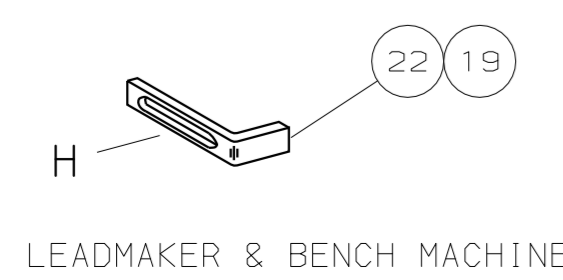

DWG SIZE	PART NO	DESCRIPTION	ITEM NO
REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)			
QTY REQD PER ASSY		PARTS LIST	
MATL	HT TR	FIN	
DIMENSIONS IN INCHES. DO NOT SCALE PRINT.			
TOLERANCES UNLESS OTHERWISE SPECIFIED:			
DR	20DEC06	APP	21DEC06
R.O.WILSON		T.BENCHOFF	
2 PLC DEC ±			
3 PLC DEC ±			
4 PLC DEC ±			
ANGLES ±			
SURF TEXTURE:			
REMOVE BURRS, BREAK SHARP EDGES R.015 MAX			
SCALE	DWG NO	1385507	SHEET 2 OF 2
			REV B1

SEE SHEET 1
REVISION RECORD
APP DATE

THIS DRAWING IS A CONTROLLED DOCUMENT.

.20

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP 1756 REV 3-92
LOC A
DIST 66
AMP 1756 REV 3-92

1385507

D

C

B

A