



		1	
Part Number:		DRAWN	2/10/2017
CMAC	11100 1	CJ	3/10/2017
50020	01108-1	CHECKED	10/6/2017
		P.D.	10/0/2017
Description:	D	APPROVED	10/6/2017
vvaterproof i	Dynamic Speaker	C.E.	10/6/2017

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Top View

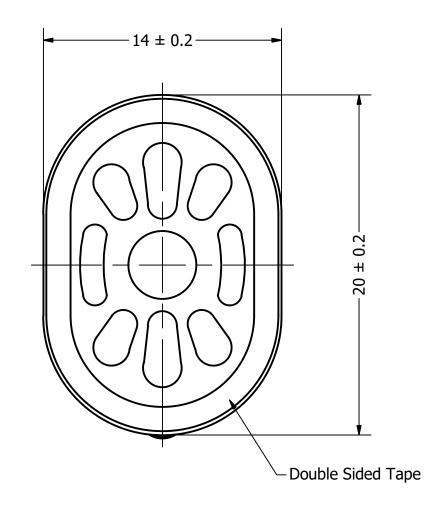

Side View

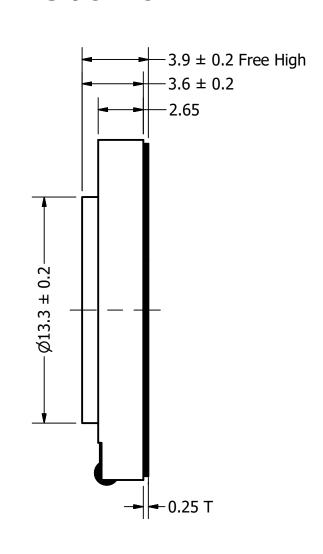

Bottom View

Date Code Marking —— "17 C" 17=2017, C=Mar.	MAX 3mm WAX 0.3mm
	MAX 0

Items	Specifications	Conditions					
Sound Pressure Level	97	dB (@ 10cm), Avg.					
Resonant Frequency	1,100	Hz					
Frequency Range	1,100 ~ 10,000	Hz					
Nominal Power	0.8	W	REVISION HISTORY				
Max. Power	1.2	W	REV	DESCRIPTION	DATE	APPROVED	
Impedance	8	Ω		Released from Engineering	10/6/2017	C.E.	
Cone Material	Mylar		NOTES				
Mount Type	Flush Mount		1) All dimensions are in mm unless otherwise noted				
IP Rating	IP67		2) All tolerances are ± 0.3 mm unless otherwise noted				
Storage Temperature	-40 ~ +85	°C	3) All parts meet RoHS				
Operating Temperature	-20 ~ +60	°C	4) Subject to change or redrawn without notice				
Weight	1.84	g					