



PD85006-E

RF power transistor, LdmoST plastic family N-channel enhancement-mode lateral MOSFETs

Features

- Excellent thermal stability
- Common source configuration
- Broadband performances:
 $P_{OUT} = 6\text{ W}$ with 15 dB gain @ 870 MHz/13.6 V
- Plastic package
- ESD protection
- In compliance with the 2002/95/EC european directive

Description

The PD85006-E is a common source N-channel, enhancement-mode lateral field-effect RF power transistor. It is designed for high gain, broadband commercial and industrial applications. It operates at 13.6 V in common source mode at frequencies of up to 1 GHz. PD85006-E boasts the excellent gain, linearity and reliability of ST's latest LDMOS technology mounted in the first true SMD plastic RF power package.

PowerSO-10RF's superior linearity performance makes it an ideal solution for mobile radio applications.

The PowerSO-10 plastic package, designed to offer high reliability, is the first ST JEDEC approved, high power SMD package. It has been specially optimized for RF needs and offers excellent RF performance and ease of assembly. Mounting recommendations are available in www.st.com/rf (search for AN1294).

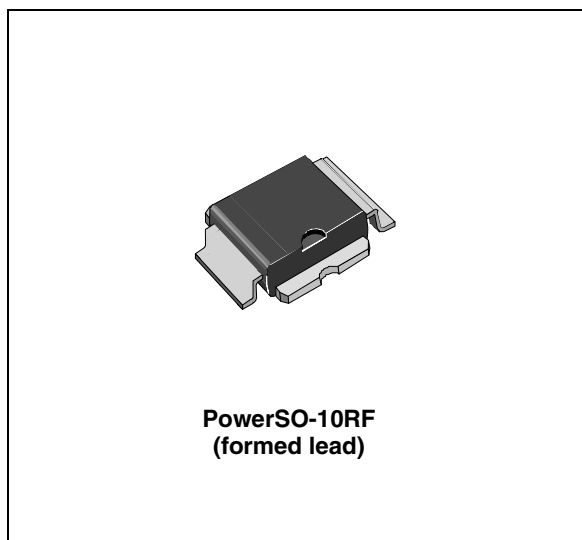


Figure 1. Pin connections

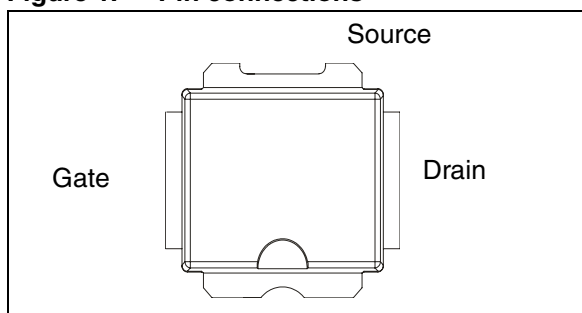


Table 1. Device summary

Order codes	Packages	Packaging
PD85006-E	PowerSO-10RF (formed lead)	Tube
PD85006TR-E	PowerSO-10RF (formed lead)	Tape and reel

Contents

1 Electrical data 3

 1.1 Maximum ratings 3

 1.2 Thermal data 3

2 Electrical characteristics 4

 2.1 Static 4

 2.2 Dynamic 4

 2.3 ESD protection characteristics 4

3 Impedances 5

4 DC curves 6

5 RF curves 8

6 Schematic and bill of material 10

7 Package mechanical data 12

8 Revision history 16



1 Electrical data

1.1 Maximum ratings

Table 2. Absolute maximum ratings ($T_{CASE} = 25\text{ °C}$)

Symbol	Parameter	Value	Unit
$V_{(BR)DSS}$	Drain-source voltage	40	V
V_{GS}	Gate-source voltage	-0.5 to +15	V
I_D	Drain current	2	A
P_{DISS}	Power dissipation (@ $T_C = 70\text{ °C}$)	36.5	W
T_J	Max. operating junction temperature	165	°C
T_{STG}	Storage temperature	-65 to +150	°C

1.2 Thermal data

Table 3. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Junction - case thermal resistance	2.6	°C/W

2 Electrical characteristics

$T_{\text{CASE}} = +25\text{ }^{\circ}\text{C}$

2.1 Static

Table 4. Static

Symbol	Test conditions		Min	Typ	Max	Unit
I_{DSS}	$V_{\text{GS}} = 0\text{ V}$	$V_{\text{DS}} = 25\text{ V}$	-		1	μA
I_{GSS}	$V_{\text{GS}} = 5\text{ V}$	$V_{\text{DS}} = 0\text{ V}$			1	μA
$V_{\text{GS(Q)}}$	$V_{\text{DS}} = 13.6\text{ V}$	$I_{\text{D}} = 200\text{ mA}$		4		V
$V_{\text{DS(ON)}}$	$V_{\text{GS}} = 10\text{ V}$	$I_{\text{D}} = 0.25\text{ A}$		0.27		V
C_{ISS}	$V_{\text{GS}} = 0\text{ V}$	$V_{\text{DS}} = 13.6\text{ V}$		16		pF
C_{OSS}	$V_{\text{GS}} = 0\text{ V}$	$V_{\text{DS}} = 13.6\text{ V}$		14		pF
C_{RSS}	$V_{\text{GS}} = 0\text{ V}$	$V_{\text{DS}} = 13.6\text{ V}$		1.1		pF

2.2 Dynamic

Table 5. Dynamic

Symbol	Test conditions	Min	Typ	Max	Unit
P_{OUT}	$V_{\text{DD}} = 13.6\text{ V}$, $I_{\text{DQ}} = 200\text{ mA}$, $P_{\text{IN}} = 0.1\text{ W}$, $f = 870\text{ MHz}$	5	6	-	W
G_{P}	$V_{\text{DD}} = 13.6\text{ V}$, $I_{\text{DQ}} = 200\text{ mA}$, $P_{\text{OUT}} = 5\text{ W}$, $f = 870\text{ MHz}$	15	17		dB
h_{D}	$V_{\text{DD}} = 13.6\text{ V}$, $I_{\text{DQ}} = 200\text{ mA}$, $P_{\text{OUT}} = 5\text{ W}$, $f = 870\text{ MHz}$	55	63		%
Load mismatch	$V_{\text{DD}} = 13.6\text{ V}$, $I_{\text{DQ}} = 200\text{ mA}$, $P_{\text{OUT}} = 5\text{ W}$, $f = 870\text{ MHz}$ All phase angles	20:1			VSWR

2.3 ESD protection characteristics

Table 6. ESD protection characteristics

Test conditions	Class
Human body model	2
Machine model	M3

3 Impedances

Figure 2. Impedances

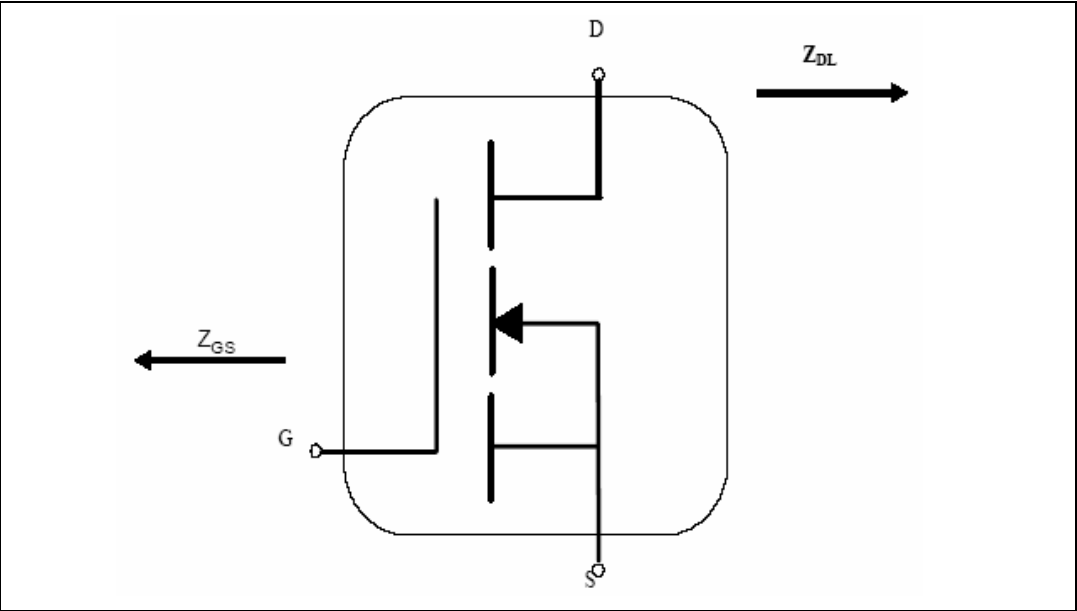


Table 7. Broadband impedances

F(MHz)	Z_{GS}	Z_{DL}
860	2.66+ j 4.28	6.23+ j 5.71
880	2.81+ j 4.35	6.46+ j 6.20
900	2.88+ j 4.34	6.73 + j 6.66
920	2.87+ j 4.25	7.06+ j 7.06
940	2.68+ j 4.20	7.40+ j 7.45
960	2.39+ j 4.20	7.80+ j 7.75

4 DC curves

Figure 3. Output power and efficiency vs. frequency
13.6 V / 200 mA / Pin = 21 dBm

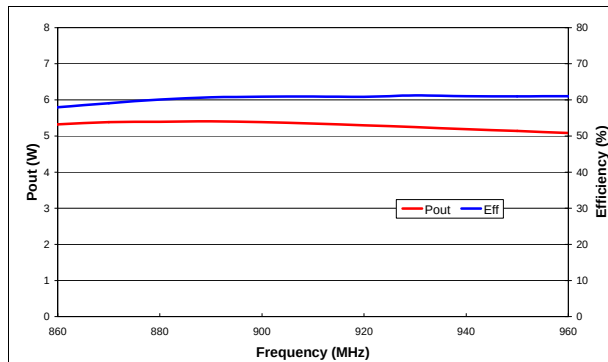


Figure 4. Gain vs. frequency 13.6 V / 200 mA

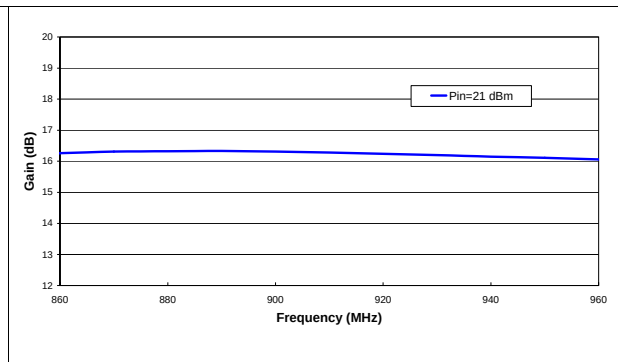


Figure 5. Input return loss vs. frequency
13.6 V / 200 mA

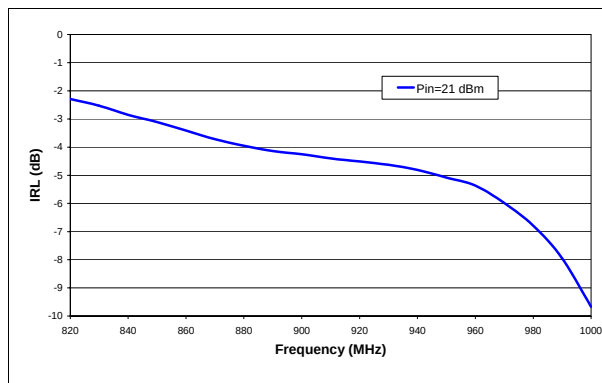


Figure 6. Gain vs. pout 13.6 V / 200 mA

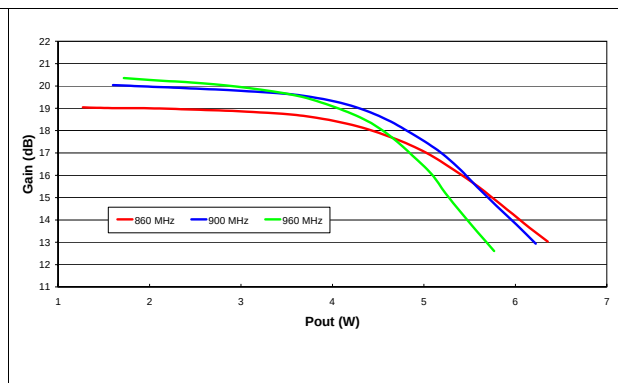


Figure 7. Id vs. pin 13.6 V / 200 mA

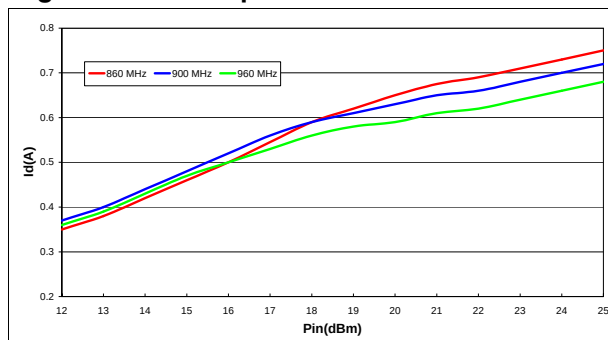


Figure 8. Pout vs. pin 13.6 V / 200 mA

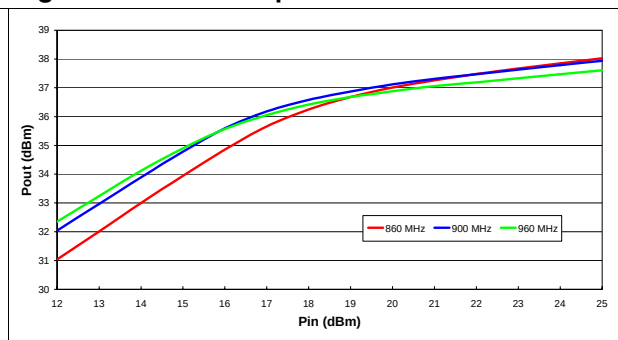


Figure 9. DC output characteristics

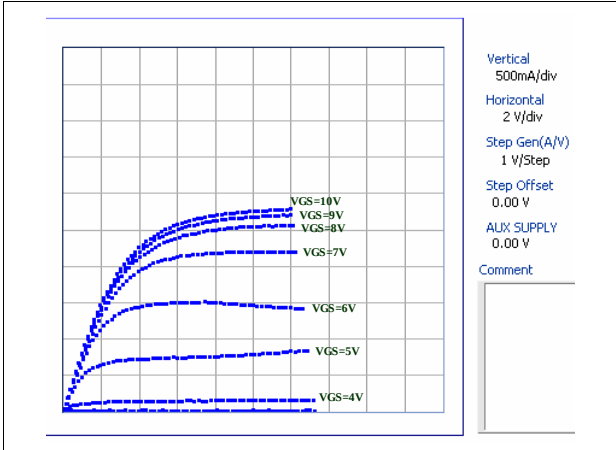


Figure 10. I_D vs. V_{GS}


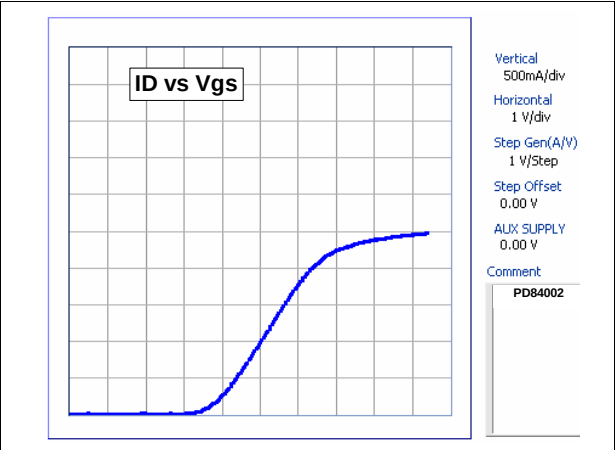


Figure 11. Capacitances vs. drain voltage

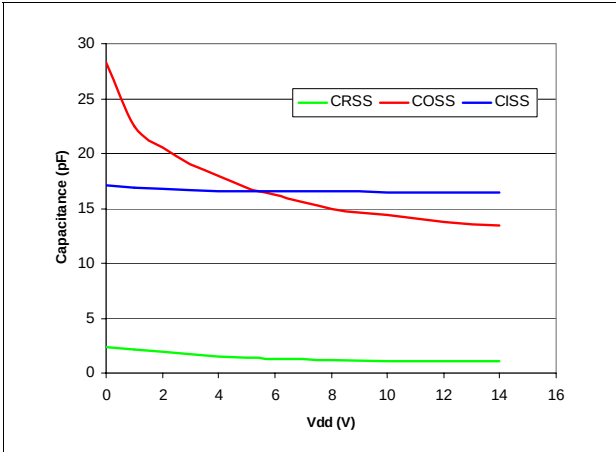

5 RF curves

Figure 12. Output power and efficiency vs. frequency
13.6 V / 200 mA / Pin = 21 dBm

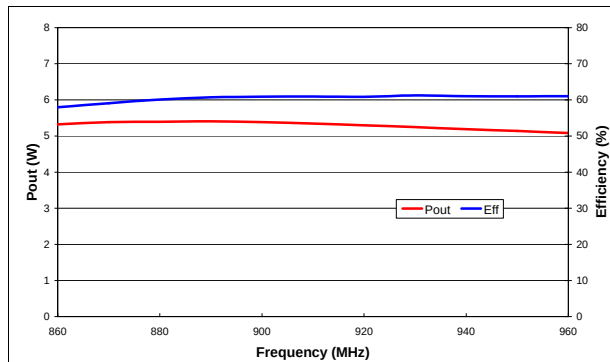


Figure 13. Gain vs. frequency 13.6 V / 200 mA

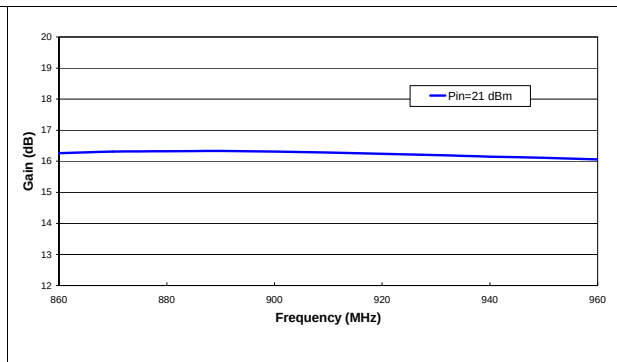


Figure 14. Input return loss vs. frequency
13.6 V / 200 mA

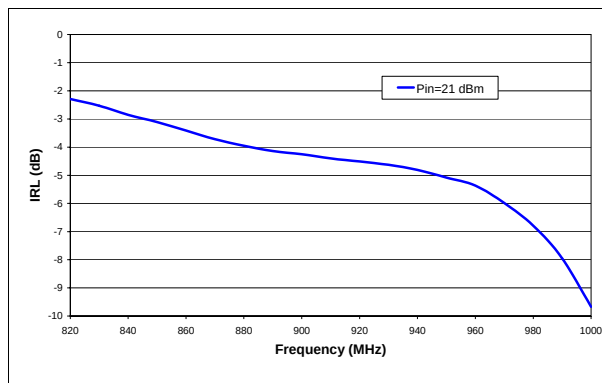


Figure 15. Gain vs. pout 13.6 V / 200 mA

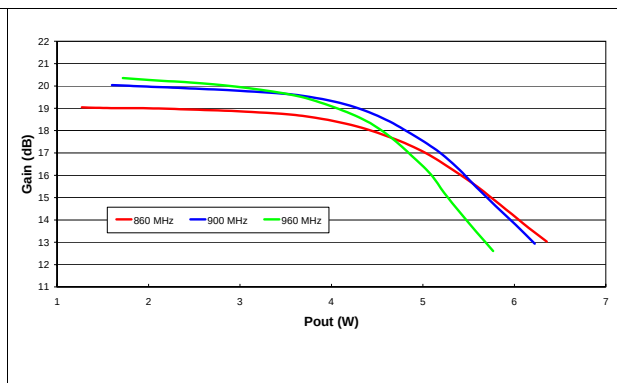


Figure 16. Id vs. pin 13.6 V / 200 mA

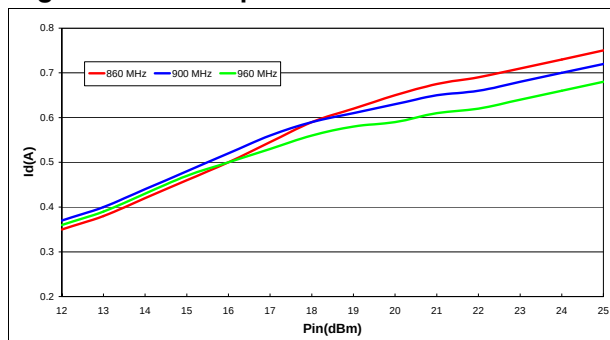


Figure 17. Pout vs. pin 13.6 V / 200 mA


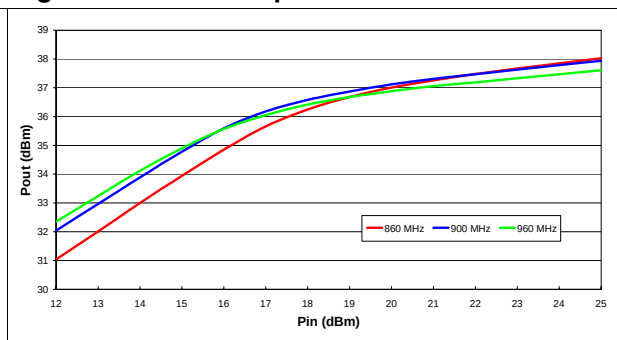


Figure 18. Harmonics vs. frequency
13.6 V / 200 mA

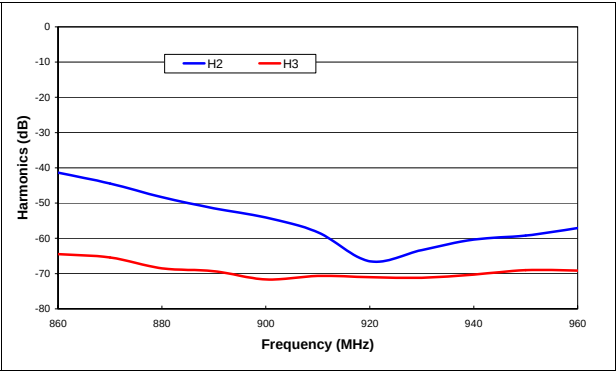

6 Schematic and bill of material

Figure 19. Schematic and bill of material

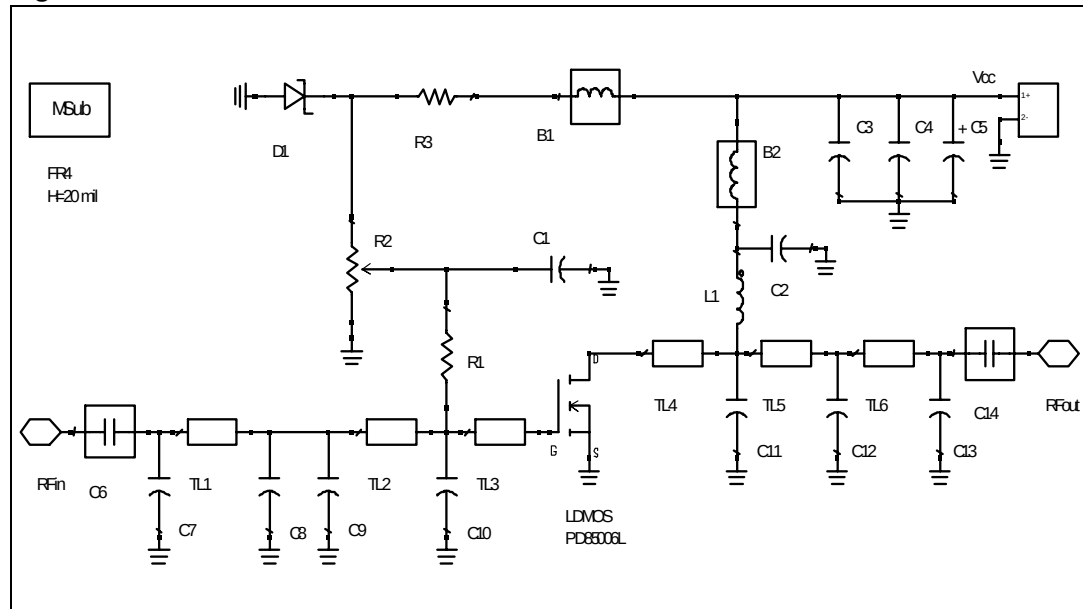


Table 8. Components part list

Component ID	Description	Value	Case size	Manufacturer	Part code
B1	Ferrite Bead			Panasonic	EXCELDRC35C
B2	Ferrite Bead			Panasonic	EXCELDRC35C
C1, C2	Capacitor	120 pF	0603	Murata	GRM39-C0G121J50D500
C3	Capacitor	1 nF	0603	Murata	GRM39-X7R102K50C560
C4	Capacitor	10 nF	0603	Murata	GRM39-X7R103K50C560
C5	Capacitor	10 μ F	SMT	Panasonic	EEVHB1V100P
C6, C14	Capacitor	39 pF	0603	Murata	GRM39-C0G390J50D500
C7	Capacitor	3.3 pF	0603	Murata	GRM39-C0G3R3C50Z500
C8	Capacitor	2.7 pF	0603	Murata	GRM39-C0G2R7C50Z500
C9	Capacitor	12 pF	0603	Murata	GRM39-C0G120J50D500
C10	Capacitor	22 pF	0603	Murata	GRM39-C0G220J50D500
C11	Capacitor	8.2 pF	0603	Murata	GRM39-C0G8R2D50Z500
C12	Capacitor	6,8 pF	0603	Murata	GRM39-C0G6R8D50Z500
C13	Capacitor	3.9 pF	0603	Murata	GRM39-C0G3R9C50Z500
D1	Zener Diode	5.1 V	SOD110	Philips	BZX284C5V1
L1	Inductor	12.55 nH		Coilcraft	1606-10
R1	Resistor	510 Ω	0603	Tyco electronics	

Table 8. Components part list (continued)

Component ID	Description	Value	Case size	Manufacturer	Part code
R2	Potentiometer	10 k Ω		Bourns electronics	3214W-1-103E
R3	Resistor	1 k	0603	Tyco electronics	01623440-1
TL1	Transmission line	W=0.92mm	L = 12.1 mm		
TL2	Transmission line	W=0.92mm	L = 3.2 mm		
TL3	Transmission line	W=0.92mm	L = 3.0 mm		
TL4	Transmission line	W= 0.92 mm	L = 3.2 mm		
TL5	Transmission line	W= 0.92 mm	L = 3.9 mm		
TL6	Transmission line	W=0.92mm	L=11.0 mm		
RF in, RF out	SMA-CONN	50 Ω	60 mils	Johnson	142-0701-801
PD85006	LDMOS			STMicroelectronics	PD85006
Board	FR-4 THk=0.020" 2OZ Cu both sides				

7 Package mechanical data


In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Table 9. PowerSO-10RF formed lead (gull wing) mechanical data

Dim.	mm			Inch		
	Min	Typ	Max	Min	Typ	Max
A1	0	0.05	0.1	0.	0.0019	0.0038
A2	3.4	3.5	3.6	0.134	0.137	0.142
A3	1.2	1.3	1.4	0.046	0.05	0.054
A4	0.15	0.2	0.25	0.005	0.007	0.009
a		0.2			0.007	
b	5.4	5.53	5.65	0.212	0.217	0.221
c	0.23	0.27	0.32	0.008	0.01	0.012
D	9.4	9.5	9.6	0.370	0.374	0.377
D1	7.4	7.5	7.6	0.290	0.295	0.298
E	13.85	14.1	14.35	0.544	0.555	0.565
E1	9.3	9.4	9.5	0.365	0.37	0.375
E2	7.3	7.4	7.5	0.286	0.292	0.294
E3	5.9	6.1	6.3	0.231	0.24	0.247
F		0.5			0.019	
G		1.2			0.047	
L	0.8	1	1.1	0.030	0.039	0.042
R1			0.25			0.01
R2		0.8			0.031	
T	2 deg	5 deg	8 deg	2 deg	5 deg	8 deg
T1		6 deg			6 deg	
T2		10 deg			10 deg	

Note: Resin protrusions not included (max value: 0.15 mm per side)

Figure 20. Package dimensions

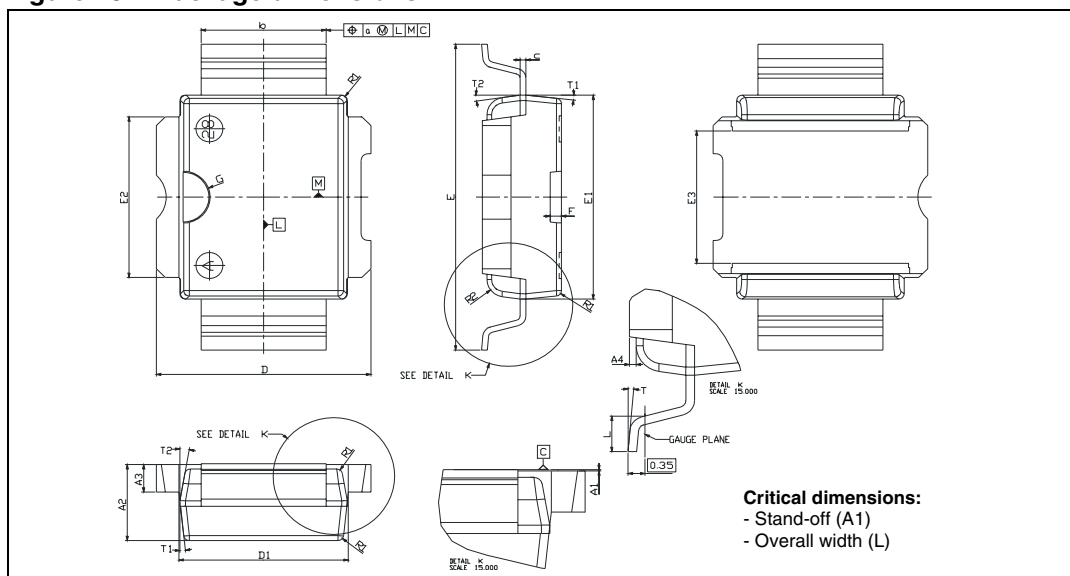

Technical drawing of a mechanical part, showing multiple views and dimensions. The drawing includes a main front view with dimensions in inches (in) and millimeters (mm), and several detail views.

Dimensions (inches):

- Overall width: 14.3 ± 0.2 (M) (22)
- Overall height: 10.1 ± 0.2 (M) (6)
- Internal width: 9.9 ± 0.2 (2)
- Internal height: 17.2 ± 0.2 (M) (4)
- Internal height: 18.8 ± 0.2 (3)
- Internal width: 3.7 ± 0.2 (M) (16)
- Internal width: 0.5 (15)
- Internal width: 0.6 (17)
- Internal width: 0.8 (18)
- Internal width: 1.3 (19)
- Internal width: 4.9 ± 0.2 (20)
- Internal width: 2 (21)
- Internal width: 2 (23)
- Internal width: 0.8 ± 0.1 (M) (24)
- Internal width: 0.8 (25)
- Internal width: 0.8 (26)
- Internal width: 0.8 (27)
- Internal width: 0.8 (28)
- Internal width: 0.8 (29)
- Internal width: 0.8 (30)
- Internal width: 0.8 (31)
- Internal width: 0.8 (32)
- Internal width: 0.8 (33)
- Internal width: 0.8 (34)
- Internal width: 0.8 (35)
- Internal width: 0.8 (36)
- Internal width: 0.8 (37)
- Internal width: 0.8 (38)
- Internal width: 0.8 (39)
- Internal width: 0.8 (40)
- Internal width: 0.8 (41)
- Internal width: 0.8 (42)
- Internal width: 0.8 (43)
- Internal width: 0.8 (44)
- Internal width: 0.8 (45)
- Internal width: 0.8 (46)
- Internal width: 0.8 (47)
- Internal width: 0.8 (48)
- Internal width: 0.8 (49)
- Internal width: 0.8 (50)
- Internal width: 0.8 (51)
- Internal width: 0.8 (52)
- Internal width: 0.8 (53)
- Internal width: 0.8 (54)
- Internal width: 0.8 (55)
- Internal width: 0.8 (56)
- Internal width: 0.8 (57)
- Internal width: 0.8 (58)
- Internal width: 0.8 (59)
- Internal width: 0.8 (60)
- Internal width: 0.8 (61)
- Internal width: 0.8 (62)
- Internal width: 0.8 (63)
- Internal width: 0.8 (64)
- Internal width: 0.8 (65)
- Internal width: 0.8 (66)
- Internal width: 0.8 (67)
- Internal width: 0.8 (68)
- Internal width: 0.8 (69)
- Internal width: 0.8 (70)
- Internal width: 0.8 (71)
- Internal width: 0.8 (72)
- Internal width: 0.8 (73)
- Internal width: 0.8 (74)
- Internal width: 0.8 (75)
- Internal width: 0.8 (76)
- Internal width: 0.8 (77)
- Internal width: 0.8 (78)
- Internal width: 0.8 (79)
- Internal width: 0.8 (80)
- Internal width: 0.8 (81)
- Internal width: 0.8 (82)
- Internal width: 0.8 (83)
- Internal width: 0.8 (84)
- Internal width: 0.8 (85)
- Internal width: 0.8 (86)
- Internal width: 0.8 (87)
- Internal width: 0.8 (88)
- Internal width: 0.8 (89)
- Internal width: 0.8 (90)
- Internal width: 0.8 (91)
- Internal width: 0.8 (92)
- Internal width: 0.8 (93)
- Internal width: 0.8 (94)
- Internal width: 0.8 (95)
- Internal width: 0.8 (96)
- Internal width: 0.8 (97)
- Internal width: 0.8 (98)
- Internal width: 0.8 (99)
- Internal width: 0.8 (100)

Scale: 10,000

Scale: 5,000

Scale: 2,000

Scale: 1,000

Scale: 500

Scale: 250

Scale: 125

Scale: 62.5

Scale: 31.25

Scale: 15.625

Scale: 7.8125

Scale: 3.90625

Scale: 1.953125

Scale: 0.9765625

Scale: 0.48828125

Scale: 0.244140625

Scale: 0.1220703125

Scale: 0.06103515625

Scale: 0.030517578125

Scale: 0.0152587890625

Scale: 0.00762939453125

Scale: 0.003814697265625

Scale: 0.0019073486328125

Scale: 0.00095367431640625

Scale: 0.000476837158203125

Scale: 0.0002384185791015625

Scale: 0.00011920928955078125

Scale: 0.000059604644775390625

Scale: 0.0000298023223876953125

Scale: 0.00001490116119384765625

Scale: 0.000007450580596923828125

Scale: 0.0000037252902984619140625

Scale: 0.00000186264514923095703125

Scale: 0.000000931322574615478515625

Scale: 0.0000004656612873077392578125

Scale: 0.00000023283064365386962890625

Scale: 0.000000116415321826934814453125

Scale: 0.000000582076609134674072265625

Scale: 0.0000002910383045673370361328125

Scale: 0.00000014551915228366851806640625

Scale: 0.000000072759576141834259033203125

Scale: 0.0000000363797880709171295166015625

Scale: 0.00000001818989403545856475830078125

Scale: 0.000000009094947017729282379150390625

Scale: 0.0000000045474735088646411895751953125

Scale: 0.00000000227373675443232059478759765625

Scale: 0.000000001136868377216160297393798828125

Scale: 0.0000000005684341886080801486968994140625

Scale: 0.00000000028421709430404007434844970703125

Scale: 0.000000000142108547152020037174224853515625

Scale: 0.0000000000710542735760100185871124267578125

Scale: 0.00000000003552713678800500929355621337890625


Scale: 0.000000000017763568394002504646778106689453125

Scale: 0.0000000000088817841970012523233890533447265625

Scale: 0.00000000000444089209850062616169452667236328125

Scale: 0.000000000002220446049250313080847263336181640625

Figure 22. Reel information

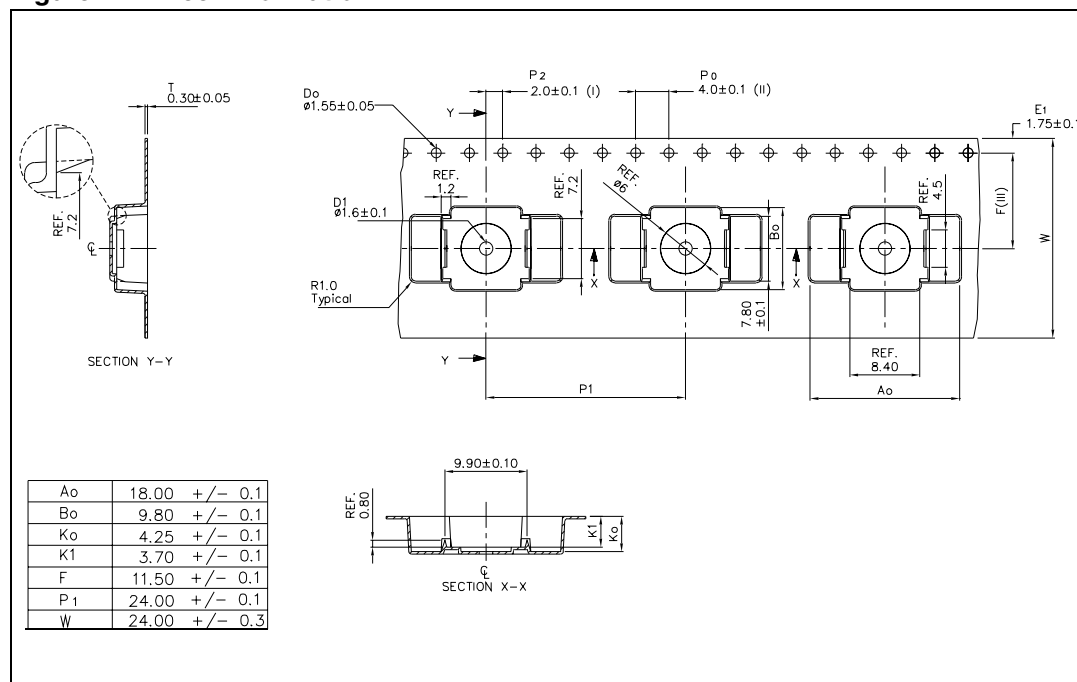

8 Revision history

Table 10. Document revision history

Date	Revision	Changes
03-Sep-2009	1	Initial release.
29-Oct-2009	2	Updated figure on cover page.
04-Aug-2010	3	Added device shipped in tape and reel, see Table 1: Device summary .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

