


DIMENSIONS: mm

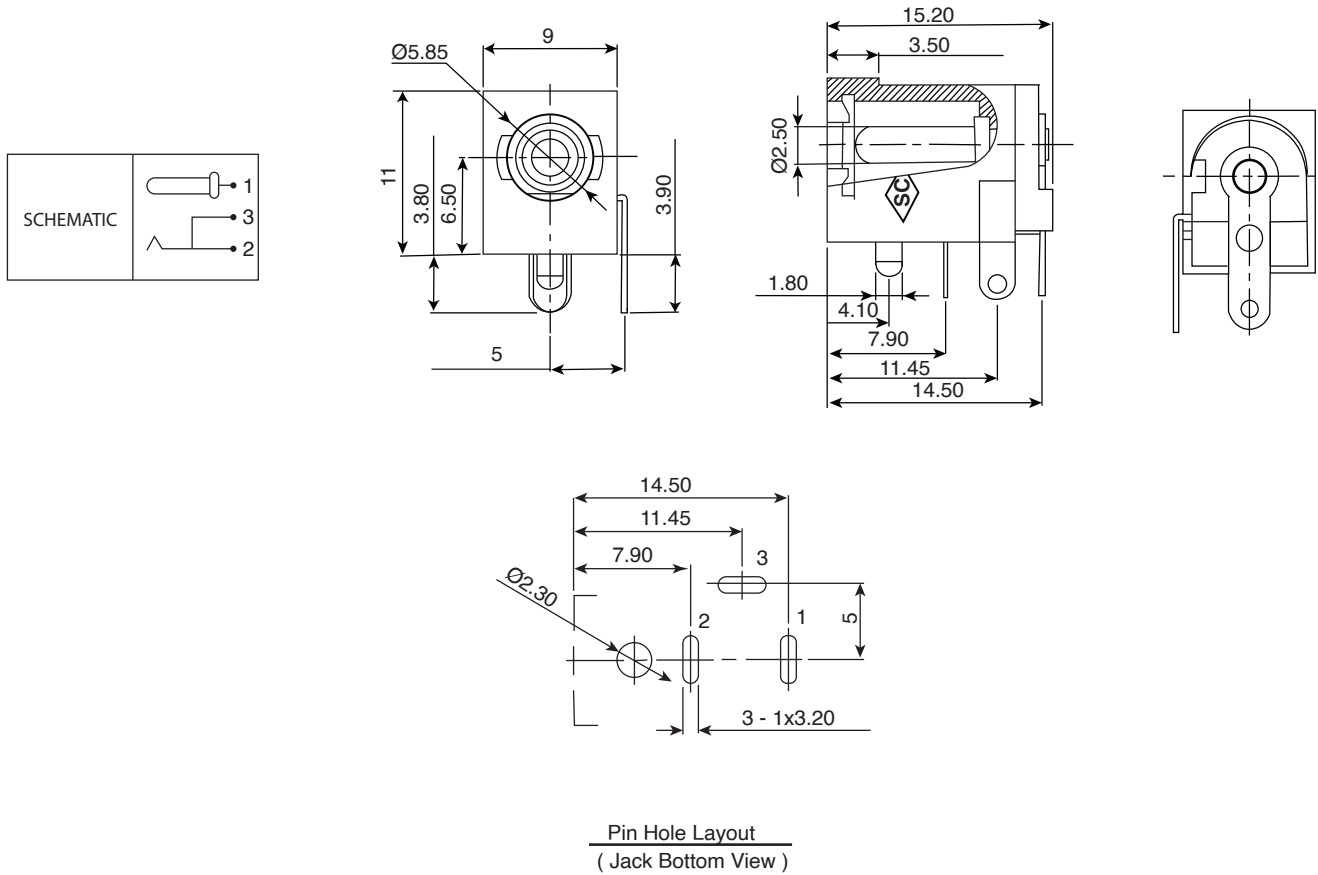

Pin Hole Layout
(Jack Bottom View)

SPECIFICATIONS:

- Contact Resistance: 30m Ω max
- Current Rating: 5A/24VDC max
- Insulation Resistance: 100M Ω min at 500VDC
- Dielectric Withstand Voltage: 500VAC for one minute.

Note:

- RoHS Compliant by Exemption