


### DIMENSIONS: mm

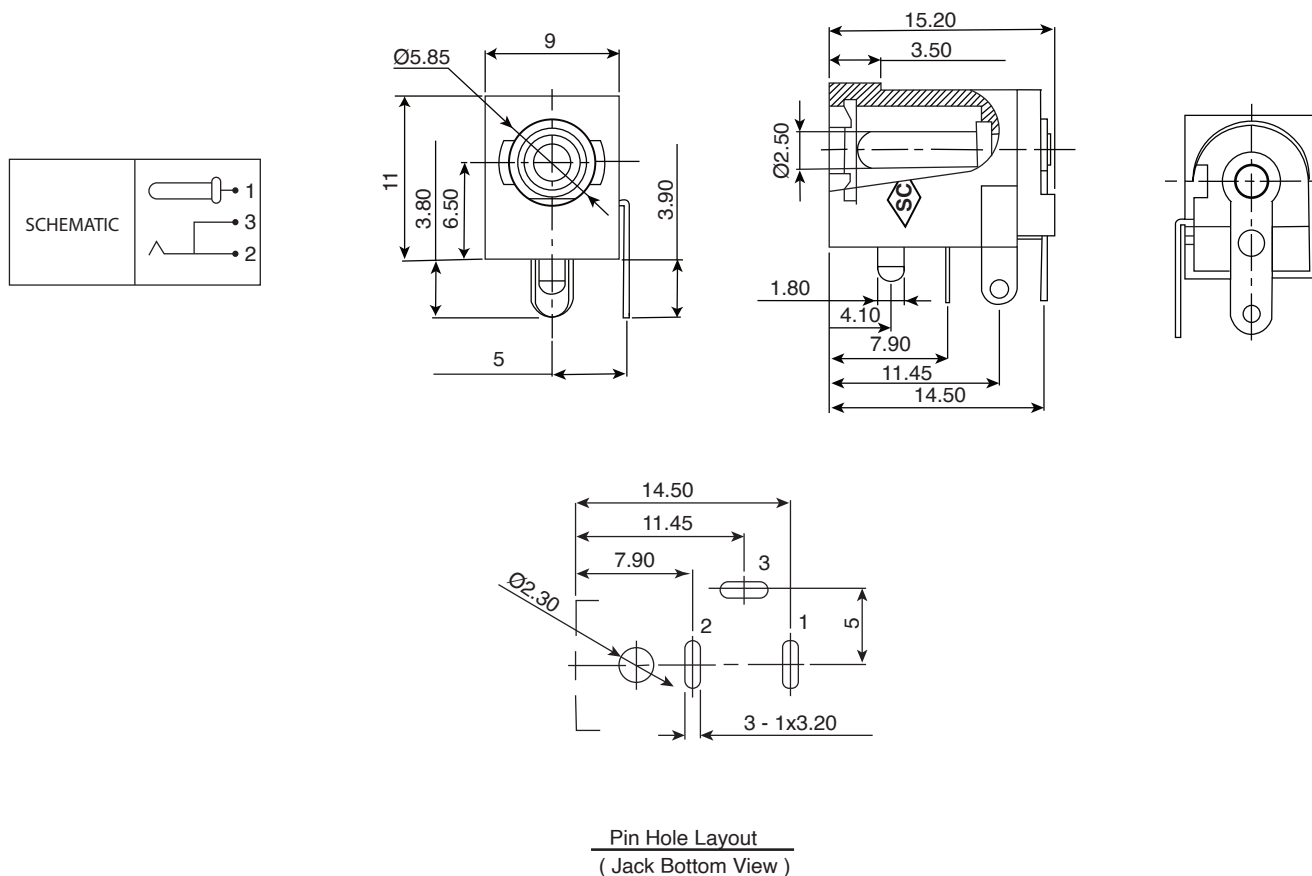

Pin Hole Layout  
( Jack Bottom View )

### SPECIFICATIONS:

- Contact Resistance: 30m $\Omega$  max
- Current Rating: 5A/24VDC max
- Insulation Resistance: 100M $\Omega$  min at 500VDC
- Dielectric Withstand Voltage: 500VAC for one minute.

### Note:

- RoHS Compliant by Exemption