



LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
			BA1	REVISED PER ECO-11-005150	28MAR2011	RK	HMR

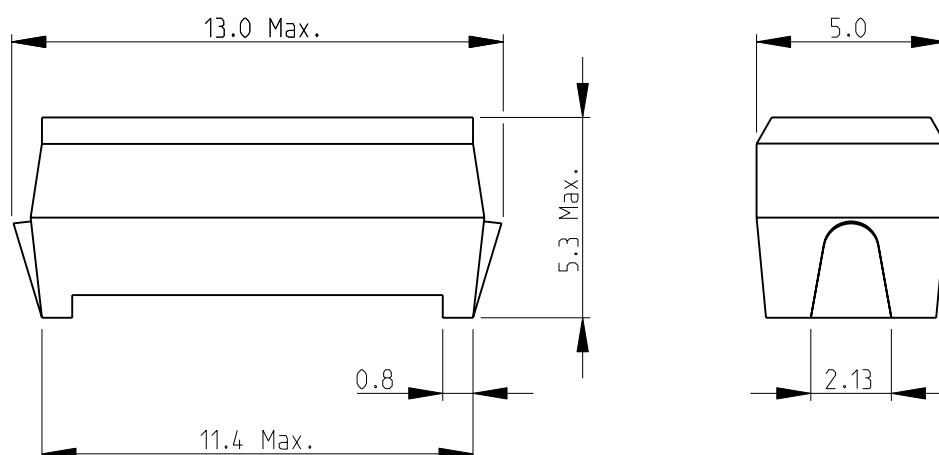


1 PACKAGING: SUPPLIED TAPED AND REELED ON 13" REELS IN QUANTITIES OF 1500 PIECES

2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3615 SERIES-HIGH CURRENT INDUCTOR SMD

RECOMMENDED LAND PATTERN

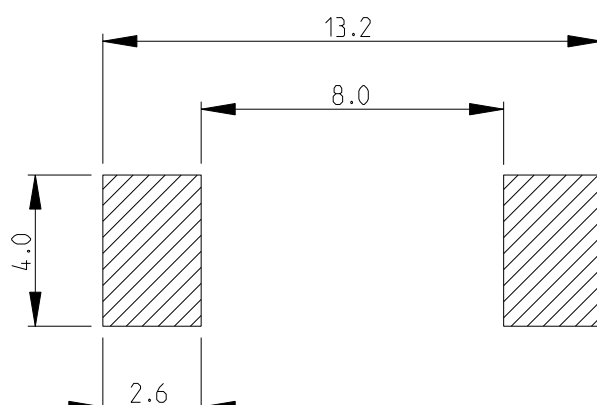

RoHS Compliant

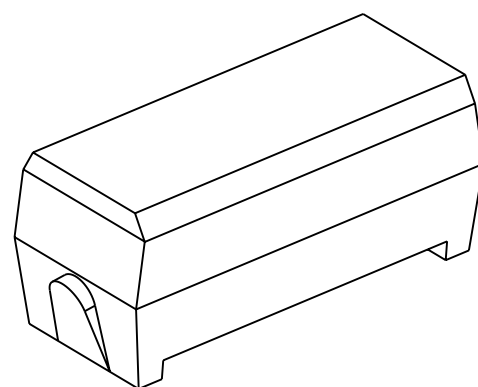

2008


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -

© COPYRIGHT 2008

DIMENSIONS:		DWN	13-NOV-08	MATERIAL		FINISH					
mm		SUBHASH.M		-		-					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	13-NOV-08	TE Connectivity							
		PRAKASH.S									
		APVD	13-NOV-08								
		STEPHEN.P									
0 PLC ±0.2		PRODUCT SPEC		NAME							
1 PLC ±0.1		-									
2 PLC ±-		APPLICATION SPEC		HIGH CURRENT INDUCTOR SMD SERIES 3615							
3 PLC ±-		-									
4 PLC ±-				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
ANGLES ±5°				A 4		00779		C-1624097		-	
		WEIGHT 0.7g max.		CUSTOMER DRAWING							
				SCALE		5:1		SHEET 1 OF 1		REV BA1	