
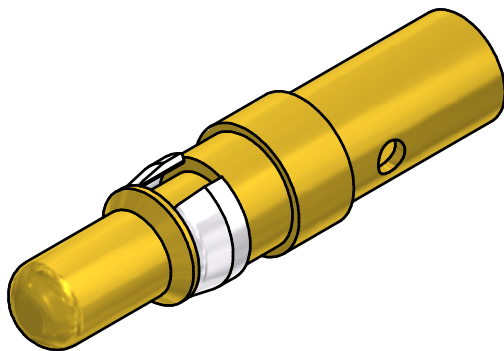
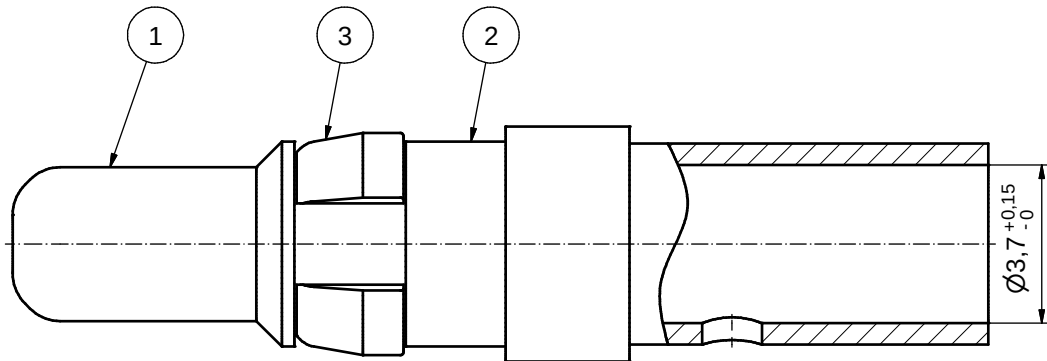


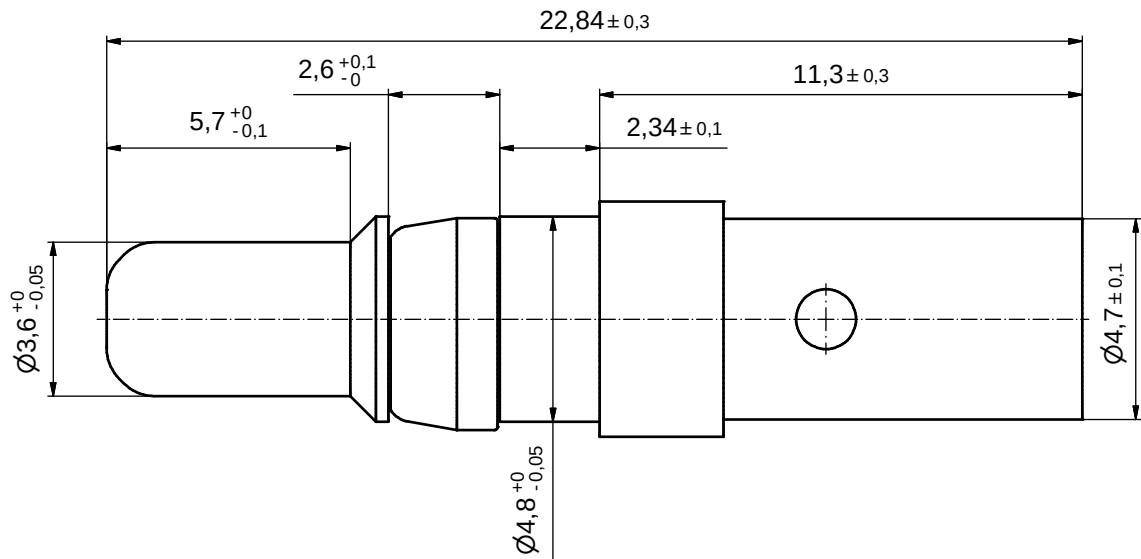

NOTES:

CRIMPING:

USE CRIMP TOOL: 360X10409X

WITH TOOL INSERT: 360X20029X


SELECTOR SETTINGS: 7 FOR AWG 10

6 FOR AWG 12

(b)

plating	part no.
GOLD FLASH over NICKEL	131A11039X
30µin HARD GOLD over min. 50µin NICKEL	131C11039X
50µin HARD GOLD over min. 50µin NICKEL	131J11039X

STRIPPING DIMENSIONS

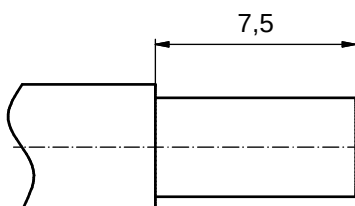

3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
1	1	MATING SIDE	COPPER ALLOY	see table
pos	qty	description	material	plating
partlist				
tolerance			dim. in mm	scale: 8:1
				material: see partlist
			drawn	12.07.12
			appd.	12.07.12
			norm	
			d-old	13K1ID3A / 13K2ID3A
1 x b	A4380	12.07.12	HS	
a	Original			
rev.	description	date	name	
CONEC®				
title:				HIGH POWER CONTACT MALE
				CRIMP VERSION 30A FOR AWG 10-12
				D-SUB COMBINATION
dwg no:				13K1A4010
part no:				see table
				DIN-A3
				sh: 1

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND