
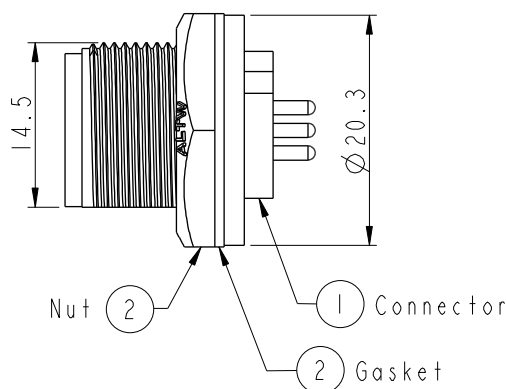

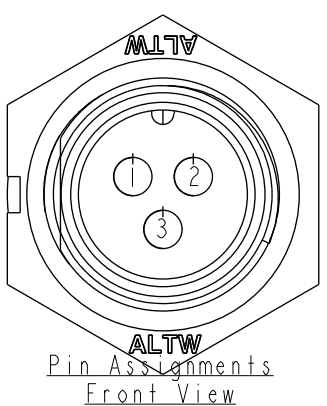


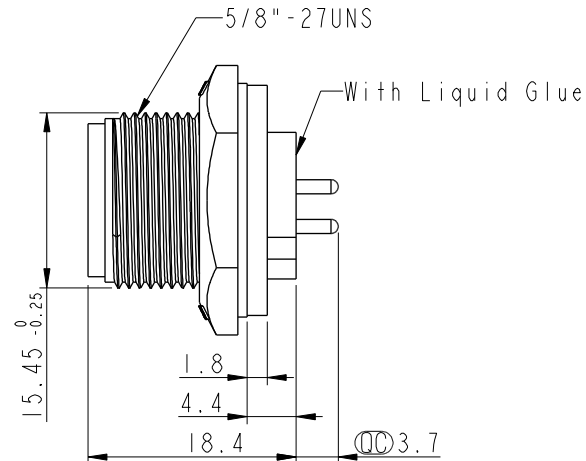


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0475	2008/09/17	Shin	Add Note and Update Drawing to New Format
C	LEN1530184	2014/12/19	Ruru	Change Logo
D	CI90274	2019/02/20	Ruru	Modify Note

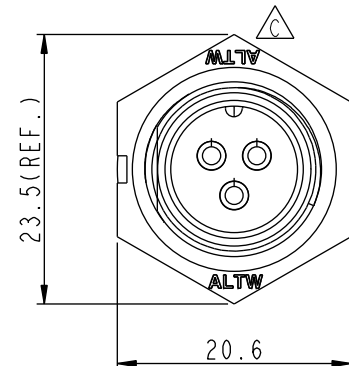

- Note: 
- *  Important Dimensions To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - *  Use with Waterproof Cap or Dustcap
Panel Thickness Max: 3.0mm
 - *  Use without Waterproof Cap or Dustcap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard,Panel Screw 3Pin M Conn M Pin		BB-03PMMP-SC7001		Ruru		2019-02-20	
.XXX ±0.05		ANGLES ±1°		SCALE 1:1		DWG NO BB-03PMMP-SC7001		CHECKED BY Rita		DATE 2019-02-20	
				REV. D		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-20	
				SIZE A4							
				WC-REV. A.3							
				SHEET 1 OF 1							
				QC:Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司