


Isolation (115VAC to 90-130VAC) 169 Series

Hard Wired



Features

- Primary 115VAC, 60 Hz.
- Secondary taps @ 90, 100, 110, 115, 120 & 130VAC
- Electrostatic shield between primary & secondary
- Connection by flexible leads, 8" minimum length
- Perfect for critical line voltage needs (examples: older "classic" tube equipment or Japanese 100V equipment).
- CSA certified (# LR3902) - except 169J
- **Remember** - These units do NOT convert line frequency

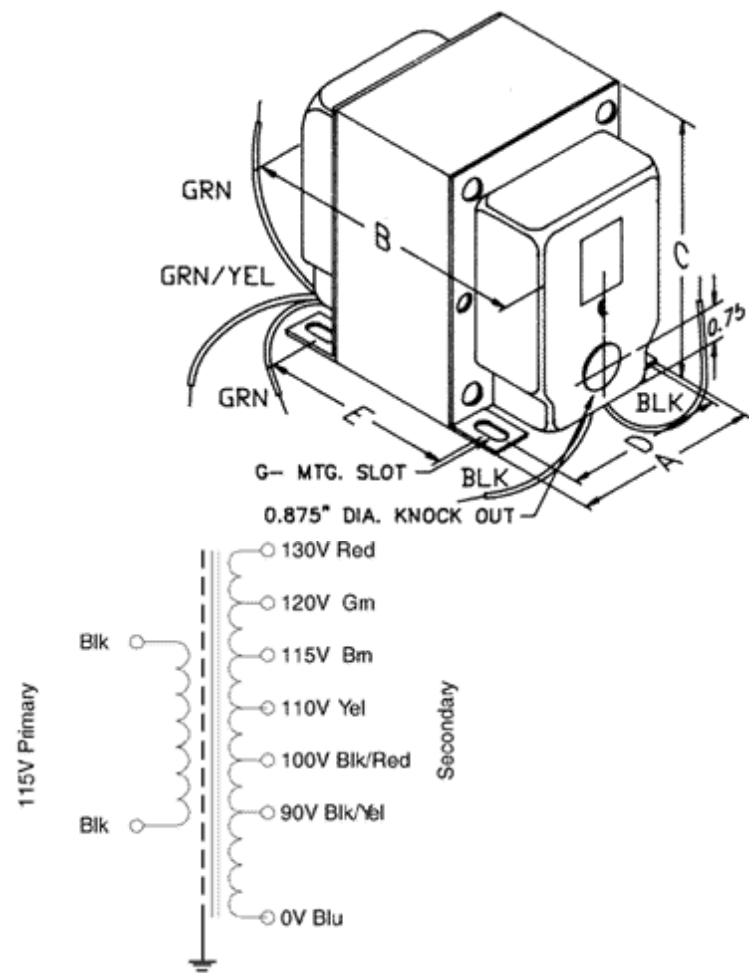

| Part No. | Capacity | Overall Dimensions |      |      |      |      | Weight |
|----------|----------|--------------------|------|------|------|------|--------|
|          | VA       | A                  | B    | C    | D    | E    | Lbs    |
| 169C     | 100      | 2.50               | 3.50 | 3.20 | 2.00 | 2.44 | 4      |
| 169E     | 250      | 3.75               | 5.44 | 4.56 | 3.00 | 4.31 | 14.5   |
| 169G     | 500      | 3.75               | 5.44 | 4.56 | 3.00 | 4.31 | 15     |
| 169J     | 750      | 4.38               | 6.10 | 5.30 | 3.50 | 4.50 | 22     |

© 2020. Hammond Manufacturing Ltd. All rights reserved.