NOTES:

I. MATERIALS AND FINISHES:
BODY AND BAYONET SLEEVE - BRASS, NICKEL PLATING
OUTER CONTACT - BeCu, NICKEL PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC - 6 GHz

C. VSWR: I.O5 MAX @ 6 GHz

3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:

A. QUANTITY: SINGLE PACK


B. MARKING: BAG TO BE MARKED:


"AMPHENOL RF, APH-HDBNCP-SMAJ DATE CODE"

U.S. PATENT NO. 7,553,177"

5. HIGH DENSITY INSTALLATION/REMOVAL TOOL: AMPHENOL 227-T2000



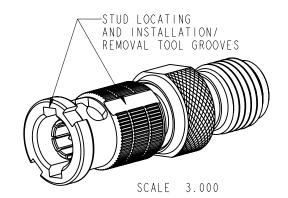

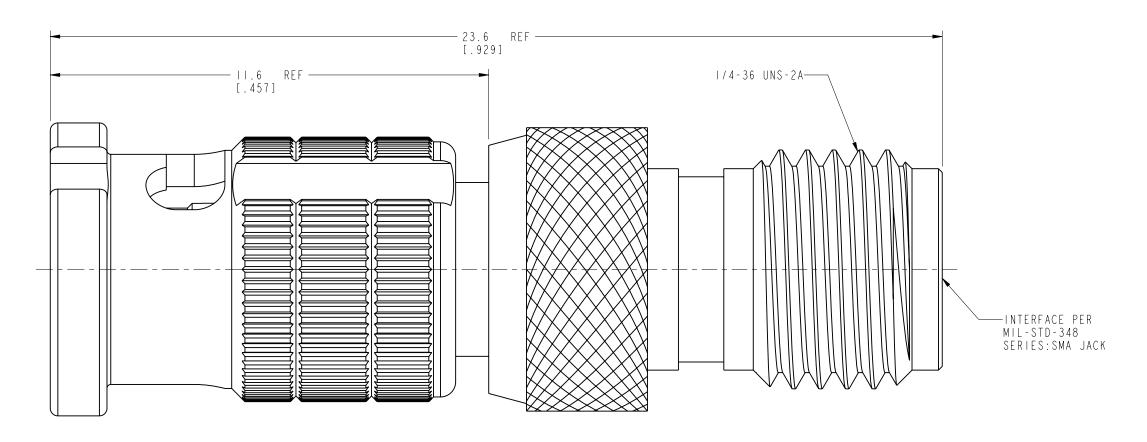

PROTECTED UNDER U.S. PATENT # 7,553,177

CUSTOMER OUTLINE DRAWING ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: MATERIAL DATE DRAWN TITLE 6 - 30mm 30 - 120mm ANGLES Amphenol RF <0.5mm 0.5 - 6mm 22-May-13 T.DENG \pm 0.05mm $\pm\,$ 0 . I mm ±0.2mm ± 0.3mm HD BNC PLUG TO SEE NOTES NOTICE - These drawings, specifications, or other data (I) are, and remain the ENGINEER DATE property of Amphenol corp. (2) must be returned upon requiest; and (3) arre SMA JACK 50 OHM www.amphenolrf.com A ARUN PRABU 13-Jun-11 confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the funishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data. ADAPTER REFERENCE EAR # 4800 APPROVED DATE DRAWING NO.APH-HDBNCP-SMAJ S.HSIEH SCALE: ||.0:|.0| SHEET 2 OF 2 22-May-13 ITEM NO APH-HDBNCP-SMAJ CONFIGURATION LEVEL: CAD FILE DWG SIZE REV PART NO APH-HDBNCP-SMAJ FINISH