


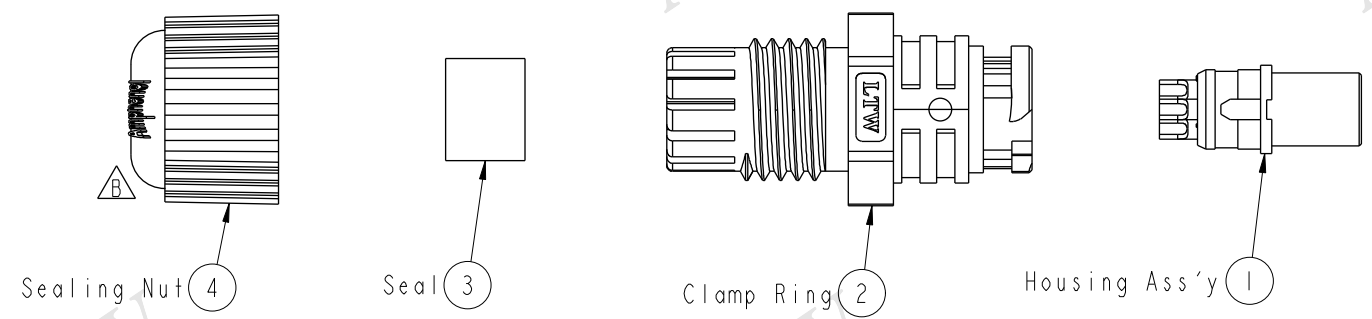


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/25	Ruru	PLD-03BMFA-QL7001 To PLD-03BMFA-QL7001
B	LEN1510152	2015/01/08	Vicky	Update Logo & Tolerance



Pin Assignments
Front View

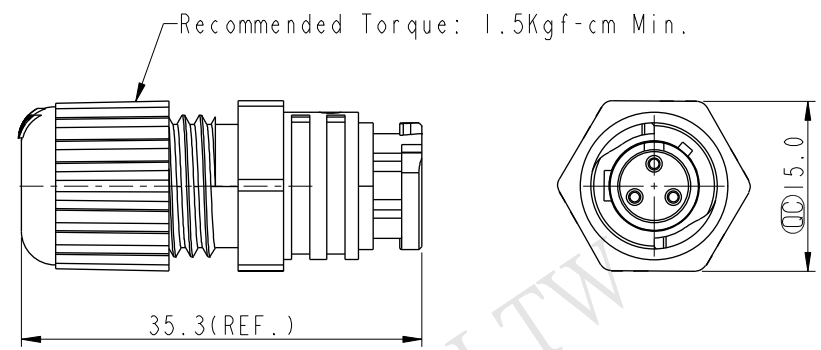

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67.
- * Female Pin: Copper Alloy, Gold Plated.
- * Housing: Nylon, UL 94V-0, Black.
- * Seal: Silicone, UL 94V-0, Gray.
- * Clamp Ring: Nylon, UL 94V-2, Black.
- * Sealing Nut: Nylon, UL 94V-2, Black.
- * Seal for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
- * Operating Voltage Max: AC 300 V Rms.
- * Operating Current Max: 5A.
- * One Set Unassembled In One Bag.

UNIT:mm				TITLE ASSY,PUSH LOCK,3PIN M CONN F PIN			Amphenol LTW		ITEM NO PLD-03BMFA-QL7001		DRAWN BY Vicky		DATE 2015-01-08						
TOLERANCE ±0.5 mm						SCALE 3:2			SIZE A4		SHEET 1 OF 1			DWG NO PLD-03BMFA-QL7001		CHECKED BY Sam		DATE 2015-01-08	
						REV. B			WC-REV. A.2		QC: Inspection item			CUSTOMER ALTW		APPROVED BY Rita		DATE 2015-01-08	
1		2		3		4		5		6		7		8		FWW10702-01-02A1			