



N FEMALE - C MALE STRAIGHT ADAPTER

R191.705.000

Série : ADAPT

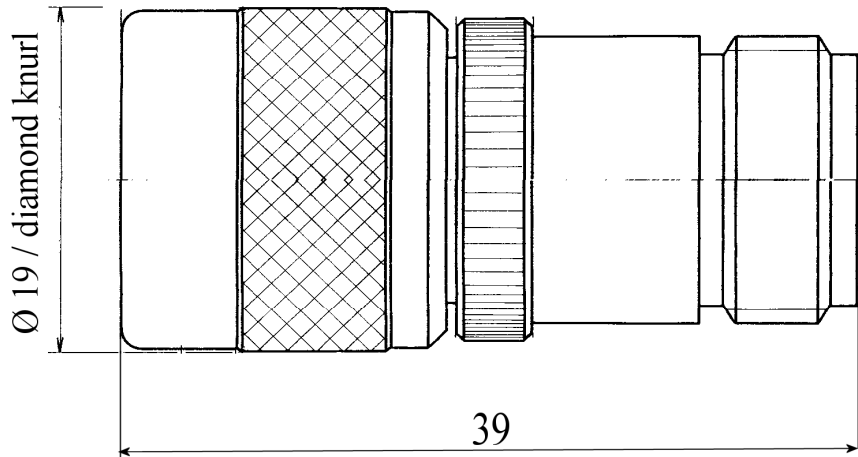

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	LAITON	NICKEL 2
CENTER CONTACT	CUPRO BERYLLIUM	OR 0.5 SUR NICKEL 2
OUTER CONTACT	LAITON	NICKEL 2
INSULATOR	PTFE	
GASKET	ELASTOMERE SILICONE	
OTHERS PARTS	LAITON	NICKEL 2
-	-	-
-	-	-

Issue : 1013 M

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



N FEMALE - C MALE STRAIGHT ADAPTER

R191.705.000

Série : ADAPT

PACKAGING

SPECIFICATION

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance		50 Ω
Frequency		0-11 GHz
VSWR	1.35 +	0,0000 x F(GHz) Maxi
Insertion loss		0.067 √F(GHz) dB Maxi
RF leakage	- (- F(GHz)) dB Maxi
Voltage rating		- Veff Maxi
Dielectric withstanding voltage		1500 Veff mini
Insulation resistance		5000 MΩ mini

Operating	-55/+155 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

MECHANICAL CHARACTERISTICS

OTHERS CHARACTERISTICS

Center contact retention		
Axial force – Mating end		27 N mini
Axial force – Opposite end		27 N mini
Torque		NA N.cm mini
Recommended torque		
Mating	C	0 N.cm
	N	0 N.cm
	-	0 N.cm
Panel nut		NA N.cm
Mating life		0 Cycles mini
Weight		46,0000 g

Issue : 1013 M

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



RADIALL®