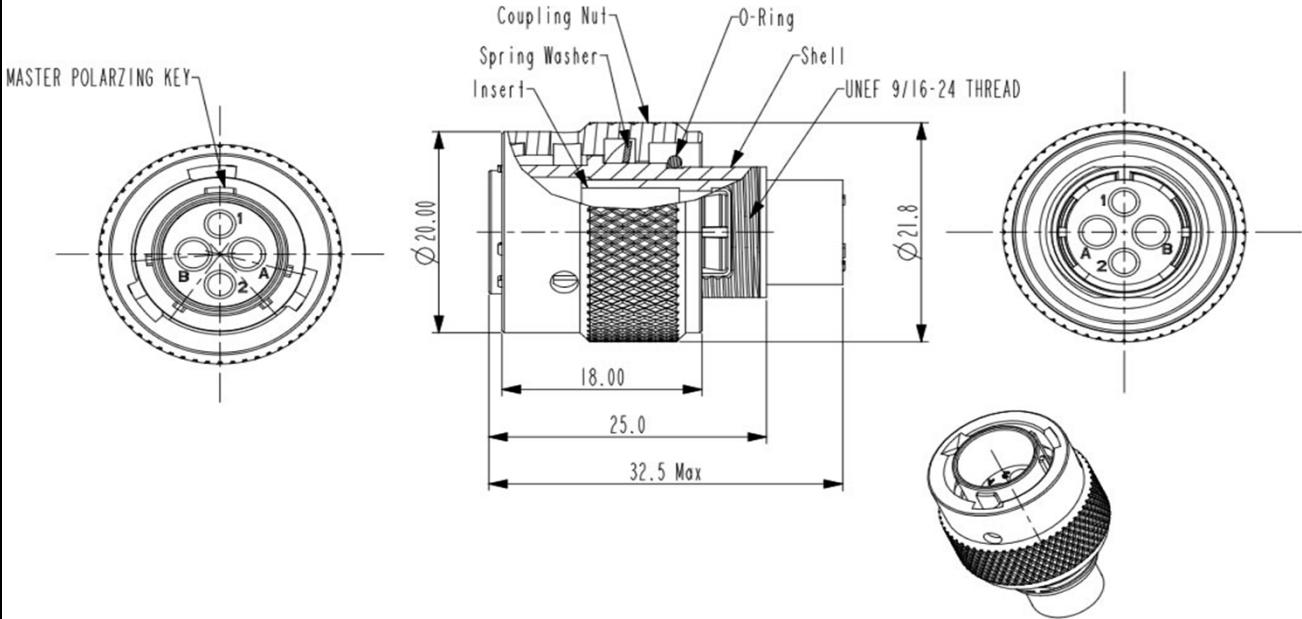


CONFIGURATION		PART NUMBER
Male Plug, 4 Pin, 20 Awg & 16 Awg, Shell 10		RT06102PNH
DIMENSIONS		
 <p>Technical drawing of the RT06102PNH connector. The drawing includes three views: a front view on the left showing the 'MASTER POLARIZING KEY' and pin positions 1, 2, A, and B; a side view in the center showing the internal components (Coupling Nut, Spring Washer, Insert, O-Ring, Shell) and dimensions (Ø 20.00, 18.00, 25.0, 32.5 Max, Ø 21.8); and a rear view on the right showing the 'UNEf 9/16-24 THREAD'. An isometric view is shown at the bottom right.</p>		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	350V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:	Aluminum, Nickel Plated	
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	-	
CURRENT:	2-16Awg at 13A and 2-20Awg at 5A	
CONTACT SIZE:	20 Awg & 16 Awg	
APPROVALS:	UL ECBT2	