

### FEATURES

- Sample Rate: 80Msps/65Msps
- 81.5dBFS Noise Floor
- 100dB SFDR
- SFDR >95dB at 70MHz
- 85fs<sub>RMS</sub> Jitter
- 2.75V<sub>P-P</sub> Input Range
- 400MHz Full Power Bandwidth S/H
- Optional Internal Dither
- Optional Data Output Randomizer
- LVDS or CMOS Outputs
- Single 3.3V Supply
- Power Dissipation: 970mW/700mW
- Clock Duty Cycle Stabilizer
- Pin-Compatible with LTC2208, LTC2217
- 64-Pin (9mm × 9mm) QFN Package

### APPLICATIONS

- Telecommunications
- Receivers
- Cellular Base Stations
- Spectrum Analysis
- Imaging Systems
- ATE

### DESCRIPTION

The LTC®2216/LTC2215 are 80Msps/65Msps sampling 16-bit A/D converters designed for digitizing high frequency, wide dynamic range signals with input frequencies up to 400MHz. The input range of the ADC is fixed at 2.75V<sub>P-P</sub>.



The LTC2216/LTC2215 are perfect for demanding communications applications, with AC performance that includes 81.5dBFS noise floor and 100dB spurious free dynamic range (SFDR). Ultra low jitter of 85fs<sub>RMS</sub> allows undersampling of high input frequencies while maintaining excellent noise performance. Maximum DC specs include ±3.5LSB INL, ±1LSB DNL (no missing codes).

The digital output can be either differential LVDS or single-ended CMOS. There are two format options for the CMOS outputs: a single bus running at the full data rate or demultiplexed buses running at half data rate. A separate output power supply allows the CMOS output swing to range from 0.5V to 3.6V.

The ENC<sup>+</sup> and ENC<sup>-</sup> inputs may be driven differentially or single-ended with a sine wave, PECL, LVDS, TTL or CMOS inputs. An optional clock duty cycle stabilizer allows high performance at full speed with a wide range of clock duty cycles.

LT, LT, LTC and LTM are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

### TYPICAL APPLICATION

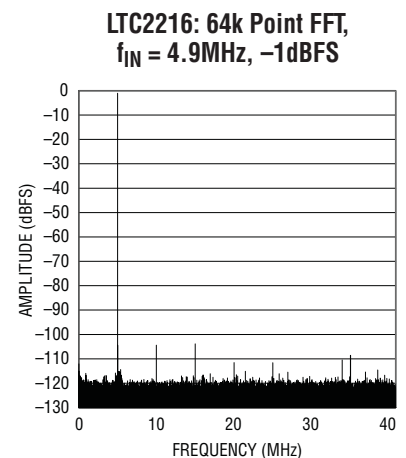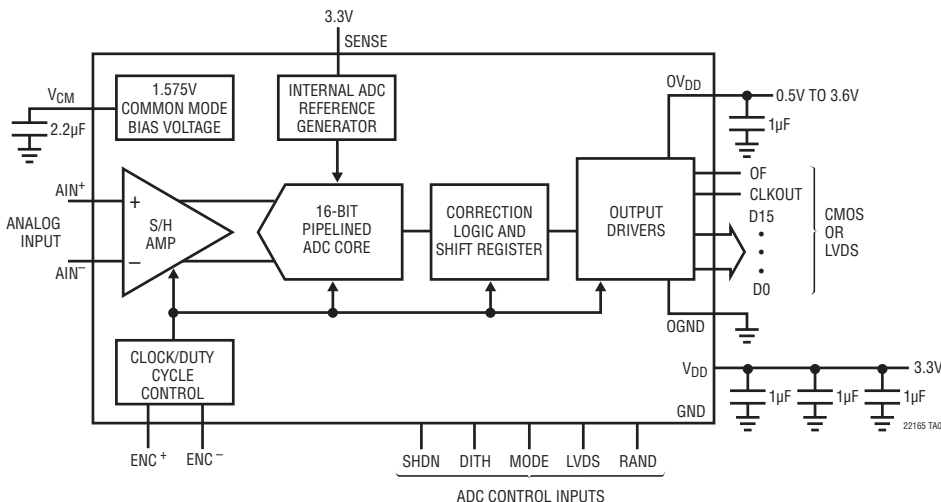


# LTC2216/LTC2215

## ABSOLUTE MAXIMUM RATINGS

$OV_{DD} = V_{DD}$  (Notes 1 and 2)

|                                             |                               |
|---------------------------------------------|-------------------------------|
| Supply Voltage ( $V_{DD}$ )                 | –0.3V to 4V                   |
| Digital Output Supply Voltage ( $OV_{DD}$ ) | –0.3V to 4V                   |
| Digital Output Ground Voltage (OGND)        | –0.3V to 1V                   |
| Analog Input Voltage (Note 3)               | –0.3V to ( $V_{DD} + 0.3V$ )  |
| Digital Input Voltage                       | –0.3V to ( $V_{DD} + 0.3V$ )  |
| Digital Output Voltage                      | –0.3V to ( $OV_{DD} + 0.3V$ ) |
| Power Dissipation                           | 2000mW                        |
| Operating Temperature Range                 |                               |
| LTC2215C/LTC2216C                           | 0°C to 70°C                   |
| LTC2215I/LTC2216I                           | –40°C to 85°C                 |
| Storage Temperature Range                   | –65°C to 150°C                |

## PIN CONFIGURATION

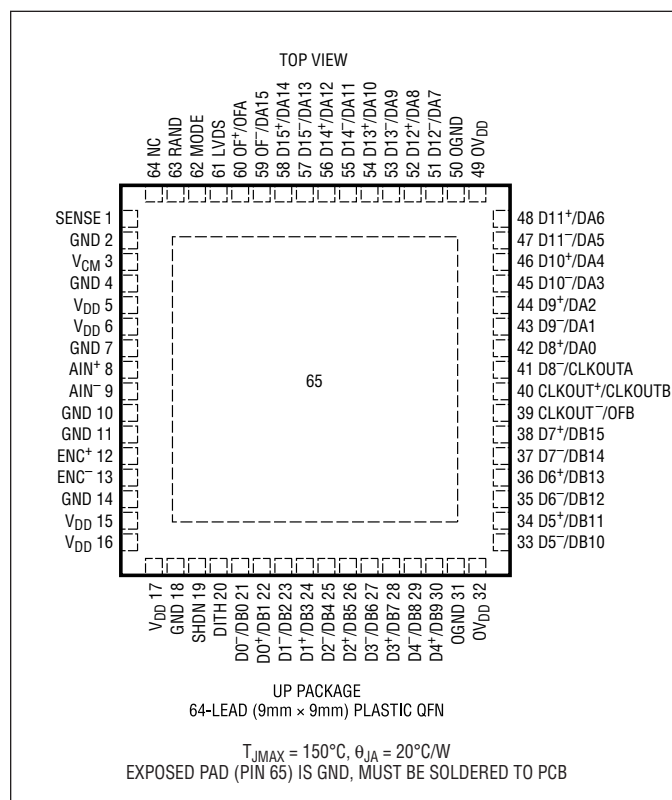

## ORDER INFORMATION

| LEAD FREE FINISH  | TAPE AND REEL    | PART MARKING | PACKAGE DESCRIPTION             | TEMPERATURE RANGE |
|-------------------|------------------|--------------|---------------------------------|-------------------|
| LTC2215CUP#PBF    | LTC2215CUP#TRPBF | LTC2215UP    | 64-Lead (9mm × 9mm) Plastic QFN | 0°C to 70°C       |
| LTC2215IUP#PBF    | LTC2215IUP#TRPBF | LTC2215UP    | 64-Lead (9mm × 9mm) Plastic QFN | –40°C to 85°C     |
| LTC2216CUP#PBF    | LTC2216CUP#TRPBF | LTC2216UP    | 64-Lead (9mm × 9mm) Plastic QFN | 0°C to 70°C       |
| LTC2216IUP#PBF    | LTC2216IUP#TRPBF | LTC2216UP    | 64-Lead (9mm × 9mm) Plastic QFN | –40°C to 85°C     |
| LEAD BASED FINISH | TAPE AND REEL    | PART MARKING | PACKAGE DESCRIPTION             | TEMPERATURE RANGE |
| LTC2215CUP        | LTC2215CUP#TR    | LTC2215UP    | 64-Lead (9mm × 9mm) Plastic QFN | 0°C to 70°C       |
| LTC2215IUP        | LTC2215IUP#TR    | LTC2215UP    | 64-Lead (9mm × 9mm) Plastic QFN | –40°C to 85°C     |
| LTC2216CUP        | LTC2216CUP#TR    | LTC2216UP    | 64-Lead (9mm × 9mm) Plastic QFN | 0°C to 70°C       |
| LTC2216IUP        | LTC2216IUP#TR    | LTC2216UP    | 64-Lead (9mm × 9mm) Plastic QFN | –40°C to 85°C     |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

## CONVERTER CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| PARAMETER                    | CONDITIONS                         |   | MIN | TYP       | MAX       | UNITS                        |
|------------------------------|------------------------------------|---|-----|-----------|-----------|------------------------------|
| Integral Linearity Error     | Differential Analog Input (Note 5) | ● |     | $\pm 1.2$ | $\pm 3.5$ | LSB                          |
| Differential Linearity Error | Differential Analog Input          | ● |     | 0.16/–0.2 | $\pm 1$   | LSB                          |
| Offset Error                 | (Note 6)                           | ● |     | $\pm 1.5$ | $\pm 8$   | mV                           |
| Offset Drift                 |                                    |   |     | $\pm 4$   |           | $\mu\text{V}/^\circ\text{C}$ |
| Gain Error                   | External Reference                 | ● |     | $\pm 0.3$ | $\pm 1$   | %FS                          |
| Full-Scale Drift             | Internal Reference                 |   |     | –65       |           | $\text{ppm}/^\circ\text{C}$  |
|                              | External Reference                 |   |     | $\pm 12$  |           | $\text{ppm}/^\circ\text{C}$  |
| Transition Noise             | External Reference                 |   |     | 2         |           | $\text{LSB}_{\text{RMS}}$    |

## ANALOG INPUT

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL              | PARAMETER                                                  | CONDITIONS                                                           |   | MIN | TYP   | MAX | UNITS            |
|---------------------|------------------------------------------------------------|----------------------------------------------------------------------|---|-----|-------|-----|------------------|
| $V_{\text{IN}}$     | Analog Input Range ( $A_{\text{IN}}^+ - A_{\text{IN}}^-$ ) | $3.135\text{V} \leq V_{\text{DD}} \leq 3.465\text{V}$                |   |     | 2.75  |     | $V_{\text{P-P}}$ |
| $V_{\text{IN, CM}}$ | Analog Input Common Mode                                   | Differential Input (Note 7)                                          | ● | 1.2 | 1.575 | 1.8 | V                |
| $I_{\text{IN}}$     | Analog Input Leakage Current                               | $0\text{V} \leq A_{\text{IN}}^+, A_{\text{IN}}^- \leq V_{\text{DD}}$ | ● | –1  |       | 1   | $\mu\text{A}$    |
| $I_{\text{SENSE}}$  | SENSE Input Leakage Current                                | $0\text{V} \leq \text{SENSE} \leq V_{\text{DD}}$                     | ● | –3  |       | 3   | $\mu\text{A}$    |
| $I_{\text{MODE}}$   | MODE Pin Pull-Down Current to GND                          |                                                                      |   |     | 10    |     | $\mu\text{A}$    |
| $I_{\text{LVDS}}$   | LVDS Pin Pull-Down Current to GND                          |                                                                      |   |     | 10    |     | $\mu\text{A}$    |
| $C_{\text{IN}}$     | Analog Input Capacitance                                   | Sample Mode $\text{ENC}^+ < \text{ENC}^-$                            |   |     | 9.1   |     | pF               |
|                     |                                                            | Hold Mode $\text{ENC}^+ > \text{ENC}^-$                              |   |     | 1.8   |     | pF               |
| $t_{\text{AP}}$     | Sample-and-Hold Acquisition Delay Time                     |                                                                      |   |     | 0.35  |     | ns               |
| $t_{\text{JITTER}}$ | Sample-and-Hold Aperture Jitter                            |                                                                      |   |     | 85    |     | fs RMS           |
| CMRR                | Analog Input Common Mode Rejection Ratio                   | $1.2\text{V} < (A_{\text{IN}}^+ = A_{\text{IN}}^-) < 1.8\text{V}$    |   |     | 80    |     | dB               |
| BW-3dB              | Full Power Bandwidth                                       | $R_S < 25\Omega$                                                     |   |     | 400   |     | MHz              |

# LTC2216/LTC2215

**DYNAMIC ACCURACY** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $A_{IN} = -1\text{dBFS}$  with 2.75V range unless otherwise noted. (Note 4)

| SYMBOL  | PARAMETER                                                          | CONDITIONS                                                            | LTC2215 |      |      | LTC2216 |      |      | UNITS |
|---------|--------------------------------------------------------------------|-----------------------------------------------------------------------|---------|------|------|---------|------|------|-------|
|         |                                                                    |                                                                       | MIN     | TYP  | MAX  | MIN     | TYP  | MAX  |       |
| SNR     | Signal-to-Noise Ratio                                              | 5MHz Input                                                            |         | 81.5 |      |         | 81.3 |      | dBFS  |
|         |                                                                    | 15MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 80.8 | 81.4 |         | 80.6 | 81.2 | dBFS  |
|         |                                                                    | 15MHz Input ●                                                         | 80.5    | 81   |      | 80.2    | 80.8 |      | dBFS  |
|         |                                                                    | 30MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 81.2 |      |         | 81.1 |      | dBFS  |
|         |                                                                    | 70MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 80   | 80.6 |         | 80   | 80.5 | dBFS  |
|         |                                                                    | 70MHz Input ●                                                         | 79.7    | 80.2 |      | 79.7    | 80.2 |      | dBFS  |
| SFDR    | Spurious Free Dynamic Range<br>2nd or 3rd Harmonic                 | 140MHz Input                                                          |         | 79   |      |         | 79   |      | dBFS  |
|         |                                                                    | 5MHz Input                                                            |         | 100  |      |         | 100  |      | dBc   |
|         |                                                                    | 15MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 88   | 100  |         | 88   | 100  | dBc   |
|         |                                                                    | 15MHz Input ●                                                         | 88      | 96   |      | 88      | 99   |      | dBc   |
|         |                                                                    | 30MHz Input                                                           |         | 91   |      |         | 95   |      | dBc   |
|         |                                                                    | 70MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 85   | 96   |         | 85   | 97   | dBc   |
| SFDR    | Spurious Free Dynamic Range<br>4th Harmonic or Higher              | 70MHz Input ●                                                         | 84      | 95   |      | 84      | 97   |      | dBc   |
|         |                                                                    | 140MHz Input                                                          |         | 89   |      |         | 91   |      | dBc   |
|         |                                                                    | 5MHz Input                                                            |         | 105  |      |         | 105  |      | dBc   |
|         |                                                                    | 15MHz Input ●                                                         | 95      | 105  |      | 94      | 105  |      | dBc   |
|         |                                                                    | 30MHz Input                                                           |         | 105  |      |         | 105  |      | dBc   |
|         |                                                                    | 70MHz Input ●                                                         | 94      | 104  |      | 93      | 103  |      | dBc   |
| S/(N+D) | Signal-to-Noise<br>Plus Distortion Ratio                           | 140MHz Input                                                          |         | 100  |      |         | 100  |      | dBc   |
|         |                                                                    | 5MHz Input                                                            |         | 81.5 |      |         | 81.3 |      | dBc   |
|         |                                                                    | 15MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 80.3 | 81.2 |         | 80.2 | 81.1 | dBFS  |
|         |                                                                    | 15MHz Input ●                                                         | 80.2    | 80.8 |      | 80      | 80.7 |      | dBFS  |
|         |                                                                    | 30MHz Input                                                           |         | 80.9 |      |         | 80.8 |      | dBFS  |
|         |                                                                    | 70MHz Input, $T_A = 25^\circ\text{C}$                                 |         | 79.3 | 80.3 |         | 79.6 | 80.4 | dBFS  |
| SFDR    | Spurious Free Dynamic Range<br>at $-25\text{dBFS}$<br>Dither "OFF" | 70MHz Input ●                                                         | 79.2    | 80   |      | 79.4    | 80.1 |      | dBFS  |
|         |                                                                    | 140MHz Input                                                          |         | 78.8 |      |         | 78.8 |      | dBFS  |
|         |                                                                    | 5MHz Input                                                            |         | 105  |      |         | 105  |      | dBFS  |
|         |                                                                    | 15MHz Input                                                           |         | 105  |      |         | 105  |      | dBFS  |
|         |                                                                    | 30MHz Input                                                           |         | 105  |      |         | 105  |      | dBFS  |
|         |                                                                    | 70MHz Input                                                           |         | 105  |      |         | 105  |      | dBFS  |
| SFDR    | Spurious Free Dynamic Range<br>at $-25\text{dBFS}$<br>Dither "ON"  | 140MHz Input                                                          |         | 100  |      |         | 100  |      | dBFS  |
|         |                                                                    | 5MHz Input                                                            |         | 115  |      |         | 115  |      | dBFS  |
|         |                                                                    | 15MHz Input ●                                                         | 100     | 115  |      | 100     | 115  |      | dBFS  |
|         |                                                                    | 30MHz Input                                                           |         | 115  |      |         | 115  |      | dBFS  |
|         |                                                                    | 70MHz Input                                                           |         | 115  |      |         | 115  |      | dBFS  |
|         |                                                                    | 140MHz Input                                                          |         | 110  |      |         | 110  |      | dBFS  |
| IMD     | Intermodulation Distortion                                         | $f_{IN1} = 14\text{MHz}$ , $f_{IN2} = 21\text{MHz}$ , $-7\text{dBFS}$ |         | 100  |      |         | 100  |      | dBc   |
|         |                                                                    | $f_{IN1} = 67\text{MHz}$ , $f_{IN2} = 74\text{MHz}$ , $-7\text{dBFS}$ |         | 96   |      |         | 97   |      | dBc   |

## COMMON MODE BIAS CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| PARAMETER                  | CONDITIONS                                     |   | MIN   | TYP   | MAX   | UNITS    |
|----------------------------|------------------------------------------------|---|-------|-------|-------|----------|
| $V_{CM}$ Output Voltage    | $I_{OUT} = 0$                                  | ● | 1.475 | 1.575 | 1.675 | V        |
| $V_{CM}$ Output Tempco     | $I_{OUT} = 0$                                  |   |       | ±60   |       | ppm/°C   |
| $V_{CM}$ Line Regulation   | $3.135\text{V} \leq V_{DD} \leq 3.465\text{V}$ |   |       | 2.4   |       | mV/V     |
| $V_{CM}$ Output Resistance | $ I_{OUT}  \leq 0.8\text{mA}$                  |   |       | 1.1   |       | $\Omega$ |

## DIGITAL INPUTS AND DIGITAL OUTPUTS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL                                                  | PARAMETER                  | CONDITIONS                                |   | MIN | TYP | MAX | UNITS      |
|---------------------------------------------------------|----------------------------|-------------------------------------------|---|-----|-----|-----|------------|
| <b>Encode Inputs (ENC<sup>+</sup>, ENC<sup>-</sup>)</b> |                            |                                           |   |     |     |     |            |
| $V_{ID}$                                                | Differential Input Voltage | (Note 7)                                  | ● | 0.2 |     |     | V          |
| $V_{ICM}$                                               | Common Mode Input Voltage  | Internally Set<br>Externally Set (Note 7) |   | 1.2 | 1.6 | 3   | V<br>V     |
| $R_{IN}$                                                | Input Resistance           | (See Figure 2)                            |   |     | 6   |     | k $\Omega$ |
| $C_{IN}$                                                | Input Capacitance          | (Note 7)                                  |   |     | 3   |     | pF         |

### Logic Inputs

|          |                           |                                  |   |   |     |     |               |
|----------|---------------------------|----------------------------------|---|---|-----|-----|---------------|
| $V_{IH}$ | High Level Input Voltage  | $V_{DD} = 3.3\text{V}$           | ● | 2 |     |     | V             |
| $V_{IL}$ | Low Level Input Voltage   | $V_{DD} = 3.3\text{V}$           | ● |   |     | 0.8 | V             |
| $I_{IN}$ | Digital Input Current     | $V_{IN} = 0\text{V}$ to $V_{DD}$ | ● |   |     | ±10 | $\mu\text{A}$ |
| $C_{IN}$ | Digital Input Capacitance | (Note 7)                         |   |   | 1.5 |     | pF            |

### LOGIC OUTPUTS (CMOS MODE)

#### $OV_{DD} = 3.3\text{V}$

|              |                           |                         |                                                   |   |     |               |        |
|--------------|---------------------------|-------------------------|---------------------------------------------------|---|-----|---------------|--------|
| $V_{OH}$     | High Level Output Voltage | $V_{DD} = 3.3\text{V}$  | $I_O = -10\mu\text{A}$<br>$I_O = -200\mu\text{A}$ | ● | 3.1 | 3.299<br>3.29 | V<br>V |
| $V_{OL}$     | Low Level Output Voltage  | $V_{DD} = 3.3\text{V}$  | $I_O = 160\mu\text{A}$<br>$I_O = 1.6\text{mA}$    | ● |     | 0.01<br>0.10  | V<br>V |
| $I_{SOURCE}$ | Output Source Current     | $V_{OUT} = 0\text{V}$   |                                                   |   |     | -50           | mA     |
| $I_{SINK}$   | Output Sink Current       | $V_{OUT} = 3.3\text{V}$ |                                                   |   |     | 50            | mA     |

#### $OV_{DD} = 2.5\text{V}$

|          |                           |                        |                         |  |  |      |   |
|----------|---------------------------|------------------------|-------------------------|--|--|------|---|
| $V_{OH}$ | High Level Output Voltage | $V_{DD} = 3.3\text{V}$ | $I_O = -200\mu\text{A}$ |  |  | 2.49 | V |
| $V_{OL}$ | Low Level Output Voltage  | $V_{DD} = 3.3\text{V}$ | $I_O = 1.60\text{mA}$   |  |  | 0.1  | V |

#### $OV_{DD} = 1.8\text{V}$

|          |                           |                        |                         |  |  |      |   |
|----------|---------------------------|------------------------|-------------------------|--|--|------|---|
| $V_{OH}$ | High Level Output Voltage | $V_{DD} = 3.3\text{V}$ | $I_O = -200\mu\text{A}$ |  |  | 1.79 | V |
| $V_{OL}$ | Low Level Output Voltage  | $V_{DD} = 3.3\text{V}$ | $I_O = 1.60\text{mA}$   |  |  | 0.1  | V |

### LOGIC OUTPUTS (LVDS MODE)

#### STANDARD LVDS

|          |                             |                                |   |       |     |       |    |
|----------|-----------------------------|--------------------------------|---|-------|-----|-------|----|
| $V_{OD}$ | Differential Output Voltage | 100 $\Omega$ Differential Load | ● | 247   | 350 | 454   | mV |
| $V_{OS}$ | Output Common Mode Voltage  | 100 $\Omega$ Differential Load | ● | 1.125 | 1.2 | 1.375 | V  |

#### Low Power LVDS

|          |                             |                                |   |       |     |       |    |
|----------|-----------------------------|--------------------------------|---|-------|-----|-------|----|
| $V_{OD}$ | Differential Output Voltage | 100 $\Omega$ Differential Load | ● | 125   | 175 | 250   | mV |
| $V_{OS}$ | Output Common Mode Voltage  | 100 $\Omega$ Differential Load | ● | 1.125 | 1.2 | 1.375 | V  |

22165f

# LTC2216/LTC2215

## POWER REQUIREMENTS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $A_{IN} = -1\text{dBFS}$  unless otherwise noted. (Note 4)

| SYMBOL     | PARAMETER             | CONDITIONS      |   | LTC2215 |     |       | LTC2216 |     |       | UNITS |
|------------|-----------------------|-----------------|---|---------|-----|-------|---------|-----|-------|-------|
|            |                       |                 |   | MIN     | TYP | MAX   | MIN     | TYP | MAX   |       |
| $V_{DD}$   | Analog Supply Voltage | (Note 8)        | ● | 3.135   | 3.3 | 3.465 | 3.135   | 3.3 | 3.465 | V     |
| $P_{SHDN}$ | Shutdown Power        | $SHDN = V_{DD}$ |   | 17      |     |       | 17      |     |       | mW    |

### Standard LVDS Output Mode

|            |                       |          |   |     |     |     |      |     |     |    |
|------------|-----------------------|----------|---|-----|-----|-----|------|-----|-----|----|
| $OV_{DD}$  | Output Supply Voltage | (Note 8) | ● | 3   | 3.3 | 3.6 | 3    | 3.3 | 3.6 | V  |
| $I_{VDD}$  | Analog Supply Current |          | ● | 217 |     |     | 300  |     |     | mA |
| $I_{OVDD}$ | Output Supply Current |          | ● | 75  |     |     | 75   |     |     | mA |
| $P_{DIS}$  | Power Dissipation     |          | ● | 964 |     |     | 1240 |     |     | mW |

### Low Power LVDS Output Mode

|            |                       |          |   |     |     |     |      |     |     |    |
|------------|-----------------------|----------|---|-----|-----|-----|------|-----|-----|----|
| $OV_{DD}$  | Output Supply Voltage | (Note 8) | ● | 3   | 3.3 | 3.6 | 3    | 3.3 | 3.6 | V  |
| $I_{VDD}$  | Analog Supply Current |          | ● | 215 |     |     | 298  |     |     | mA |
| $I_{OVDD}$ | Output Supply Current |          | ● | 42  |     |     | 42   |     |     | mA |
| $P_{DIS}$  | Power Dissipation     |          | ● | 848 |     |     | 1120 |     |     | mW |

### CMOS Output Mode

|           |                       |          |   |     |  |  |     |  |  |    |
|-----------|-----------------------|----------|---|-----|--|--|-----|--|--|----|
| $OV_{DD}$ | Output Supply Voltage | (Note 8) | ● | 0.5 |  |  | 0.5 |  |  | V  |
| $I_{VDD}$ | Analog Supply Current |          | ● | 212 |  |  | 295 |  |  | mA |
| $P_{DIS}$ | Power Dissipation     |          | ● | 700 |  |  | 970 |  |  | mW |

## TIMING CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . (Note 4)

| SYMBOL | PARAMETER          | CONDITIONS                         |   | LTC2215 |       |     | LTC2216 |      |     | UNITS |
|--------|--------------------|------------------------------------|---|---------|-------|-----|---------|------|-----|-------|
|        |                    |                                    |   | MIN     | TYP   | MAX | MIN     | TYP  | MAX |       |
| $f_S$  | Sampling Frequency | (Note 8)                           | ● | 1       |       | 65  | 1       |      | 80  | MHz   |
| $t_L$  | ENC Low Time       | Duty Cycle Stabilizer Off (Note 7) | ● | 7.31    | 7.692 | 500 | 5.94    | 6.25 | 500 | ns    |
|        |                    | Duty Cycle Stabilizer On (Note 7)  | ● | 5       | 7.692 | 500 | 4.06    | 6.25 | 500 | ns    |
| $t_H$  | ENC High Time      | Duty Cycle Stabilizer Off (Note 7) | ● | 7.31    | 7.692 | 500 | 5.94    | 6.25 | 500 | ns    |
|        |                    | Duty Cycle Stabilizer On (Note 7)  | ● | 5       | 7.692 | 500 | 4.06    | 6.25 | 500 | ns    |

### LVDS Output Mode (Standard and Low Power)

|              |                     |                        |   |      |     |     |      |     |     |        |
|--------------|---------------------|------------------------|---|------|-----|-----|------|-----|-----|--------|
| $t_D$        | ENC to DATA Delay   | (Note 7)               | ● | 1.3  | 2.5 | 3.8 | 1.3  | 2.5 | 3.8 | ns     |
| $t_C$        | ENC to CLKOUT Delay | (Note 7)               | ● | 1.3  | 2.5 | 3.8 | 1.3  | 2.5 | 3.8 | ns     |
| $t_{SKEW}$   | DATA to CLKOUT Skew | $(t_C - t_D)$ (Note 7) | ● | -0.6 | 0   | 0.6 | -0.6 | 0   | 0.6 | ns     |
| $t_{RISE}$   | Output Rise Time    |                        |   | 0.5  |     |     | 0.5  |     |     | ns     |
| $t_{FALL}$   | Output Fall Time    |                        |   | 0.5  |     |     | 0.5  |     |     | ns     |
| Data Latency | Data Latency        |                        |   | 7    |     |     | 7    |     |     | Cycles |

### CMOS Output Mode

|              |                     |                        |   |      |     |     |      |     |     |        |
|--------------|---------------------|------------------------|---|------|-----|-----|------|-----|-----|--------|
| $t_D$        | ENC to DATA Delay   | (Note 7)               | ● | 1.3  | 2.7 | 4   | 1.3  | 2.7 | 4   | ns     |
| $t_C$        | ENC to CLKOUT Delay | (Note 7)               | ● | 1.3  | 2.7 | 4   | 1.3  | 2.7 | 4   | ns     |
| $t_{SKEW}$   | DATA to CLKOUT Skew | $(t_C - t_D)$ (Note 7) | ● | -0.6 | 0   | 0.6 | -0.6 | 0   | 0.6 | ns     |
| Data Latency | Data Latency        | Full Rate CMOS Demuxed |   | 7    |     |     | 7    |     |     | Cycles |

## ELECTRICAL CHARACTERISTICS

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** All voltage values are with respect to GND, with GND and OGND shorted (unless otherwise noted).

**Note 3:** When these pin voltages are taken below GND or above  $V_{DD}$ , they will be clamped by internal diodes. This product can handle input currents of greater than 100mA below GND or above  $V_{DD}$  without latchup.

**Note 4:**  $V_{DD} = 3.3V$ ,  $f_{SAMPLE} = 65MHz$  (LTC2215) or 80MHz (LTC2216), LVDS outputs, differential  $ENC^+/ENC^- = 2V_{P-P}$  sine wave with 1.6V common mode, input range =  $2.75V_{P-P}$  with differential drive, unless otherwise specified.

**Note 5:** Integral nonlinearity is defined as the deviation of a code from a “best fit straight line” to the transfer curve. The deviation is measured from the center of the quantization band.


**Note 6:** Offset error is the offset voltage measured from  $-1/2LSB$  when the output code flickers between 0000 0000 0000 0000 and 1111 1111 1111 1111 in 2’s complement output mode.

**Note 7:** Guaranteed by design, not subject to test.

**Note 8:** Recommended operating conditions.

## TIMING DIAGRAM


**LVDS Output Mode Timing**  
All Outputs are Differential and Have LVDS Levels

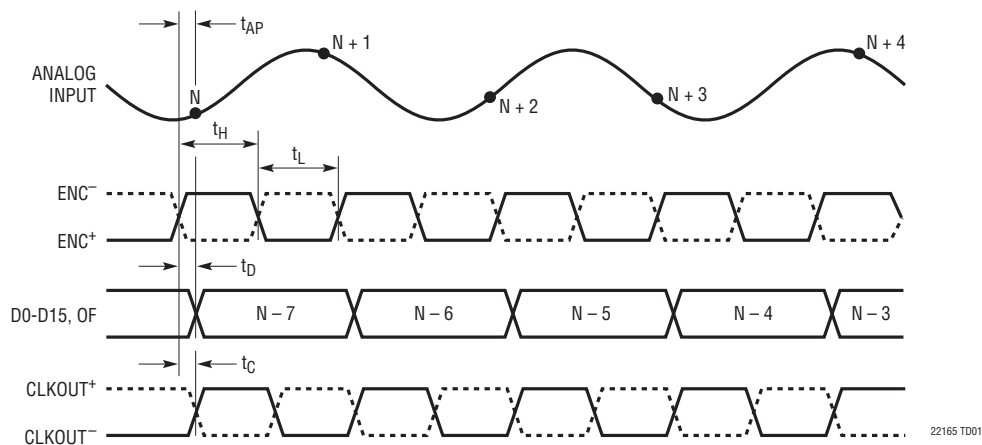


22165 TD01

TIMING DIAGRAMS

Full-Rate CMOS Output Mode Timing  
All Outputs are Single-Ended and Have CMOS Levels

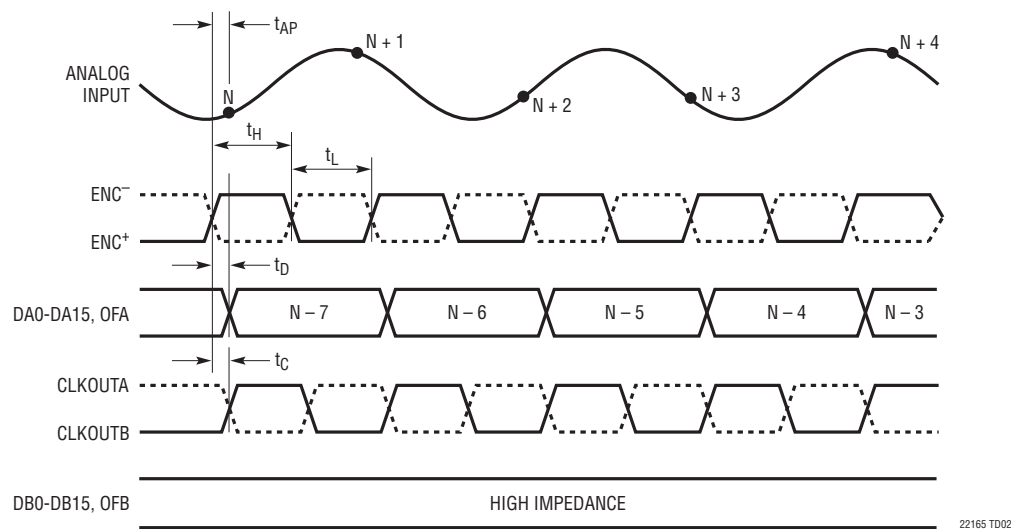


Demultiplexed CMOS Output Mode Timing  
All Outputs are Single-Ended and Have CMOS Levels

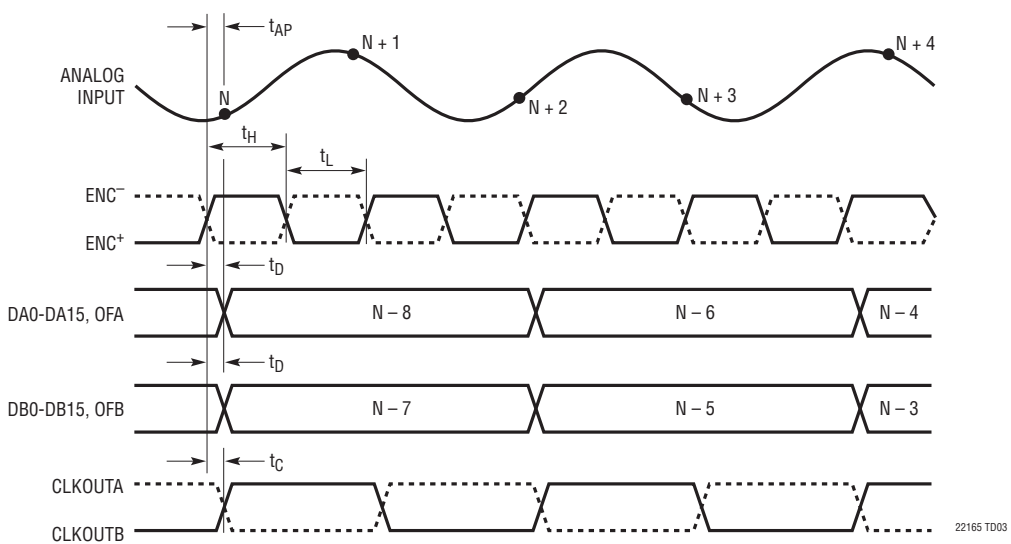


## TYPICAL PERFORMANCE CHARACTERISTICS

LTC2216 Integral Nonlinearity (INL) vs Output Code, Dither "Off"

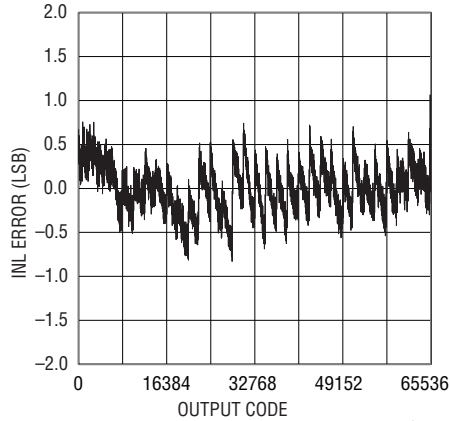


22165 G01

LTC2216 Integral Nonlinearity (INL) vs Output Code, Dither "On"

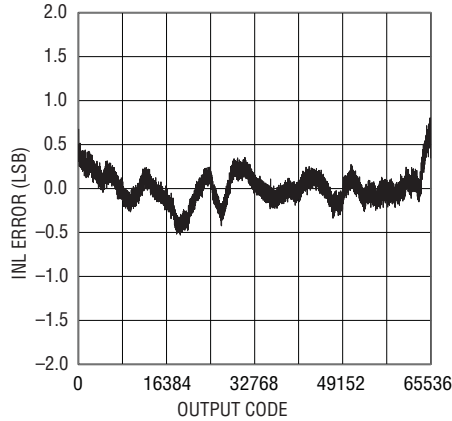


22165 G02

LTC2216 Differential Nonlinearity (DNL) vs Output Code

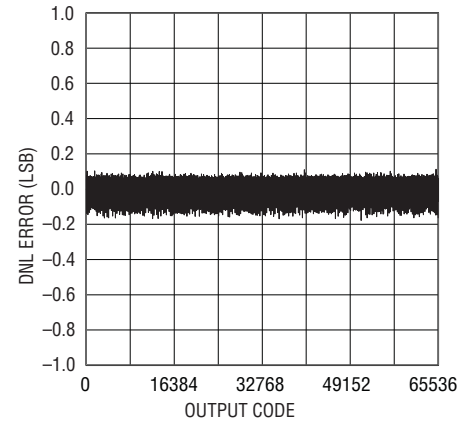


22165 G03


LTC2216 AC Grounded Input Histogram

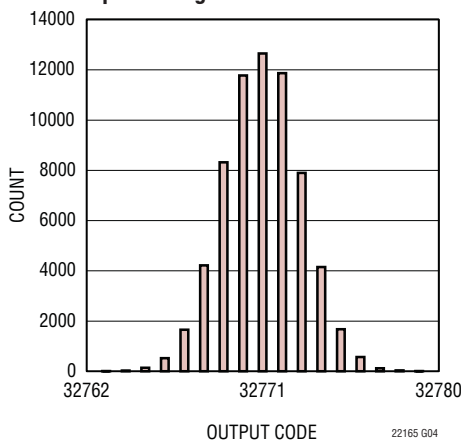


22165 G04

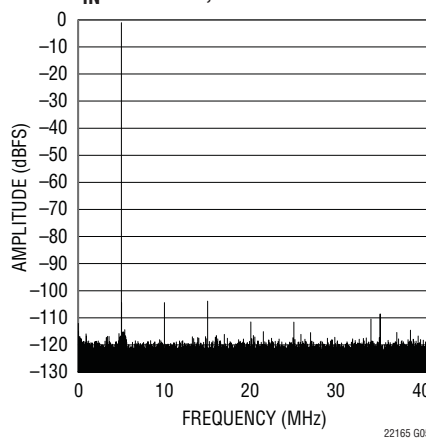LTC2216 64k Point FFT,  $f_{IN} = 4.9\text{MHz}$ , -1dBFS


22165 G05

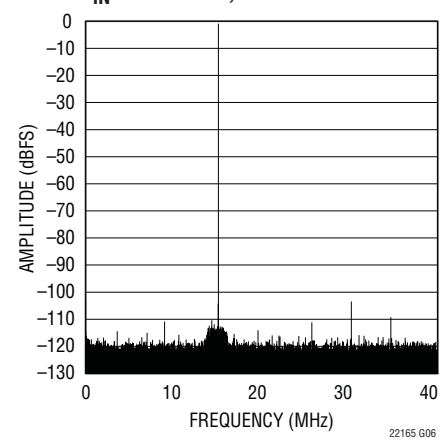LTC2216 64k Point FFT,  $f_{IN} = 15.1\text{MHz}$ , -1dBFS


22165 G06

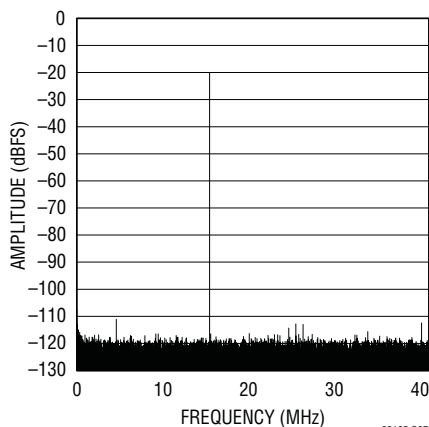LTC2216 64k Point FFT,  $f_{IN} = 15.1\text{MHz}$ , -20dBFS, Dither "Off"

22165 G07

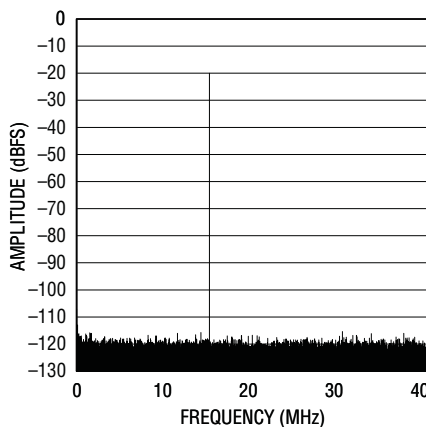LTC2216 64k Point FFT,  $f_{IN} = 15.1\text{MHz}$ , -20dBFS, Dither "On"

22165 G08

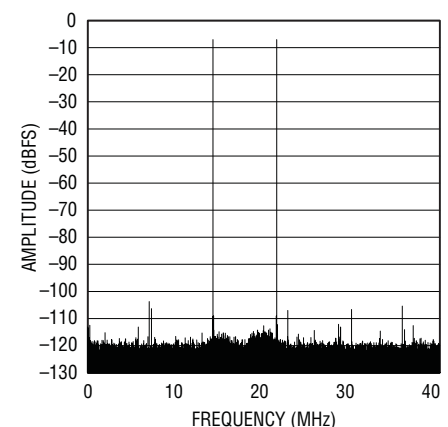
LTC2216 64k Point 2-Tone FFT,  $f_{IN} = 14.25\text{MHz}$  and  $21.5\text{MHz}$ , -7dBFS

22165 G09


22165f

## TYPICAL PERFORMANCE CHARACTERISTICS


LTC2216 64k Point 2-Tone FFT,  
 $f_{IN} = 14.25\text{MHz}$  and  $21.5\text{MHz}$ ,  
-25dBFS, Dither "On"

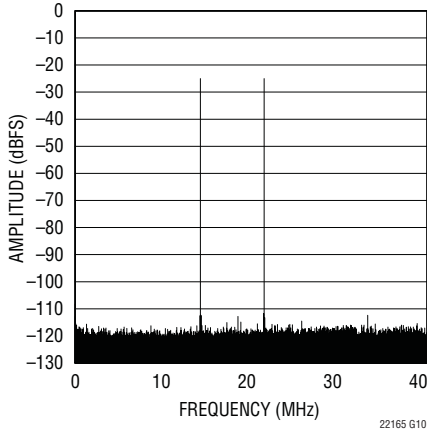


LTC2216 SFDR vs Input Level,  
 $f_{IN} = 15.2\text{MHz}$ , Dither "Off"

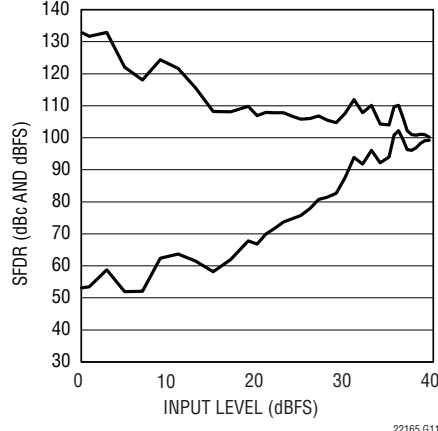


LTC2216 SFDR vs Input Level,  
 $f_{IN} = 15.2\text{MHz}$ , Dither "On"

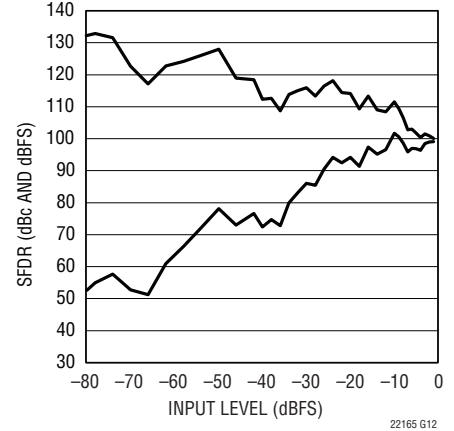


LTC2216 SNR vs Input Level,  
 $f_{IN} = 15.2\text{MHz}$

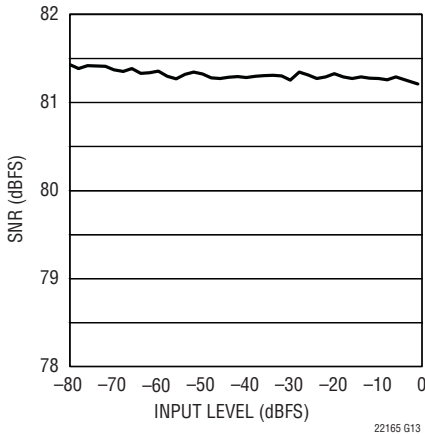


LTC2216 64k Point FFT,  
 $f_{IN} = 28.7\text{MHz}$ , -1dBFS

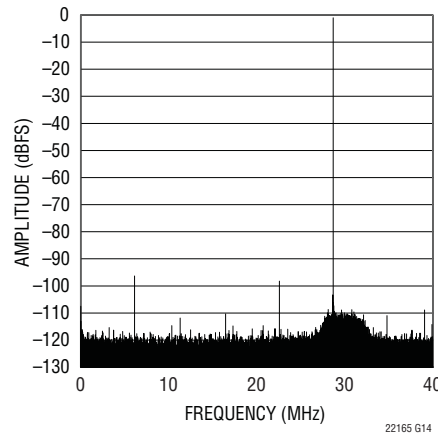


LTC2216 64k Point FFT,  
 $f_{IN} = 70.2\text{MHz}$ , -1dBFS

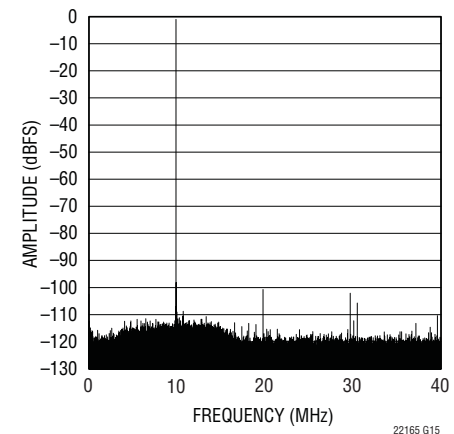


LTC2216 64k Point FFT,  
 $f_{IN} = 70.1\text{MHz}$ , -20dBFS, Dither "Off"

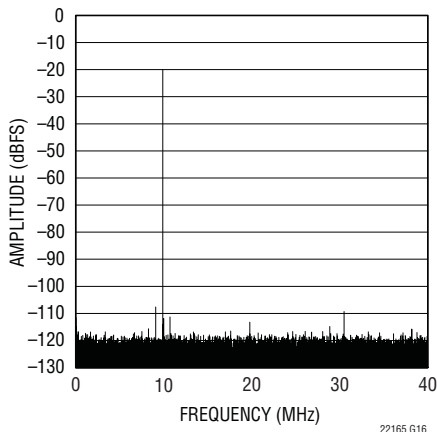

LTC2216 64k Point FFT,  
 $f_{IN} = 70.1\text{MHz}$ , -20dBFS, Dither "On"

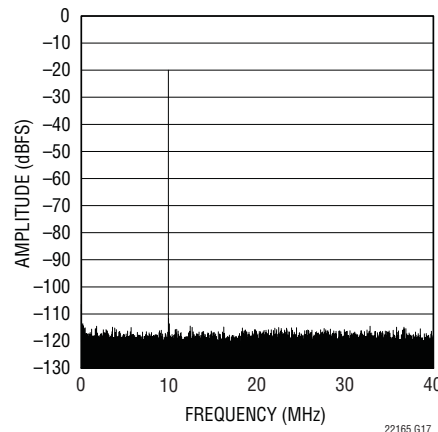


LTC2216 SFDR vs Input Level,  
 $f_{IN} = 70.5\text{MHz}$ , Dither "Off"

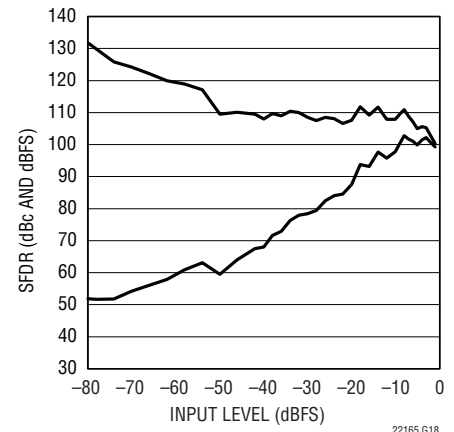


## TYPICAL PERFORMANCE CHARACTERISTICS


LTC2216 SFDR vs Input Level,  
 $f_{IN} = 70.5\text{MHz}$ , Dither "On"

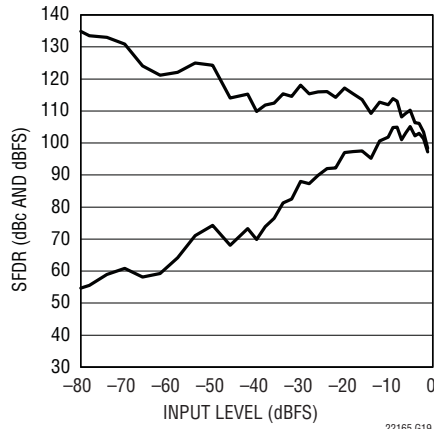


LTC2216 SNR vs Input Level,  
 $f_{IN} = 70.5\text{MHz}$

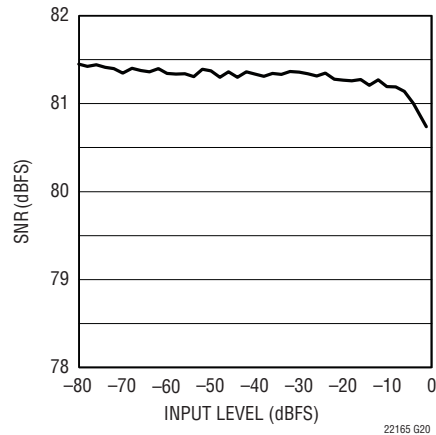


LTC2216 64k Point 2-Tone FFT,  
 $f_{IN} = 67.2\text{MHz}$  and  $74.4\text{MHz}$ ,  
 $-7\text{dBFS}$

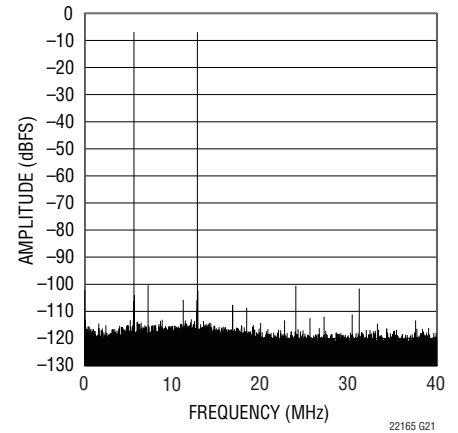


LTC2216 64k Point 2-Tone FFT,  
 $f_{IN} = 67.2\text{MHz}$  and  $74.4\text{MHz}$ ,  
 $-25\text{dBFS}$ , Dither "On"

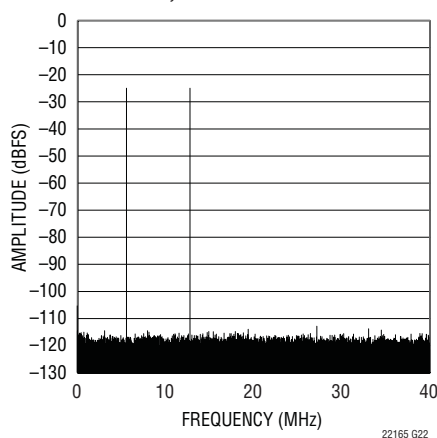


LTC2216 64k Point FFT,  
 $f_{IN} = 140.5\text{MHz}$ ,  $-1\text{dBFS}$

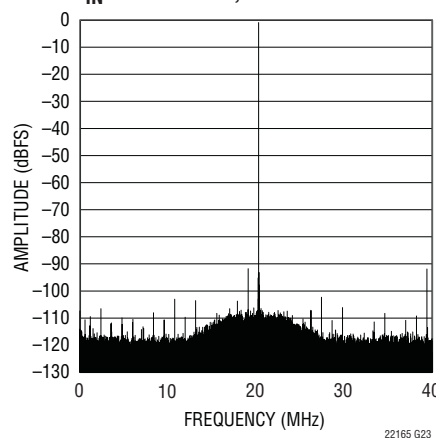


LTC2216 64k Point FFT,  
 $f_{IN} = 140.1\text{MHz}$ ,  $-20\text{dBFS}$ , Dither "On"

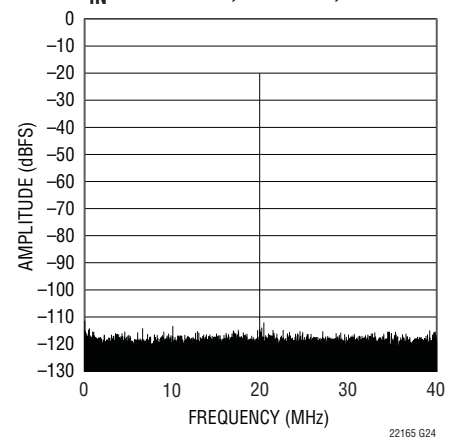


LTC2216 SFDR vs Input Level,  
 $f_{IN} = 140.5\text{MHz}$ , Dither "Off"

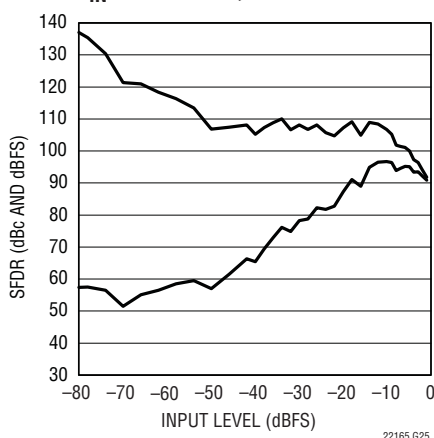








LTC2216 SFDR vs Input Level,  
 $f_{IN} = 140.5\text{MHz}$ , Dither "On"

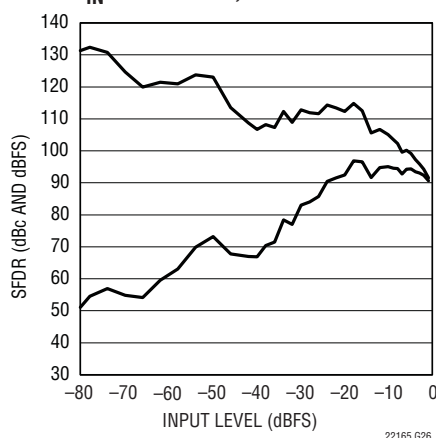

LTC2216 SNR vs Input Level,  
 $f_{IN} = 140.5\text{MHz}$

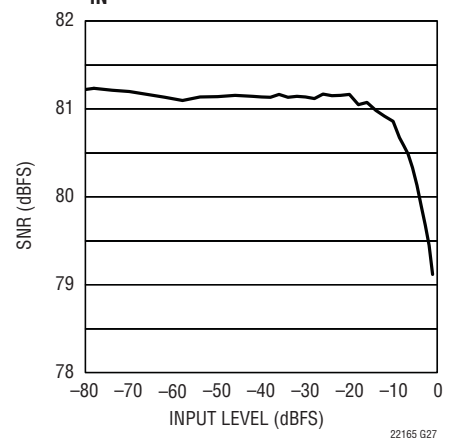


## TYPICAL PERFORMANCE CHARACTERISTICS

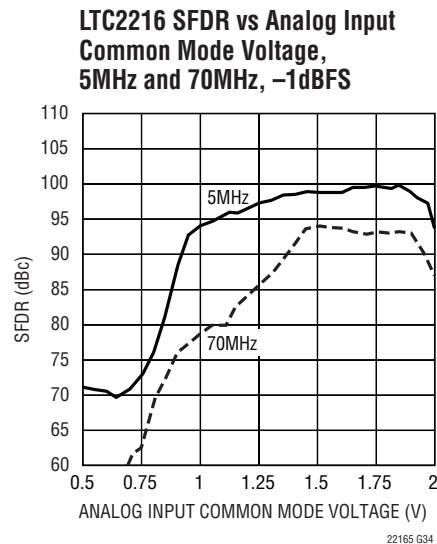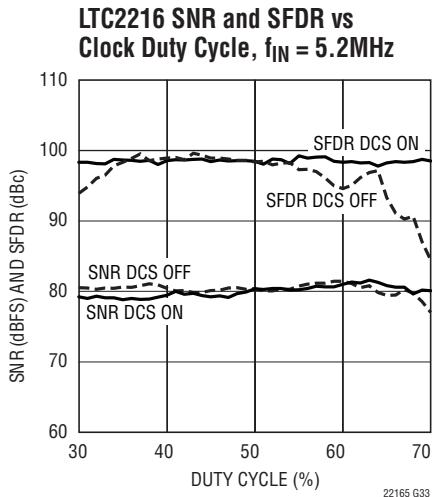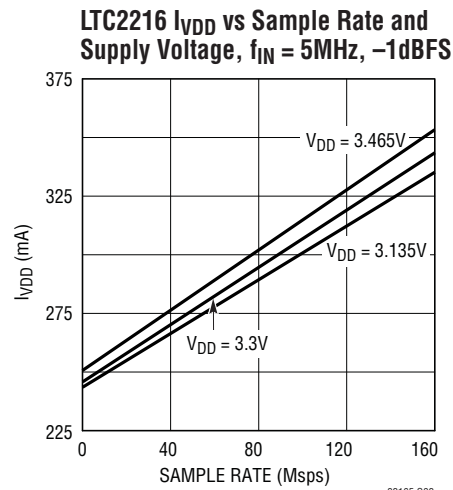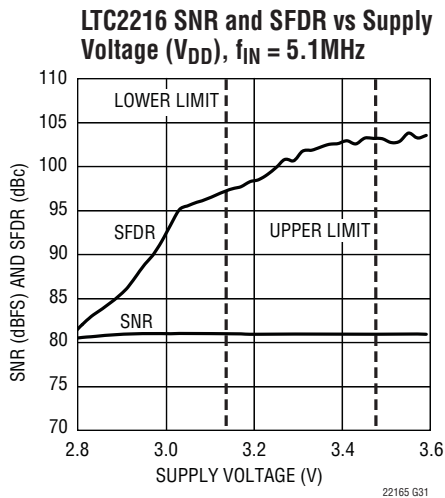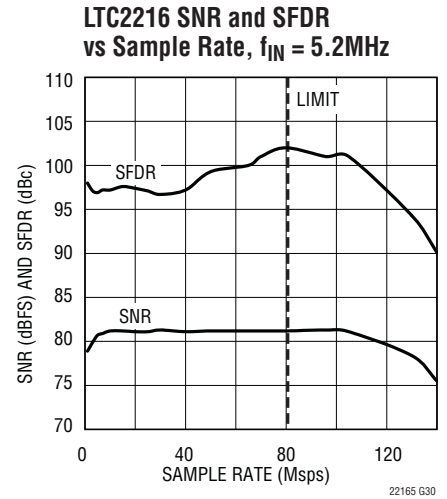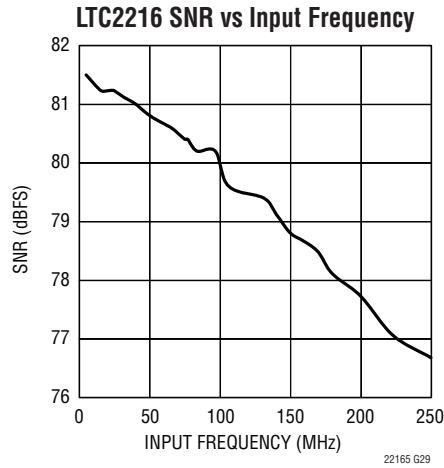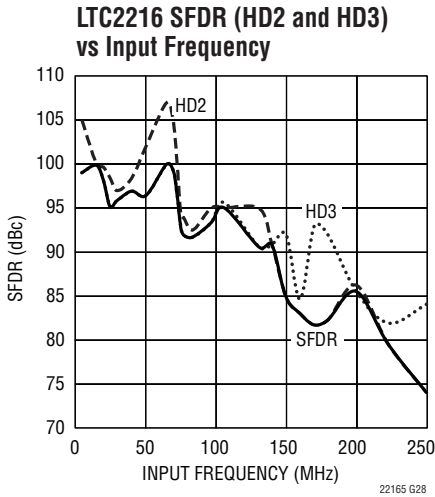


## TYPICAL PERFORMANCE CHARACTERISTICS

LTC2215 Integral Nonlinearity (INL) vs Output Code, Dither "Off"

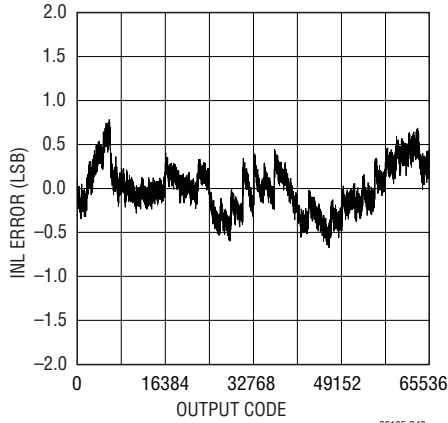


22165 G42

LTC2215 Integral Nonlinearity (INL) vs Output Code, Dither "On"

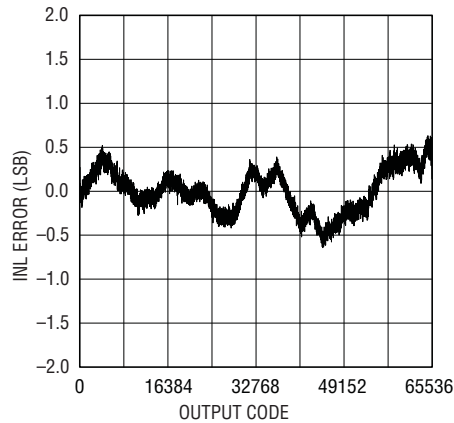


22165 G43

LTC2215 Differential Nonlinearity (DNL) vs Output Code

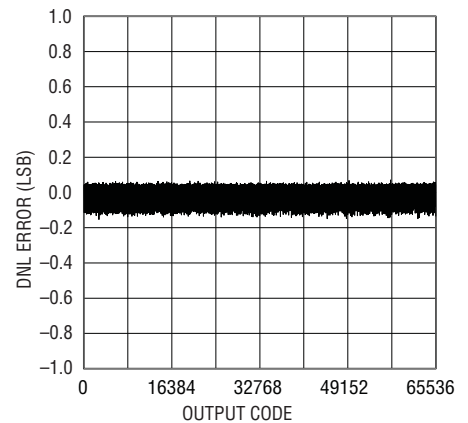


22165 G44


LTC2215 AC Grounded Input Histogram

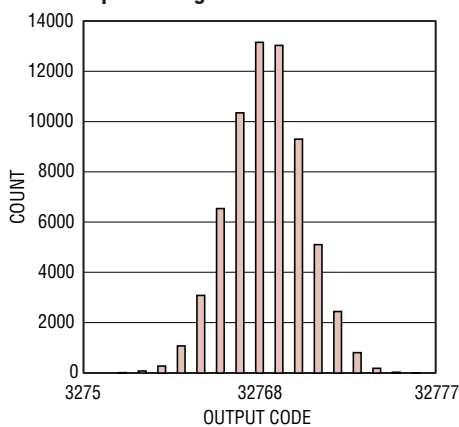


22165 G45

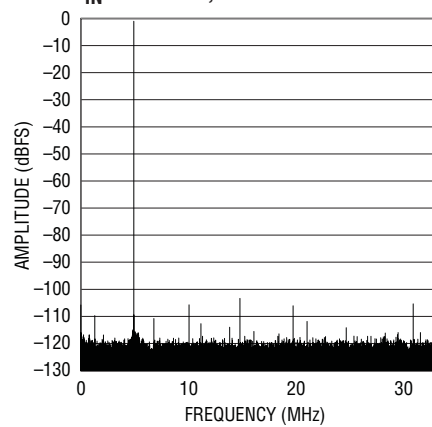LTC2215 64k Point FFT,  $f_{IN} = 4.9\text{MHz}$ , -1dBFS


22165 G46

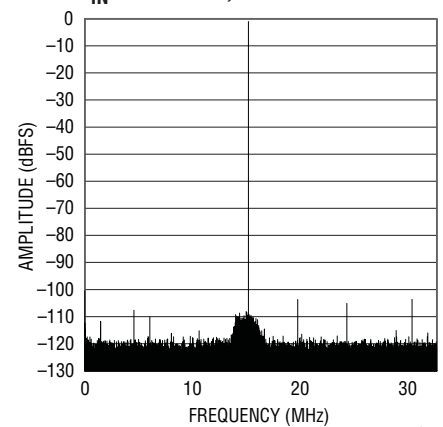LTC2215 64k Point FFT,  $f_{IN} = 15.1\text{MHz}$ , -1dBFS


22165 G47

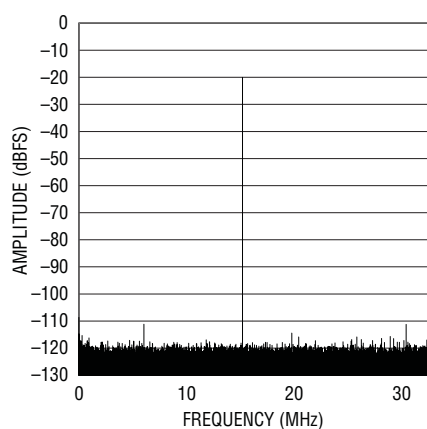LTC2215 64k Point FFT,  $f_{IN} = 15.1\text{MHz}$ , -20dBFS, Dither "Off"

22165 G48

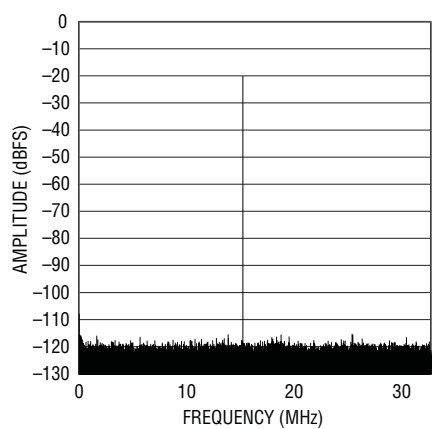LTC2215 64k Point FFT,  $f_{IN} = 15.1\text{MHz}$ , -20dBFS, Dither "On"

22165 G49

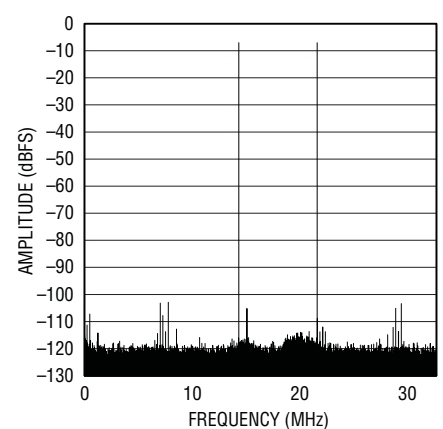
LTC2215 64k Point 2-Tone FFT,  $f_{IN} = 14.25\text{MHz}$  and  $21.5\text{MHz}$ , -7dBFS

22165 G50


22165f

## TYPICAL PERFORMANCE CHARACTERISTICS


LTC2215 64k Point 2-Tone FFT,  
 $f_{IN} = 14.25\text{MHz}$  and  $21.5\text{MHz}$ ,  
-25dBFS, Dither "On"

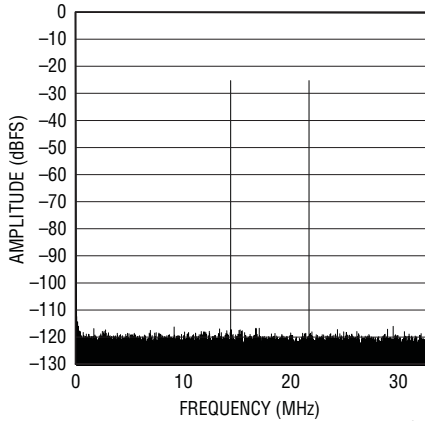


LTC2215 SFDR vs Input Level,  
 $f_{IN} = 15.2\text{MHz}$ , Dither "Off"

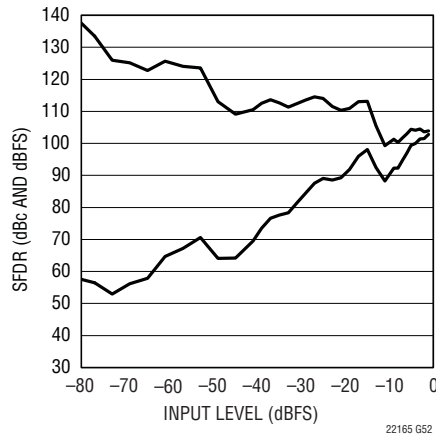


LTC2215 SFDR vs Input Level,  
 $f_{IN} = 15.2\text{MHz}$ , Dither "On"

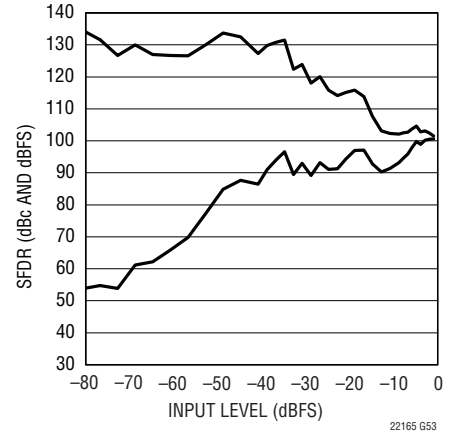


LTC2215 SNR vs Input Level,  
 $f_{IN} = 15.2\text{MHz}$

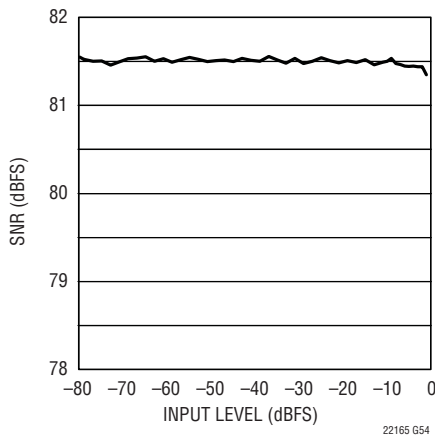


LTC2215 64k Point FFT,  
 $f_{IN} = 28.7\text{MHz}$ , -1dBFS

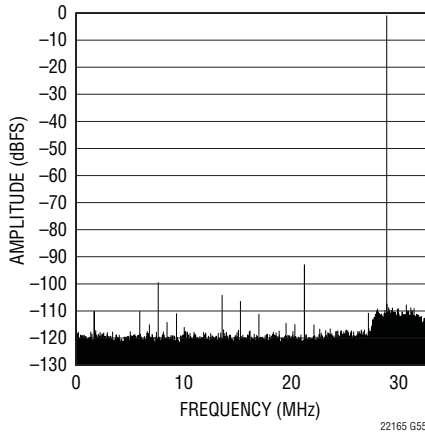


LTC2215 64k Point FFT,  
 $f_{IN} = 70.2\text{MHz}$ , -1dBFS

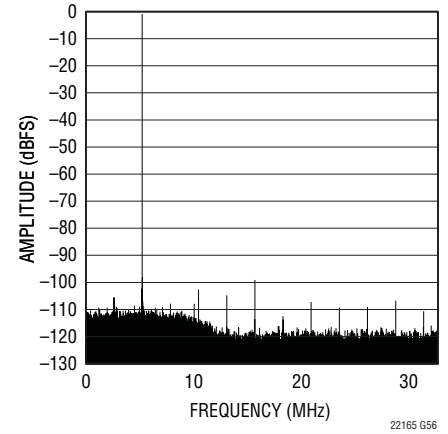


LTC2215 64k Point FFT,  
 $f_{IN} = 70.1\text{MHz}$ , -20dBFS,  
Dither "Off"

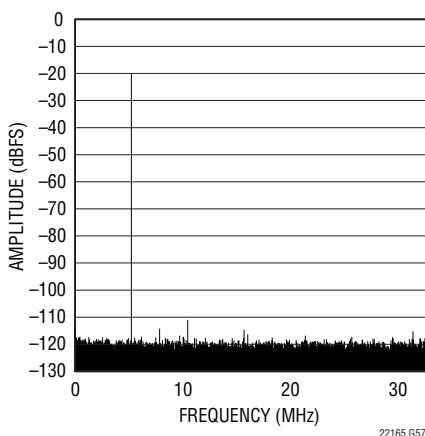

LTC2215 64k Point FFT,  
 $f_{IN} = 70.1\text{MHz}$ , -20dBFS,  
Dither "On"

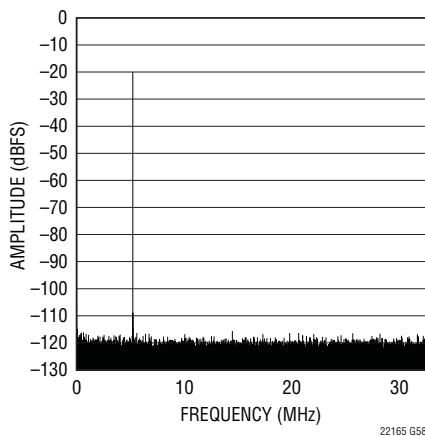


LTC2215 SFDR vs Input Level,  
 $f_{IN} = 70.5\text{MHz}$ , Dither "Off"

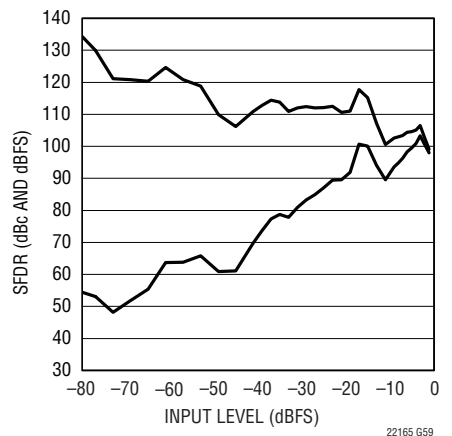


## TYPICAL PERFORMANCE CHARACTERISTICS


LTC2215 SFDR vs Input Level,  
 $f_{IN} = 70.5\text{MHz}$ , Dither "On"

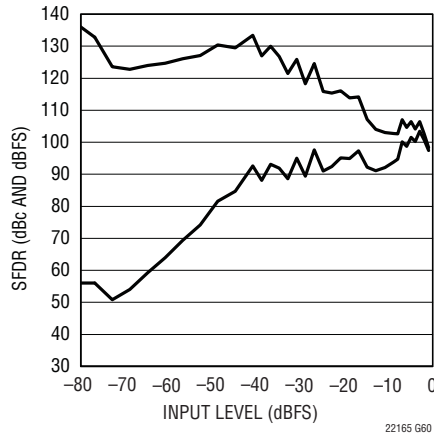


LTC2215 SNR vs Input Level,  
 $f_{IN} = 70.5\text{MHz}$

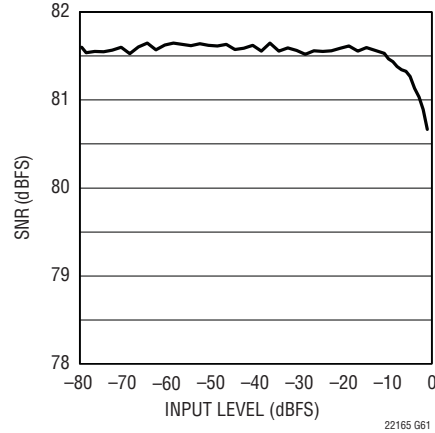


LTC2215 64k Point 2-Tone FFT,  $f_{IN} = 67.2\text{MHz}$  and  $74.4\text{MHz}$ , -7dBFS

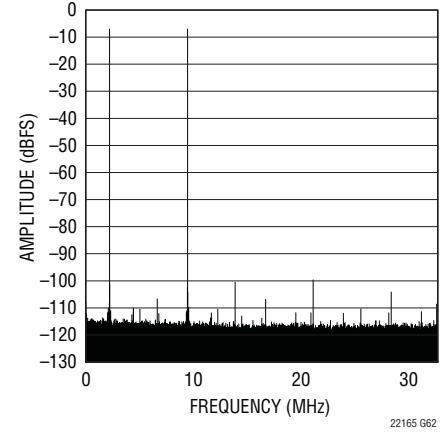


LTC2215 64k Point 2-Tone FFT,  
 $f_{IN} = 67.2\text{MHz}$  and  $74.4\text{MHz}$ ,  
 -25dBFS, Dither "On"

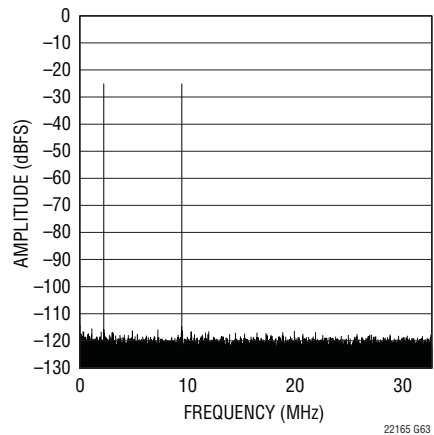


LTC2215 64k Point FFT,  
 $f_{IN} = 140.5\text{MHz}$ , -1dBFS

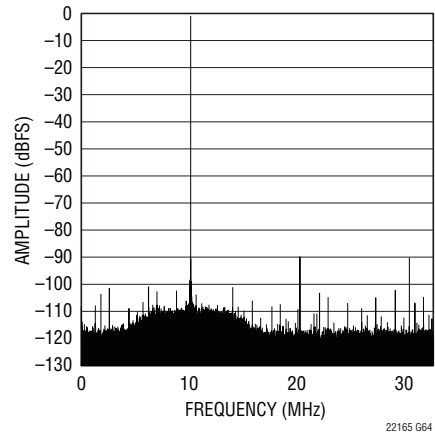


LTC2215 64k Point FFT,  
 $f_{IN} = 140.1\text{MHz}$ , -20dBFS,  
 Dither "On"

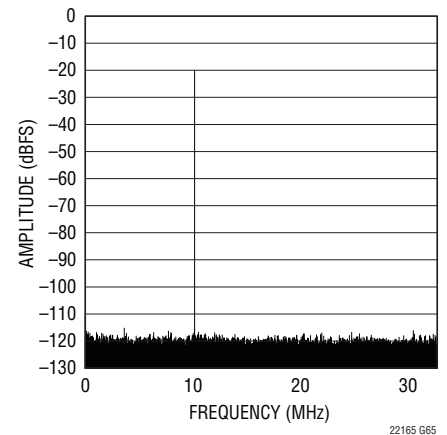


LTC2215 SFDR vs Input Level,  
 $f_{IN} = 140.5\text{MHz}$ , Dither "Off"

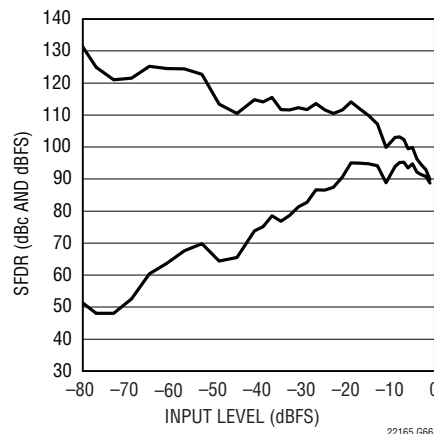

LTC2215 SFDR vs Input Level,  
 $f_{IN} = 140.5\text{MHz}$ , Dither "On"

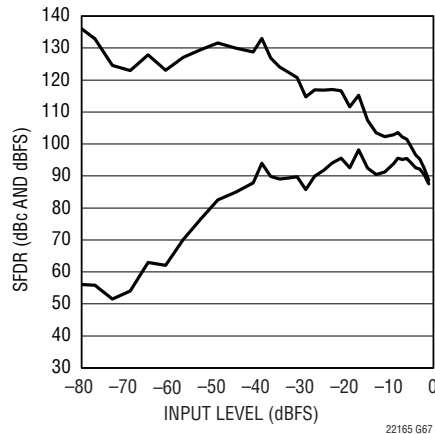


LTC2215 SNR vs Input Level,  
 $f_{IN} = 140.5\text{MHz}$

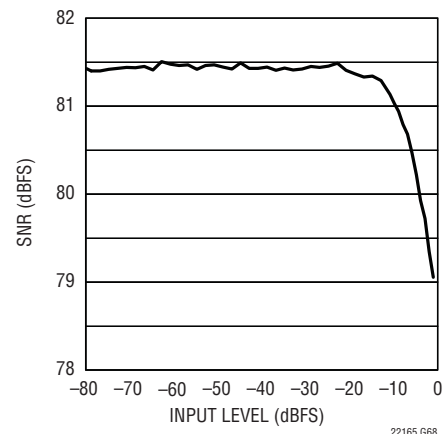


## TYPICAL PERFORMANCE CHARACTERISTICS


**LTC2215 SFDR (HD2 and HD3)  
vs Input Frequency**

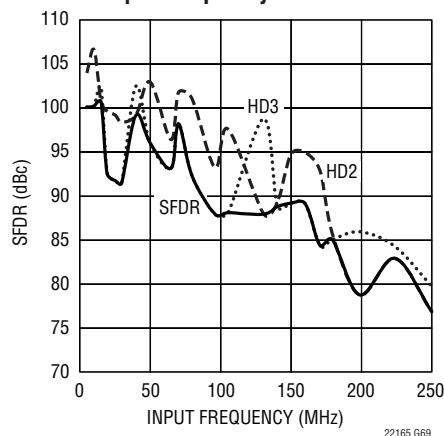


**LTC2215 SNR vs Input Frequency**

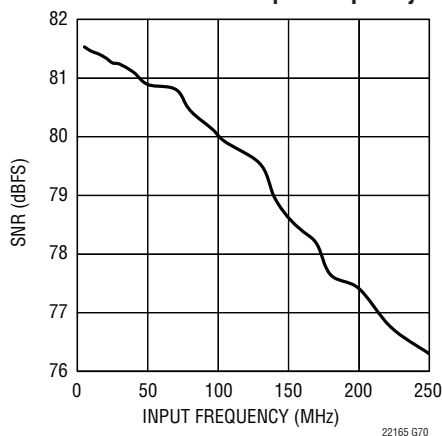


**LTC2215 SNR and SFDR  
vs Sample Rate,  $f_{IN} = 5.2\text{MHz}$**

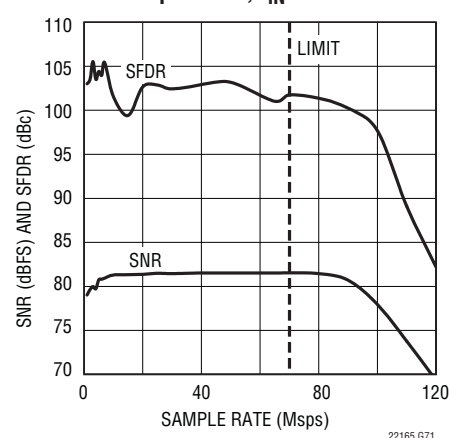


**LTC2215 SNR and SFDR vs Supply  
Voltage ( $V_{DD}$ ),  $f_{IN} = 5.1\text{MHz}$**

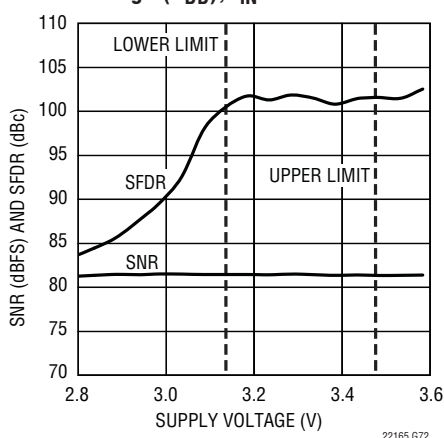


**LTC2215  $I_{VDD}$  vs Sample Rate and  
Supply Voltage,  $f_{IN} = 5\text{MHz}$ ,  $-1\text{dBFS}$**

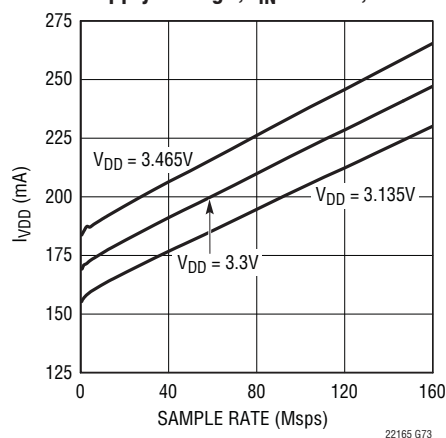

**LTC2215 SNR and SFDR vs  
Clock Duty Cycle,  $f_{IN} = 5.2\text{MHz}$**

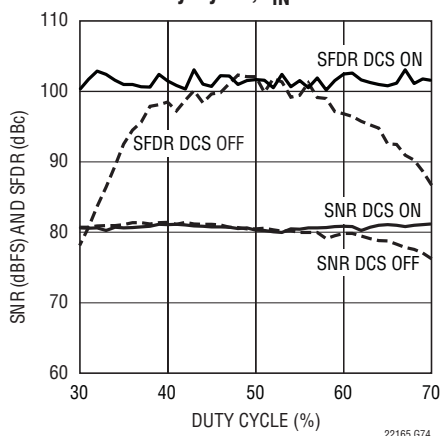


**LTC2215 SFDR vs Analog Input  
Common Mode Voltage, 5MHz  
and 70MHz,  $-1\text{dBFS}$**

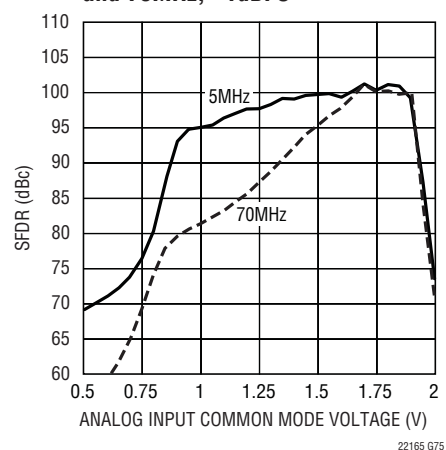


# TYPICAL PERFORMANCE CHARACTERISTICS


**LTC2216/LTC2215 Normalized Full-Scale vs Temperature, Internal Reference, 5 Units**

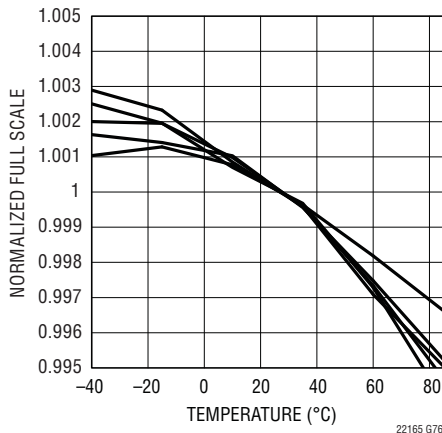


**LTC2216/LTC2215 Input Offset Voltage vs Temperature, Internal Reference, 5 Units**

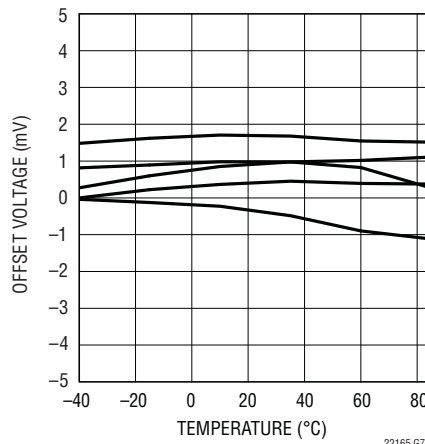


**LTC2216/LTC2215 Normalized Full-Scale vs Temperature, External Reference, 5 Units**

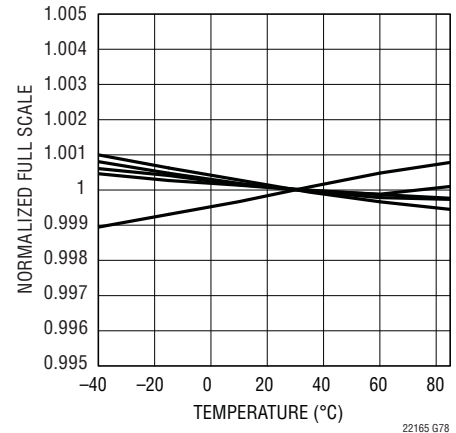


**LTC2216/LTC2215 Input Offset Voltage vs Temperature, External Reference, 5 Units**

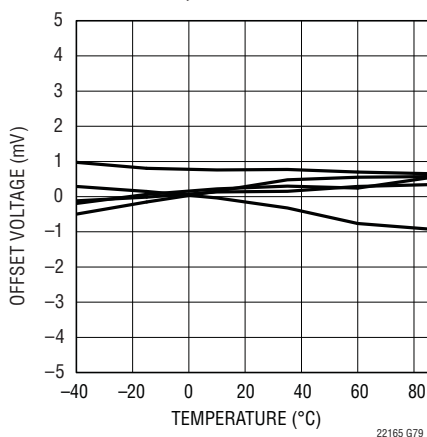

**LTC2216/LTC2215 Mid-Scale Settling After Wake-Up from Shutdown or Starting Encode Clock**

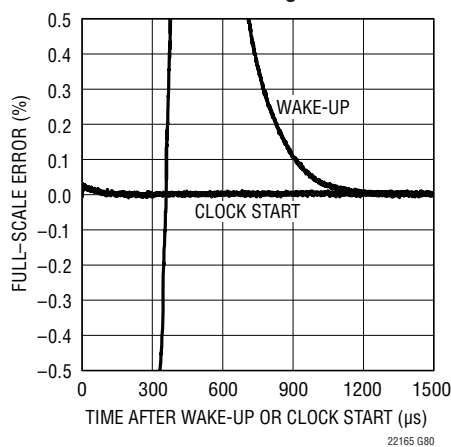

**LTC2216/LTC2215 Full-Scale Settling After Wake-Up from Shutdown or Starting Encode Clock**

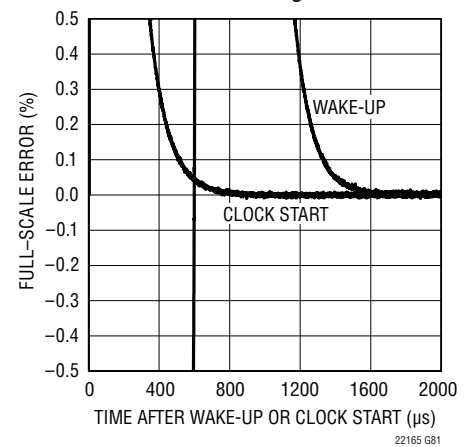

## PIN FUNCTIONS

### For CMOS Mode, Full Rate or Demultiplexed

**SENSE (Pin 1):** Reference Mode Select and External Reference Input. Tie SENSE to  $V_{DD}$  to select the internal 2.5V bandgap reference. An external reference of 2.5V or 1.25V may be used; both reference values will set a full-scale ADC range of 2.75V.

**GND (Pins 2, 4, 7, 10, 11, 14, 18):** ADC Power Ground.

**$V_{CM}$  (Pin 3):** 1.575V Output. Optimum voltage for input common mode. Must be bypassed to ground with a minimum of 2.2 $\mu$ F. Ceramic chip capacitors are recommended.

**$V_{DD}$  (Pins 5, 6, 15, 16, 17):** 3.3V Analog Supply Pin. Bypass to GND with 1 $\mu$ F ceramic chip capacitors.

**$A_{IN}^+$  (Pin 8):** Positive Differential Analog Input.

**$A_{IN}^-$  (Pin 9):** Negative Differential Analog Input.

**ENC<sup>+</sup> (Pin 12):** Positive Differential Encode Input. The sampled analog input is held on the rising edge of ENC<sup>+</sup>. Internally biased to 1.6V through a 6.2k $\Omega$  resistor. Output data can be latched on the rising edge of ENC<sup>+</sup>.

**ENC<sup>-</sup> (Pin 13):** Negative Differential Encode Input. The sampled analog input is held on the falling edge of ENC<sup>-</sup>. Internally biased to 1.6V through a 6.2k $\Omega$  resistor. Bypass to ground with a 0.1 $\mu$ F capacitor for a single-ended Encode signal.

**SHDN (Pin 19):** Power Shutdown Pin. SHDN = low results in normal operation. SHDN = high results in powered down analog circuitry and the digital outputs are placed in a high impedance state.

**DITH (Pin 20):** Internal Dither Enable Pin. DITH = low disables internal dither. DITH = high enables internal dither. Refer to Internal Dither section of this data sheet for details on dither operation.

**DB0-DB15 (Pins 21-30 and 33-38):** Digital Outputs, B Bus. DB15 is the MSB. Active in demultiplexed mode. The B bus is in high impedance state in full rate CMOS mode.

**OGND (Pins 31 and 50):** Output Driver Ground.

**$OV_{DD}$  (Pins 32 and 49):** Positive Supply for the Output Drivers. Bypass to ground with 1 $\mu$ F capacitor.

**OFB (Pin 39):** Over/Under Flow Digital Output for the B Bus. OFB is high when an over or under flow has occurred on the B bus. At high impedance state in full rate CMOS mode.

**CLKOUTB (Pin 40):** Data Valid Output. CLKOUTB will toggle at the sample rate in full rate CMOS mode or at 1/2 the sample rate in demultiplexed mode. Latch the data on the falling edge of CLKOUTB.

**CLKOUTA (Pin 41):** Inverted Data Valid Output. CLKOUTA will toggle at the sample rate in full rate CMOS mode or at 1/2 the sample rate in demultiplexed mode. Latch the data on the rising edge of CLKOUTA.

**DA0-DA15 (Pins 42-48 and 51-59):** Digital Outputs, A Bus. DA15 is the MSB. Output bus for full rate CMOS mode and demultiplexed mode.

**OFA (Pin 60):** Over/Under Flow Digital Output for the A Bus. OFA is high when an over or under flow has occurred on the A bus.

**LVDS (Pin 61):** Data Output Mode Select Pin. Connecting LVDS to 0V selects full rate CMOS mode. Connecting LVDS to 1/3 $V_{DD}$  selects demultiplexed CMOS mode. Connecting LVDS to 2/3 $V_{DD}$  selects Low Power LVDS mode. Connecting LVDS to  $V_{DD}$  selects Standard LVDS mode.

**MODE (Pin 62):** Output Format and Clock Duty Cycle Stabilizer Selection Pin. Connecting MODE to 0V selects offset binary output format and disables the clock duty cycle stabilizer. Connecting MODE to 1/3 $V_{DD}$  selects offset binary output format and enables the clock duty cycle stabilizer. Connecting MODE to 2/3 $V_{DD}$  selects 2's complement output format and enables the clock duty cycle stabilizer. Connecting MODE to  $V_{DD}$  selects 2's complement output format and disables the clock duty cycle stabilizer.

**RAND (Pin 63):** Digital Output Randomization Selection Pin. RAND low results in normal operation. RAND high selects D1-D15 to be EXCLUSIVE-ORed with D0 (the LSB). The output can be decoded by again applying an XOR operation between the LSB and all other bits. This mode of operation reduces the effects of digital output interference.

**NC (Pin 64):** Not Connected Internally. For pin compatibility with the LTC2208 this pin should be connected to GND or  $V_{DD}$  as required. Otherwise no connection.

**GND (Exposed Pad):** ADC Power Ground. The exposed pad on the bottom of the package must be soldered to ground.

## PIN FUNCTIONS

### For LVDS Mode. STANDARD or LOW POWER

**SENSE (Pin 1):** Reference Mode Select and External Reference Input. Tie SENSE to  $V_{DD}$  to select the internal 2.5V bandgap reference. An external reference of 2.5V or 1.25V may be used; both reference values will set a full-scale ADC range of 2.75V.

**GND (Pins 2, 4, 7, 10, 11, 14, 18):** ADC Power Ground.

**$V_{CM}$  (Pin 3):** 1.575V Output. Optimum voltage for input common mode. Must be bypassed to ground with a minimum of 2.2 $\mu$ F. Ceramic chip capacitors are recommended.

**$V_{DD}$  (Pins 5, 6, 15, 16, 17):** 3.3V Analog Supply Pin. Bypass to GND with 1 $\mu$ F ceramic chip capacitors.

**$A_{IN}^+$  (Pin 8):** Positive Differential Analog Input.

**$A_{IN}^-$  (Pin 9):** Negative Differential Analog Input.

**ENC<sup>+</sup> (Pin 12):** Positive Differential Encode Input. The sampled analog input is held on the rising edge of ENC<sup>+</sup>. Internally biased to 1.6V through a 6.2k $\Omega$  resistor. Output data can be latched on the rising edge of ENC<sup>+</sup>.

**ENC<sup>-</sup> (Pin 13):** Negative Differential Encode Input. The sampled analog input is held on the falling edge of ENC<sup>-</sup>. Internally biased to 1.6V through a 6.2k $\Omega$  resistor. Bypass to ground with a 0.1 $\mu$ F capacitor for a single-ended Encode signal.

**SHDN (Pin 19):** Power Shutdown Pin. SHDN = low results in normal operation. SHDN = high results in powered down analog circuitry and the digital outputs are set in high impedance state.

**DITH (Pin 20):** Internal Dither Enable Pin. DITH = low disables internal dither. DITH = high enables internal dither. Refer to Internal Dither section of the data sheet for details on dither operation.

**D0<sup>-</sup>/D0<sup>+</sup> to D15<sup>-</sup>/D15<sup>+</sup> (Pins 21-30, 33-38, 41-48 and 51-58):** LVDS Digital Outputs. All LVDS outputs require differential 100 $\Omega$  termination resistors at the LVDS receiver. D15<sup>+</sup>/D15<sup>-</sup> is the MSB.

**OGND (Pins 31 and 50):** Output Driver Ground.

**$OV_{DD}$  (Pins 32 and 49):** Positive Supply for the Output Drivers. Bypass to ground with 0.1 $\mu$ F capacitor.

**CLKOUT<sup>-</sup>/CLKOUT<sup>+</sup> (Pins 39 and 40):** LVDS Data Valid Output. Latch data on the rising edge of CLKOUT<sup>+</sup>, falling edge of CLKOUT<sup>-</sup>.

**OF<sup>-</sup>/OF<sup>+</sup> (Pins 59 and 60):** Over/Under Flow Digital Output OF is high when an over or under flow has occurred.

**LVDS (Pin 61):** Data Output Mode Select Pin. Connecting LVDS to 0V selects full rate CMOS mode. Connecting LVDS to 1/3 $V_{DD}$  selects demultiplexed CMOS mode. Connecting LVDS to 2/3 $V_{DD}$  selects Low Power LVDS mode. Connecting LVDS to  $V_{DD}$  selects Standard LVDS mode.

**MODE (Pin 62):** Output Format and Clock Duty Cycle Stabilizer Selection Pin. Connecting MODE to 0V selects offset binary output format and disables the clock duty cycle stabilizer. Connecting MODE to 1/3 $V_{DD}$  selects offset binary output format and enables the clock duty cycle stabilizer. Connecting MODE to 2/3 $V_{DD}$  selects 2's complement output format and enables the clock duty cycle stabilizer. Connecting MODE to  $V_{DD}$  selects 2's complement output format and disables the clock duty cycle stabilizer.

**RAND (Pin 63):** Digital Output Randomization Selection Pin. RAND low results in normal operation. RAND high selects D1-D15 to be EXCLUSIVE-ORed with D0 (the LSB). The output can be decoded by again applying an XOR operation between the LSB and all other bits. The mode of operation reduces the effects of digital output interference.

**NC (Pin 64):** Not Connected Internally. For pin compatibility with the LTC2208 this pin should be connected to GND or  $V_{DD}$  as required. Otherwise no connection.

**GND (Exposed Pad Pin 65):** ADC Power Ground. The exposed pad on the bottom of the package must be soldered to ground.

BLOCK DIAGRAM

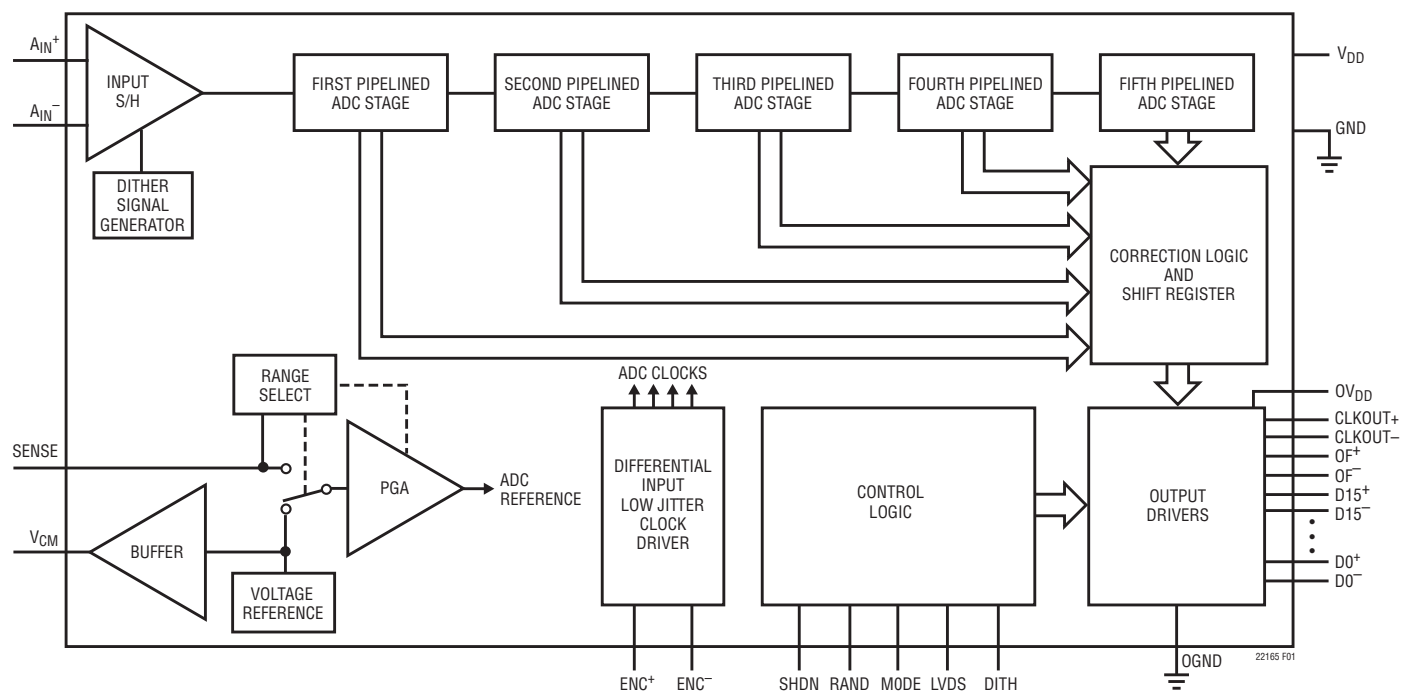


Figure 1. Functional Block Diagram

## OPERATION

### DYNAMIC PERFORMANCE

#### Signal-to-Noise Plus Distortion Ratio

The signal-to-noise plus distortion ratio  $[S/(N+D)]$  is the ratio between the RMS amplitude of the fundamental input frequency and the RMS amplitude of all other frequency components at the ADC output. The output is band limited to frequencies above DC to below half the sampling frequency (Nyquist Frequency).

#### Signal-to-Noise Ratio

The signal-to-noise (SNR) is the ratio between the RMS amplitude of the fundamental input frequency and the RMS amplitude of all other frequency components, except the first five harmonics.

#### Total Harmonic Distortion

Total harmonic distortion is the ratio of the RMS sum of all harmonics of the input signal to the fundamental itself. The out-of-band harmonics alias into the frequency band between DC and half the sampling frequency (Nyquist Frequency). THD is expressed as:

$$THD = -20\log\left(\sqrt{V_2^2 + V_3^2 + V_4^2 + \dots V_N^2} / V_1\right)$$

where  $V_1$  is the RMS amplitude of the fundamental frequency and  $V_2$  through  $V_N$  are the amplitudes of the second through  $n$ th harmonics.

#### Intermodulation Distortion

If the ADC input signal consists of more than one spectral component, the ADC transfer function nonlinearity can produce intermodulation distortion (IMD) in addition to THD. IMD is the change in one sinusoidal input caused by the presence of another sinusoidal input at a different frequency.

If two pure sine waves of frequencies  $f_a$  and  $f_b$  are applied to the ADC input, nonlinearities in the ADC transfer function can create distortion products at the sum and difference frequencies of  $m f_a \pm n f_b$ , where  $m$  and  $n = 0, 1, 2, 3$ , etc. For example, the 3rd order IMD terms include  $(2f_a + f_b)$ ,  $(f_a + 2f_b)$ ,  $(2f_a - f_b)$  and  $(f_a - 2f_b)$ . The 3rd order IMD is defined as the ratio of the RMS value of either input tone to the RMS value of the largest 3rd order IMD product.

#### Spurious Free Dynamic Range (SFDR)

The ratio of the RMS input signal amplitude to the RMS value of the peak spurious spectral component expressed in dBc. SFDR may also be calculated relative to full-scale and expressed in dBFS.

#### Full Power Bandwidth

The Full Power bandwidth is that input frequency at which the amplitude of the reconstructed fundamental is reduced by 3dB from a full-scale input signal.

#### Aperture Delay Time

The time from when a rising  $ENC^+$  equals the  $ENC^-$  voltage to the instant that the input signal is held by the sample-and-hold circuit.

#### Aperture Delay Jitter

The variation in the aperture delay time from conversion to conversion. This random variation will result in noise when sampling an AC input. The signal-to-noise ratio term due to the jitter alone will be:

$$SNR_{JITTER} = -20\log(2\pi \cdot f_{IN} \cdot t_{JITTER})$$

This formula states SNR due to jitter *alone* at any amplitude in terms of dBc.

## APPLICATIONS INFORMATION

### CONVERTER OPERATION

The LTC2216/LTC2215 are CMOS pipelined multistep converters with a low noise front-end. As shown in Figure 1, these converters have five pipelined ADC stages; a sampled analog input will result in a digitized value seven cycles later (see the Timing Diagram section). The analog input is differential for improved common mode noise immunity and to maximize the input range. Additionally, the differential input drive will reduce even order harmonics of the sample and hold circuit. The encode input is also differential for improved common mode noise immunity.

The LTC2216/LTC2215 have two phases of operation, determined by the state of the differential  $ENC^+/ENC^-$  input pins. For brevity, the text will refer to  $ENC^+$  greater than  $ENC^-$  as  $ENC$  high and  $ENC^+$  less than  $ENC^-$  as  $ENC$  low.

Each pipelined stage shown in Figure 1 contains an ADC, a reconstruction DAC and an interstage amplifier. In operation, the ADC quantizes the input to the stage and the quantized value is subtracted from the input by the DAC to produce a residue. The residue is amplified and output by the residue amplifier. Successive stages operate out of phase so that when odd stages are outputting their residue, the even stages are acquiring that residue and vice versa.

When  $ENC$  is low, the analog input is sampled differentially directly onto the input sample-and-hold capacitors, inside the “input S/H” shown in the block diagram. At the instant that  $ENC$  transitions from low to high, the voltage on the sample capacitors is held. While  $ENC$  is high, the held input voltage is buffered by the S/H amplifier which drives the first pipelined ADC stage. The first stage acquires the output of the S/H amplifier during the high phase of  $ENC$ . When  $ENC$  goes back low, the first stage produces its residue which is acquired by the second stage. At the same time, the input S/H goes back to acquiring the analog input. When  $ENC$  goes high, the second stage produces its residue which is acquired by the third stage. An identical process is repeated for the third and fourth stages, resulting in a fourth stage residue that is sent to the fifth stage for final evaluation.

Each ADC stage following the first has additional range to accommodate flash and amplifier offset errors. Results

from all of the ADC stages are digitally delayed such that the results can be properly combined in the correction logic before being sent to the output buffer.

### SAMPLE/HOLD OPERATION AND INPUT DRIVE

#### Sample/Hold Operation

Figure 2 shows an equivalent circuit for the LTC2216/LTC2215 CMOS differential sample and hold. The differential analog inputs are sampled directly onto sampling capacitors ( $C_{SAMPLE}$ ) through NMOS transistors. The capacitors shown attached to each input ( $C_{PARASITIC}$ ) are the summation of all other capacitance associated with each input.

During the sample phase when  $ENC$  is low, the NMOS transistors connect the analog inputs to the sampling capacitors and they charge to, and track the differential input voltage. When  $ENC$  transitions from low to high, the sampled input voltage is held on the sampling capacitors. During the hold phase when  $ENC$  is high, the sampling capacitors are disconnected from the input and the held voltage is passed to the ADC core for processing. As  $ENC$  transitions for high to low, the inputs are reconnected to

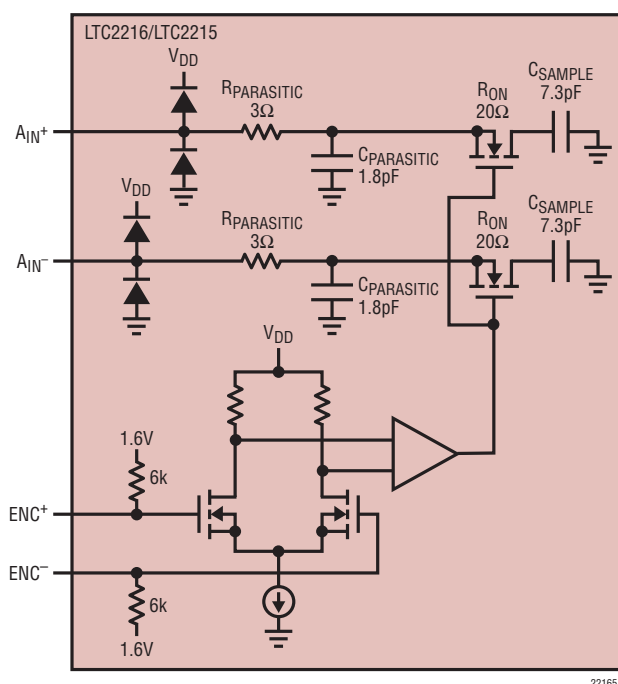


Figure 2. Equivalent Input Circuit

## APPLICATIONS INFORMATION

the sampling capacitors to acquire a new sample. Since the sampling capacitors still hold the previous sample, a charging glitch proportional to the change in voltage between samples will be seen at this time. If the change between the last sample and the new sample is small, the charging glitch seen at the input will be small. If the input change is large, such as the change seen with input frequencies near Nyquist, then a larger charging glitch will be seen.

### Common Mode Bias

The ADC sample-and-hold circuit requires differential drive to achieve specified performance. Each input should swing  $\pm 0.6875\text{V}$  for the  $2.75\text{V}$  range, around a common mode voltage of  $1.575\text{V}$ . The  $V_{CM}$  output pin (Pin 3) is designed to provide the common mode bias level.  $V_{CM}$  can be tied directly to the center tap of a transformer to set the DC input level or as a reference level to an op amp differential driver circuit. The  $V_{CM}$  pin must be bypassed to ground close to the ADC with  $2.2\mu\text{F}$  or greater.

### Input Drive Impedance

As with all high performance, high speed ADCs the dynamic performance of the LTC2216/LTC2215 can be influenced by the input drive circuitry, particularly the second and third harmonics. Source impedance and input reactance can influence SFDR. At the falling edge of ENC the sample and hold circuit will connect the sampling capacitor to the input pin and start the sampling period. The sampling period ends when ENC rises, holding the sampled input on the sampling capacitor. Ideally, the input circuitry should be fast enough to fully charge the sampling capacitor during the sampling period  $1/(2 \cdot f_{\text{ENCODE}})$ ; however, this is not always possible and the incomplete settling may degrade the SFDR. The sampling glitch has been designed to be as linear as possible to minimize the effects of incomplete settling.

For the best performance it is recommended to have a source impedance of  $100\Omega$  or less for each input. The source impedance should be matched for the differential inputs. Poor matching will result in higher even order harmonics, especially the second.

## INPUT DRIVE CIRCUITS


### Input Filtering

A first-order RC low-pass filter at the input of the ADC can serve two functions: limit the noise from input circuitry and provide isolation from ADC S/H switching. The LTC2216/LTC2215 have a very broadband S/H circuit, DC to  $400\text{MHz}$ . This can be used in a wide range of applications, therefore, it is not possible to provide a single recommended RC filter.

Figures 3 and 4 show two examples of input RC filtering for two ranges of input frequencies. In general it is desirable to make the capacitors as large as can be tolerated—this will help suppress random noise as well as noise coupled from the digital circuitry. The LTC2216/LTC2215 do not require any input filter to achieve data sheet specifications; however, no filtering will put more stringent noise requirements on the input drive circuitry.

### Transformer Coupled Circuits

Figure 3 shows the LTC2216/LTC2215 being driven by an RF transformer with a center-tapped secondary. The secondary center tap is DC biased with  $V_{CM}$ , setting the ADC input signal at its optimum DC level. Figure 3 shows a 1:1 turns ratio transformer. Other turns ratios can be used; however, as the turns ratio increases so does the impedance seen by the ADC. Source impedance greater than  $50\Omega$  can reduce the input bandwidth and increase

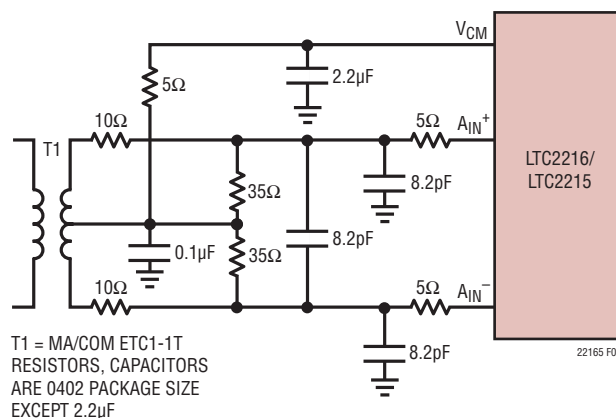


**Figure 3. Single-Ended to Differential Conversion Using a Transformer. Recommended for Input Frequencies from 5MHz to 100MHz**

## APPLICATIONS INFORMATION

high frequency distortion. A disadvantage of using a transformer is the loss of low frequency response. Most small RF transformers have poor performance at frequencies below 1MHz.

Center-tapped transformers provide a convenient means of DC biasing the secondary; however, they often show poor balance at high input frequencies, resulting in large 2nd order harmonics.


Figure 4 shows transformer coupling using a transmission line balun transformer. This type of transformer has much better high-frequency response and balance than flux coupled center-tap transformers. Coupling capacitors are added at the ground and input primary terminals to allow the secondary terminals to be biased at 1.575V.

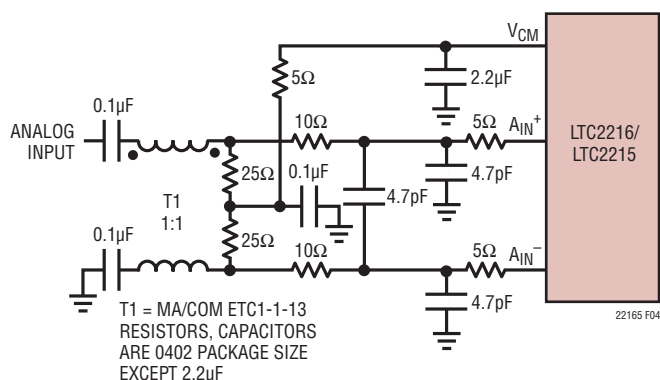

**Figure 4. Using a Transmission Line Balun Transformer.**  
Recommended for Input Frequencies from 100MHz to 250MHz

## Direct Coupled Circuits


Figure 5 demonstrates the use of a differential amplifier to convert a single ended input signal into a differential input signal. The advantage of this method is that it provides low frequency input response; however, the limited gain bandwidth of any op amp or closed-loop amplifier will degrade the ADC SFDR at high input frequencies. Additionally, wideband op amps or differential amplifiers tend to have high noise. As a result, the SNR will be degraded unless the noise bandwidth is limited prior to the ADC input.

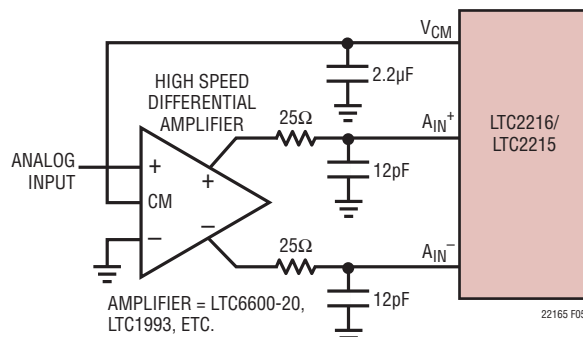

### Figure 5. DC Coupled Input with Differential Amplifier

## Reference Operation

Figure 6 shows the LTC2216/LTC2215 reference circuitry consisting of a 2.5V bandgap reference, a programmable gain amplifier and control circuit. The LTC2216/LTC2215 has three modes of reference operation: Internal Reference, 1.25V external reference or 2.5V external reference. To use the internal reference, tie the SENSE pin to  $V_{DD}$ . To use an external reference, simply apply either a 1.25V or 2.5V reference voltage to the SENSE input pin. Both 1.25V and 2.5V applied to SENSE will result in a full-scale range of  $2.75V_{P-P}$ . A 1.575V output,  $V_{CM}$ , is provided for a common mode bias for input drive circuitry. An external bypass capacitor is required for the  $V_{CM}$  output. This provides a high frequency low impedance path to ground for internal and external circuitry. This is also the compensation capacitor for the reference; which will not be stable without this capacitor. The minimum value required for stability is 2.2 $\mu$ F.

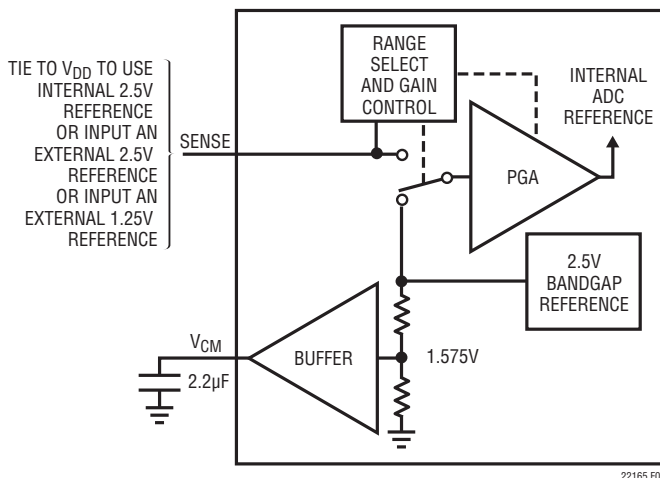

### Figure 6. Reference Circuit

## APPLICATIONS INFORMATION

The internal programmable gain amplifier provides the internal reference voltage for the ADC. This amplifier has very stringent settling requirements and therefore is not accessible for external use.

The SENSE pin can be driven  $\pm 5\%$  around the nominal 2.5V or 1.25V external reference inputs. This adjustment range can be used to trim the ADC gain error or other system gain errors. When selecting the internal reference, the SENSE pin should be tied to  $V_{DD}$  as close to the converter as possible. If the sense pin is driven externally it should be bypassed to ground as close to the device as possible with 1 $\mu$ F ceramic capacitor.

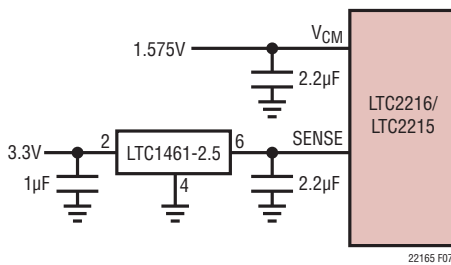


Figure 7. A 2.75V Range ADC with an External 2.5V Reference

### Driving the Encode Inputs

The noise performance of the LTC2216/LTC2215 can depend on the encode signal quality as much as on the analog input. The encode inputs are intended to be driven differentially, primarily for noise immunity from common mode noise sources. Each input is biased through a 6k resistor to a 1.6V bias. The bias resistors set the DC operating point for transformer coupled drive circuits and can set the logic threshold for single-ended drive circuits.

Any noise present on the encode signal will result in additional aperture jitter that will be RMS summed with the inherent ADC aperture jitter.

In applications where jitter is critical (high input frequencies), take the following into consideration:

1. Differential drive should be used.
2. Use as large an amplitude possible. If using transformer coupling, use a higher turns ratio to increase the amplitude.

3. If the ADC is clocked with a fixed-frequency sinusoidal signal, filter the encode signal to reduce wideband noise.
4. Balance the capacitance and series resistance at both encode inputs such that any coupled noise will appear at both inputs as common mode noise.

The encode inputs have a common mode range of 1.2V to  $V_{DD}$ . Each input may be driven from ground to  $V_{DD}$  for single-ended drive.


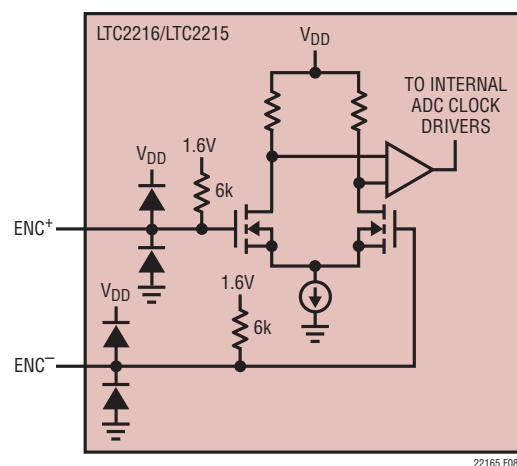



Figure 8. Equivalent Encode Input Circuit

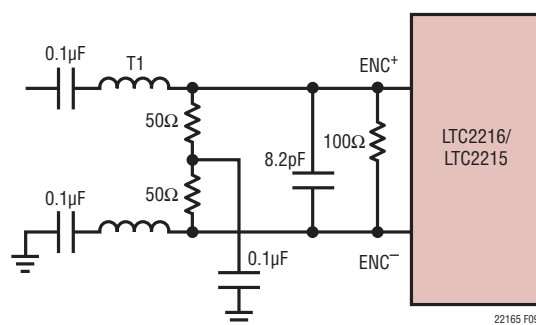


T1 = MA/COM ETC1-1-13  
RESISTORS AND CAPACITORS  
ARE 0402 PACKAGE SIZE

Figure 9. Balun-Driven Encode

## APPLICATIONS INFORMATION

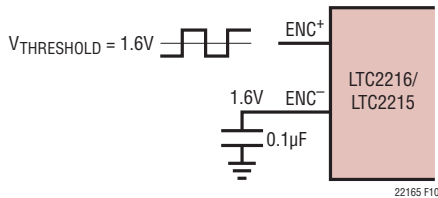

**Figure 10. Single-Ended ENC Drive, Not Recommended for Low Jitter**

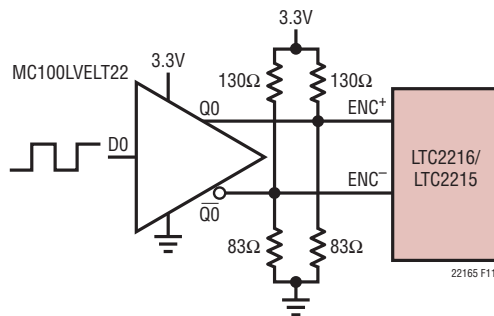

**Figure 11. ENC Drive Using a CMOS to PECL Translator**

### Maximum and Minimum Encode Rates

The maximum encode rate for the LTC2216 is 80Msps, while the maximum encode rate for the LTC2215 is 65Msps. For the ADCs to operate properly the encode signal should have a 50% ( $\pm 5\%$ ) duty cycle. Each half cycle must have at least 5.94ns for the LTC2216 internal circuitry to have enough settling time for proper operation. For the LTC2215, each half cycle must be at least 7.31ns. Achieving a precise 50% duty cycle is easy with differential sinusoidal drive using a transformer or using symmetric differential logic such as PECL or LVDS. When using a single-ended ENCODE signal asymmetric rise and fall times can result in duty cycles that are far from 50%.

An optional clock duty cycle stabilizer can be used if the input clock does not have a 50% duty cycle. This circuit uses the rising edge of ENC pin to sample the analog input. The falling edge of ENC is ignored and an internal falling edge is generated by a phase-locked loop. The input clock duty cycle can vary from 30% to 70% and the clock duty cycle stabilizer will maintain a constant 50% internal duty cycle. If the clock is turned off for a long period of time, the duty cycle stabilizer circuit will require one hundred clock cycles for the PLL to lock onto the input clock. To

use the clock duty cycle stabilizer, the MODE pin must be connected to  $1/3V_{DD}$  or  $2/3V_{DD}$  using external resistors.

The lower limit of the LTC2216/LTC2215 sample rate is determined by droop affecting the sample and hold circuits. The pipelined architecture of this ADC relies on storing analog signals on small valued capacitors. Junction leakage will discharge the capacitors. The specified minimum operating frequency for both the LTC2215 and LTC2216 is 1Msps.

## DIGITAL OUTPUTS

### Digital Output Modes

The LTC2216/LTC2215 can operate in four digital output modes: standard LVDS, low power LVDS, full rate CMOS, and demultiplexed CMOS. The LVDS pin selects the mode of operation. This pin has a four level logic input, centered at 0,  $1/3V_{DD}$ ,  $2/3V_{DD}$  and  $V_{DD}$ . An external resistor divider can be used to set the  $1/3V_{DD}$  and  $2/3V_{DD}$  logic levels. Table 1 shows the logic states for the LVDS pin.

**Table 1. LVDS Pin Function**

| LVDS        | DIGITAL OUTPUT MODE |
|-------------|---------------------|
| 0V(GND)     | Full-Rate CMOS      |
| $1/3V_{DD}$ | Demultiplexed CMOS  |
| $2/3V_{DD}$ | Low Power LVDS      |
| $V_{DD}$    | LVDS                |

### Digital Output Buffers (CMOS Modes)

Figure 11 shows an equivalent circuit for a single output buffer in CMOS Mode, Full-Rate or Demultiplexed. Each buffer is powered by  $0V_{DD}$  and  $0GND$ , isolated from the ADC power and ground. The additional N-channel transistor in the output driver allows operation down to low voltages. The internal resistor in series with the output makes the output appear as  $50\Omega$  to external circuitry and eliminates the need for external damping resistors.

As with all high speed/high resolution converters, the digital output loading can affect the performance. The digital outputs of the LTC2216/LTC2215 should drive a minimum capacitive load to avoid possible interaction between the digital outputs and sensitive input circuitry. The output should be buffered with a device such as the

22165f

## APPLICATIONS INFORMATION

ALVCH16373 CMOS latch. For full speed operation the capacitive load should be kept under 10pF. A resistor in series with the output may be used, but is not required since the ADC has a series resistor of 43Ω on-chip.

Lower  $OV_{DD}$  voltages will also help reduce interference from the digital outputs.

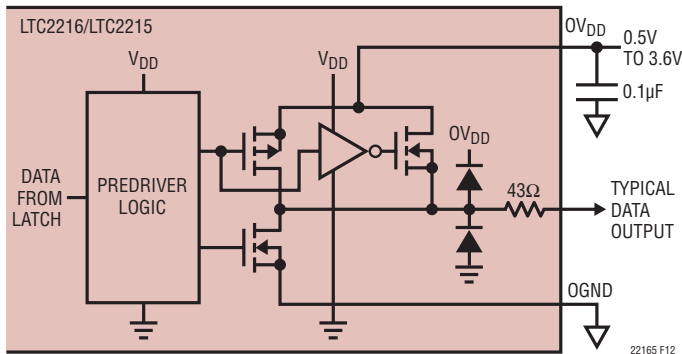


Figure 12. Equivalent Circuit for a Digital Output Buffer

### Digital Output Buffers (LVDS Modes)

Figure 13 shows an equivalent circuit for an LVDS output pair. A 3.5mA current is steered from  $OUT^+$  to  $OUT^-$  or vice versa, which creates a  $\pm 350mV$  differential voltage across the 100Ω termination resistor at the LVDS receiver. A feedback loop regulates the common mode output voltage to 1.20V. For proper operation each LVDS output pair must be terminated with an external 100Ω termination

resistor, even if the signal is not used (such as  $OF^+/OF^-$  or  $CLKOUT^+/CLKOUT^-$ ). To minimize noise the PC board traces for each LVDS output pair should be routed close together. To minimize clock skew all LVDS PC board traces should have about the same length.

In Low Power LVDS Mode 1.75mA is steered between the differential outputs, resulting in  $\pm 175mV$  at the LVDS receiver's 100Ω termination resistor. The output common mode voltage is 1.20V, the same as standard LVDS Mode.

### Data Format

The LTC2216/LTC2215 parallel digital output can be selected for offset binary or 2's complement format. The format is selected with the MODE pin. This pin has a four level logic input, centered at 0,  $1/3V_{DD}$ ,  $2/3V_{DD}$  and  $V_{DD}$ . An external resistor divider can be used to set the  $1/3V_{DD}$  and  $2/3V_{DD}$  logic levels. Table 2 shows the logic states for the MODE pin.

Table 2. MODE Pin Function

| MODE        | OUTPUT FORMAT  | CLOCK DUTY CYCLE STABILIZER |
|-------------|----------------|-----------------------------|
| 0V(GND)     | Offset Binary  | Off                         |
| $1/3V_{DD}$ | Offset Binary  | On                          |
| $2/3V_{DD}$ | 2's Complement | On                          |
| $V_{DD}$    | 2's Complement | Off                         |

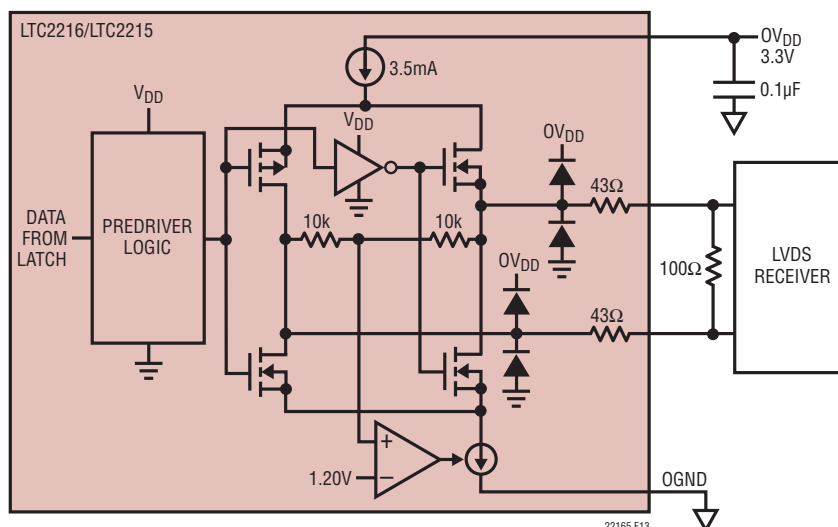


Figure 13. Equivalent Output Buffer in LVDS Mode

22165f

## APPLICATIONS INFORMATION

### Overflow Bit

An overflow output bit (OF) indicates when the converter is over-ranged or under-ranged. In CMOS mode, a logic high on the OFA pin indicates an overflow or underflow on the A data bus, while a logic high on the OFB pin indicates an overflow on the B data bus. In LVDS mode, a differential logic high on OF<sup>+</sup>/OF<sup>-</sup> pins indicates an overflow or underflow.

### Output Clock

The ADC has a delayed version of the encode input available as a digital output, CLKOUT. The CLKOUT pin can be used to synchronize the converter data to the digital system. This is necessary when using a sinusoidal encode. In both CMOS modes, A bus data will be updated as CLKOUTA falls and CLKOUTB rises. In demultiplexed CMOS mode the B bus data will be updated as CLKOUTA falls and CLKOUTB rises.

In Full Rate CMOS Mode, only the A data bus is active; data may be latched on the rising edge of CLKOUTA or the falling edge of CLKOUTB.

In demultiplexed CMOS mode CLKOUTA and CLKOUTB will toggle at 1/2 the frequency of the encode signal. Both the A bus and the B bus may be latched on the rising edge of CLKOUTA or the falling edge of CLKOUTB.

### Digital Output Randomizer

Interference from the ADC digital outputs is sometimes unavoidable. Interference from the digital outputs may be from capacitive or inductive coupling, or coupling through the ground plane. Even a tiny coupling factor can result in discernible unwanted tones in the ADC output spectrum. By randomizing the digital output before it is transmitted off chip, these unwanted tones can be randomized, trading a slight increase in the noise floor for a large reduction in unwanted tone amplitude.

The digital output is “Randomized” by applying an exclusive-OR logic operation between the LSB and all other data output bits. To decode, the reverse operation is applied; that is, an exclusive-OR operation is applied between the LSB and all other bits. The LSB, OF and CLKOUT output

are not affected. The output Randomizer function is active when the RAND pin is high.

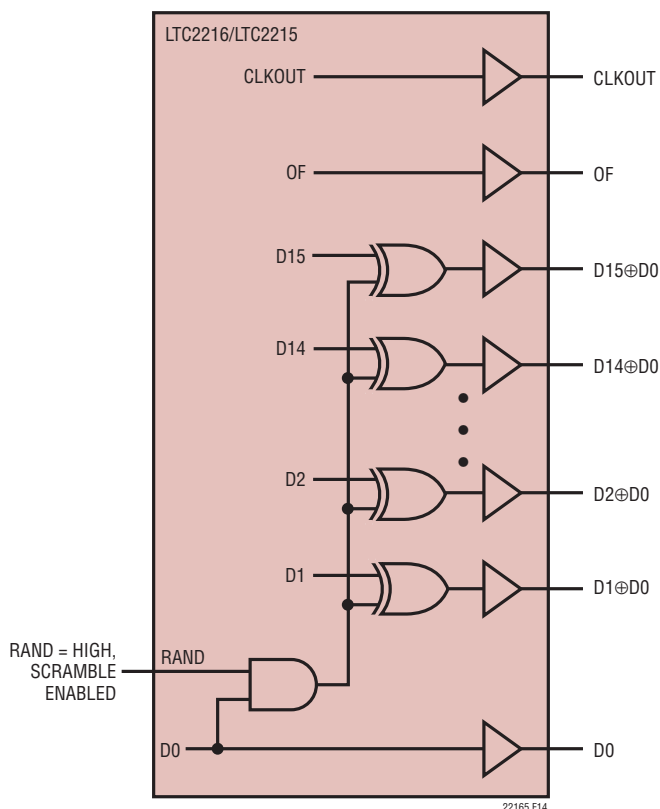


Figure 14. Functional Equivalent of Digital Output Randomizer

### Output Driver Power

Separate output power and ground pins allow the output drivers to be isolated from the analog circuitry. The power supply for the digital output buffers, OV<sub>DD</sub>, should be tied to the same power supply as for the logic being driven. For example, if the converter is driving a DSP powered by a 1.8V supply, then OV<sub>DD</sub> should be tied to that same 1.8V supply. In CMOS mode OV<sub>DD</sub> can be powered with any logic voltage up to the 3.6V. OGND can be powered with any voltage from ground up to 1V and must be less than OV<sub>DD</sub>. The logic outputs will swing between OGND and OV<sub>DD</sub>. In LVDS Mode, OV<sub>DD</sub> should be connected to a 3.3V supply and OGND should be connected to GND.

## APPLICATIONS INFORMATION

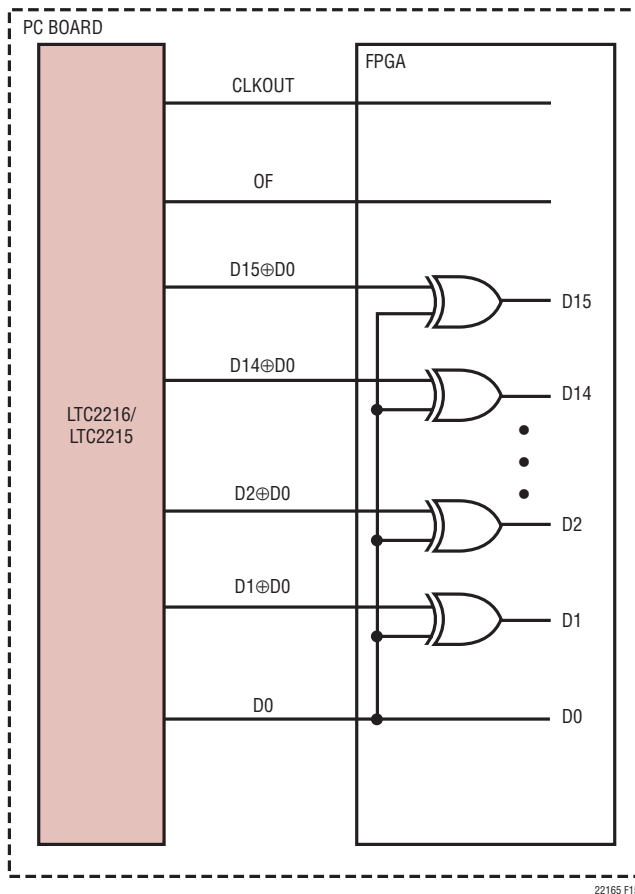


Figure 15. Descrambling a Scrambled Digital Output

## Internal Dither

The LTC2216/LTC2215 is a 16-bit ADC with a very linear transfer function; however, at low input levels even slight imperfections in the transfer function will result in unwanted tones. Small errors in the transfer function are usually a result of ADC element mismatches. An optional internal dither mode can be enabled to randomize the input location on the ADC transfer curve, resulting in improved SFDR for low signal levels.

As shown in Figure 16, the output of the sample-and-hold amplifier is summed with the output of a dither DAC. The dither DAC is driven by a long sequence pseudo-random number generator; the random number fed to the dither DAC is also subtracted from the ADC result. If the dither DAC is precisely calibrated to the ADC, very little of the dither signal will be seen at the output. The dither signal that does leak through will appear as white noise. The dither DAC is calibrated to result in typically less than 0.5dB elevation in the noise floor of the ADC, as compared to the noise floor with dither off when a suitable input termination is provided (see Demo Board schematic DC996B).

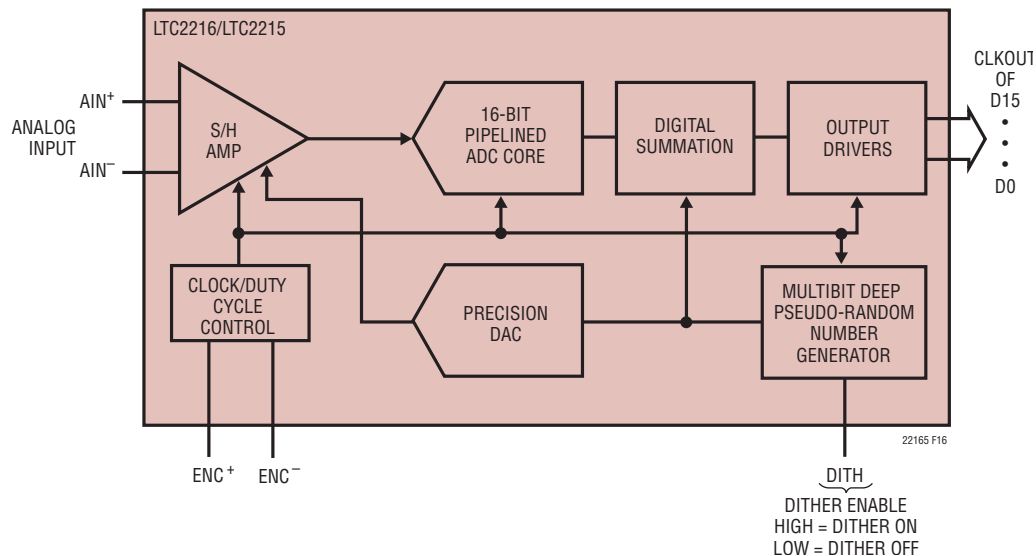


Figure 16. Functional Equivalent Block Diagram of Internal Dither Circuit

## APPLICATIONS INFORMATION

### Grounding and Bypassing

The LTC2216/LTC2215 requires a printed circuit board with a clean unbroken ground plane; a multilayer board with an internal ground plane is recommended. The pinout of the LTC2216/LTC2215 has been optimized for a flowthrough layout so that the interaction between inputs and digital outputs is minimized. Layout for the printed circuit board should ensure that digital and analog signal lines are separated as much as possible. In particular, care should be taken not to run any digital track alongside an analog signal track or underneath the ADC.


High quality ceramic bypass capacitors should be used at the  $V_{DD}$ ,  $V_{CM}$ , and  $OV_{DD}$  pins. Bypass capacitors must be located as close to the pins as possible. The traces connecting the pins and bypass capacitors must be kept short and should be made as wide as possible.

The LTC2216/LTC2215 differential inputs should run parallel and close to each other. The input traces should be as short as possible to minimize capacitance and to minimize noise pickup.


### Heat Transfer

Most of the heat generated by the LTC2216/LTC2215 is transferred from the die through the bottom-side exposed pad. For good electrical and thermal performance, the exposed pad must be soldered to a large grounded pad on the PC board. It is critical that the exposed pad and all ground pins are connected to a ground plane of sufficient area with as many vias as possible.

## APPLICATIONS INFORMATION

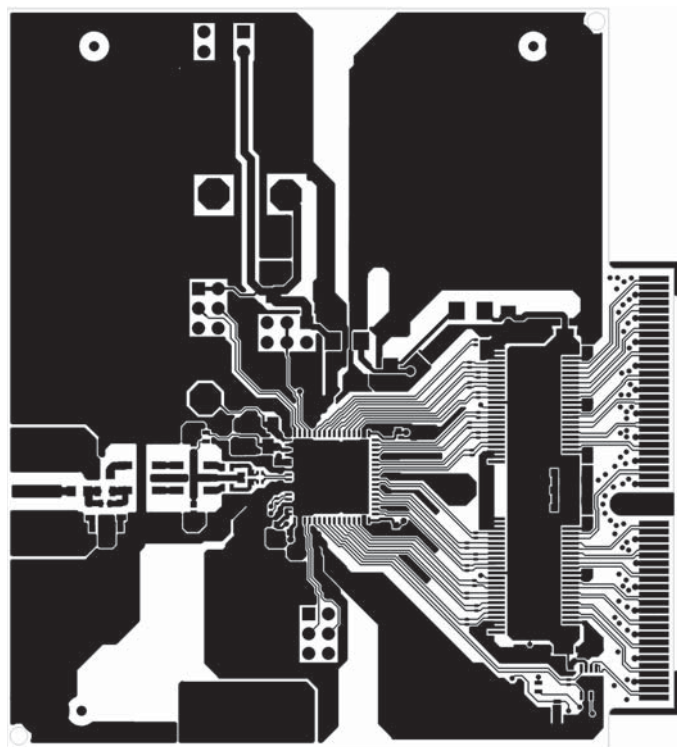


Layer 1 Component Side

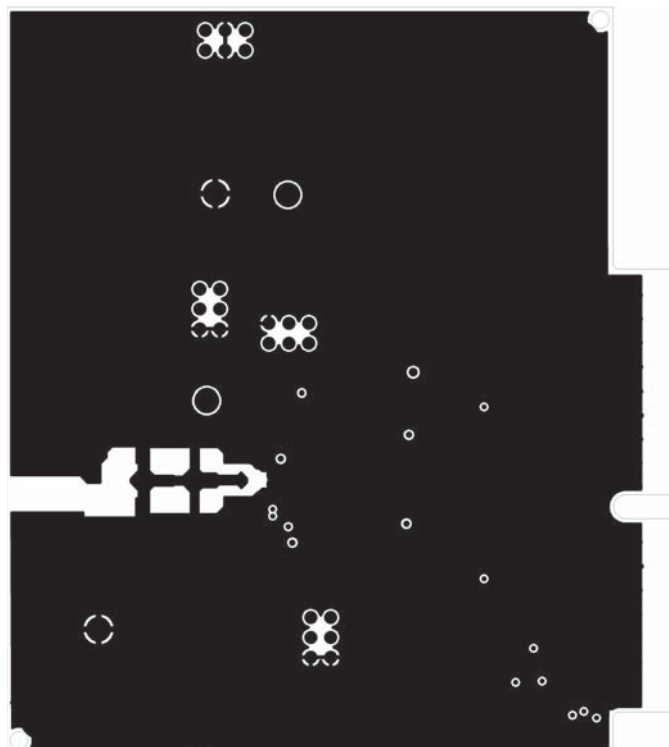


Layer 2 GND Plane

## APPLICATIONS INFORMATION

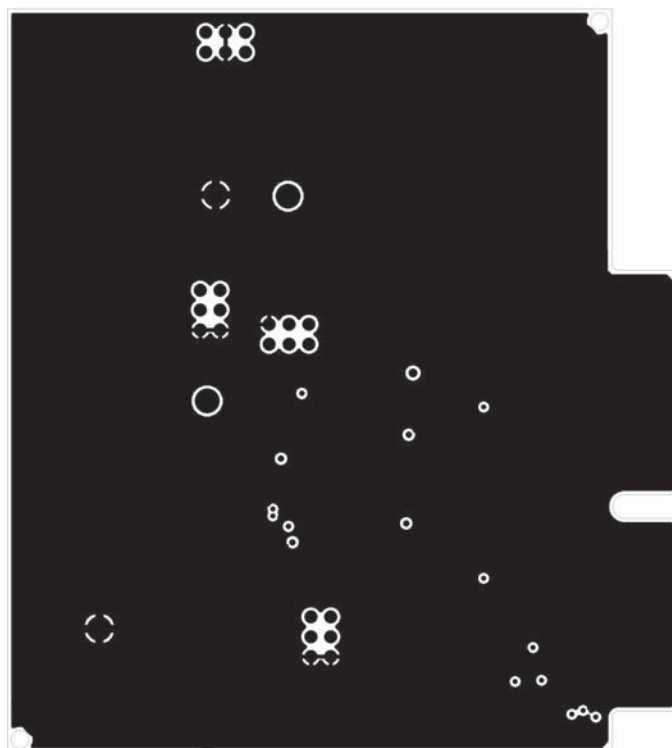


Layer 3 GND

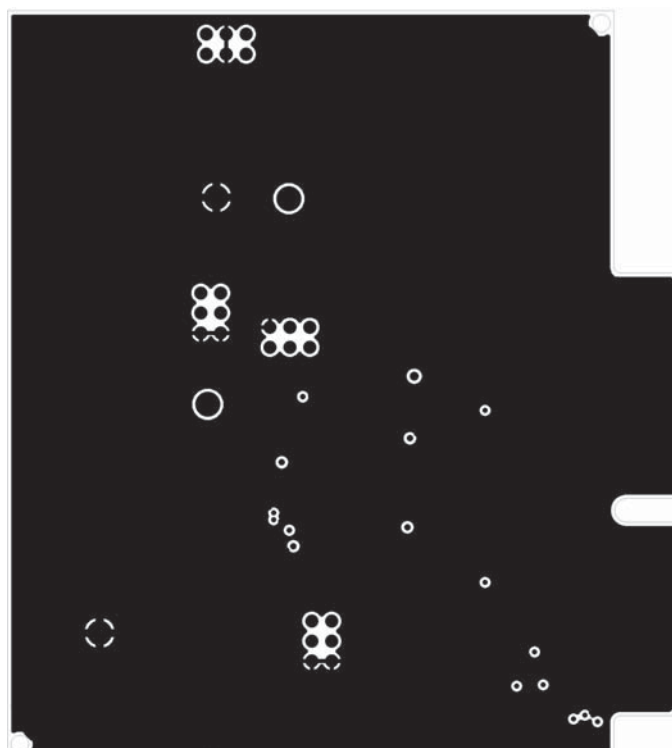

Layer 4 GND

## APPLICATIONS INFORMATION

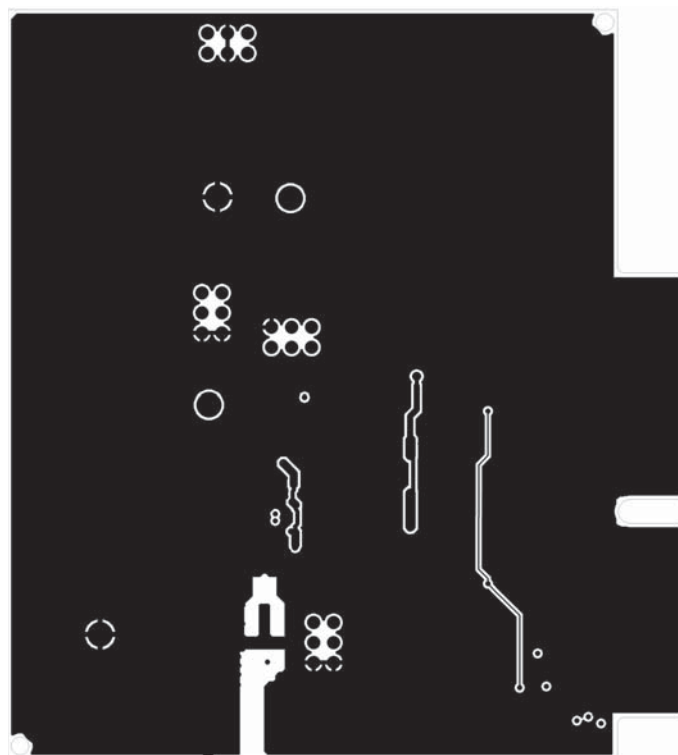

Layer 5 GND




Layer 6 Bottom Side




# PACKAGE DESCRIPTION

**UP Package**  
**64-Lead Plastic QFN (9mm × 9mm)**  
 (Reference LTC DWG # 05-08-1705)

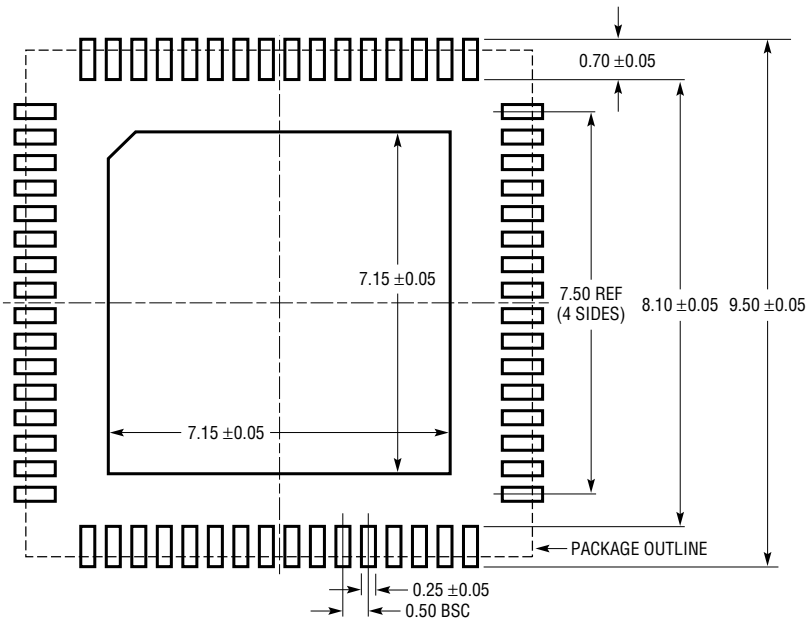

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
 APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

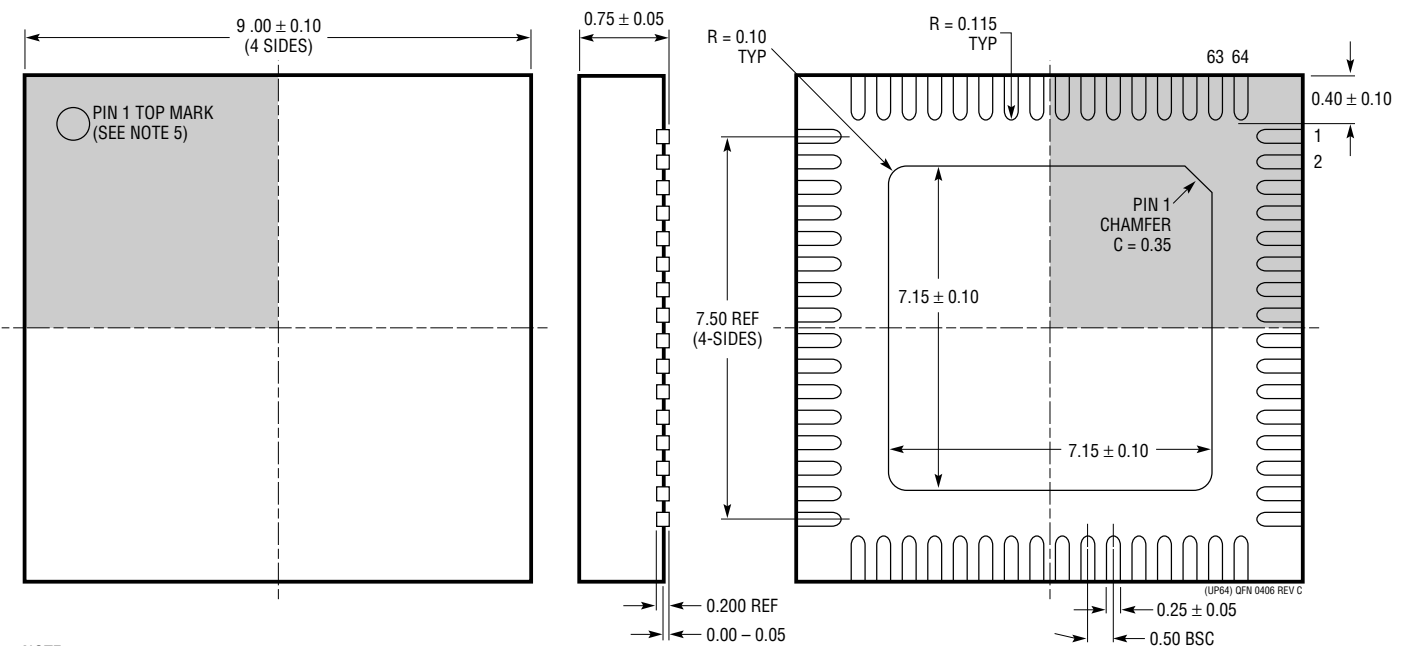

## NOTE:

1. DRAWING CONFORMS TO JEDEC PACKAGE OUTLINE MO-220 VARIATION WNWJ-5
2. ALL DIMENSIONS ARE IN MILLIMETERS
3. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.20mm ON ANY SIDE, IF PRESENT
4. EXPOSED PAD SHALL BE SOLDER PLATED
5. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE
6. DRAWING NOT TO SCALE

BOTTOM VIEW—EXPOSED PAD

## RELATED PARTS

| PART NUMBER | DESCRIPTION                                             | COMMENTS                                                                                  |
|-------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------|
| LT1993      | High Speed Differential Op Amp                          | 600MHz BW, 75dBc Distortion at 70MHz                                                      |
| LTC2202     | 16-Bit, 10Msps ADC                                      | 150mW, 81.6dB SNR, 100dB SFDR                                                             |
| LTC2203     | 16-Bit, 25Msps ADC                                      | 230mW, 81.6dB SNR, 100dB SFDR                                                             |
| LTC2204     | 16-Bit, 40Msps ADC                                      | 470mW, 79.1dB SNR, 100dB SFDR                                                             |
| LTC2205     | 16-Bit, 65Msps ADC                                      | 530mW, 79dB SNR, 100dB SFDR                                                               |
| LTC2206     | 16-Bit, 80Msps ADC                                      | 725mW, 77.9dB SNR, 100dB SFDR                                                             |
| LTC2207     | 16-Bit, 105Msps ADC                                     | 900mW, 77.9dB SNR, 100dB SFDR                                                             |
| LTC2208     | 16-Bit, 130Msps ADC                                     | 1250mW, 77.7dB SNR, 100dB SFDR                                                            |
| LTC2209     | 16-Bit, 160Msps ADC                                     | 1450mW, 77.1dB SNR, 100dB SFDR                                                            |
| LTC2217     | 16-Bit, 105Msps ADC                                     | Low Noise 1190mW, 81.2dB SNR, 100dB SFDR                                                  |
| LTC2220     | 12-Bit, 170Msps ADC                                     | 890mW, 67.5dB SNR, 9mm × 9mm QFN Package                                                  |
| LTC2220-1   | 12-Bit, 185Msps ADC                                     | 910mW, 67.5dB SNR, 9mm × 9mm QFN Package                                                  |
| LTC2249     | 14-Bit, 65Msps ADC                                      | 230mW, 73dB SNR, 5mm × 5mm QFN Package                                                    |
| LTC2250     | 10-Bit, 105Msps ADC                                     | 320mW, 61.6dB SNR, 5mm × 5mm QFN Package                                                  |
| LTC2251     | 10-Bit, 125Msps ADC                                     | 395mW, 61.6dB SNR, 5mm × 5mm QFN Package                                                  |
| LTC2252     | 12-Bit, 105Msps ADC                                     | 320mW, 70.2dB SNR, 5mm × 5mm QFN Package                                                  |
| LTC2253     | 12-Bit, 125Msps ADC                                     | 395mW, 70.2dB SNR, 5mm × 5mm QFN Package                                                  |
| LTC2254     | 14-Bit, 105Msps ADC                                     | 320mW, 72.5dB SNR, 5mm × 5mm QFN Package                                                  |
| LTC2255     | 14-Bit, 125Msps ADC                                     | 395mW, 72.4dB SNR, 5mm × 5mm QFN Package                                                  |
| LTC2299     | Dual 14-Bit, 80Msps ADC                                 | 445mW, 73dB SNR, 9mm × 9mm QFN Package                                                    |
| LT5522      | 400MHz to 2.7GHz High Linearity Downconverting Mixer    | 4.5V to 5.25V Supply, 25dBm IIP3 at 900MHz, NF = 12.5dB, 50Ω Single-Ended RF and LO Ports |
| LT5527      | 400MHz to 3.7GHz High Linearity Downconverting Mixer    | High IIP3: 23.5dBm at 1.9GHz, Conversion Gain: 2.3dB at 1.9GHz, NF = 12.5dB               |
| LT5557      | 400MHz to 3.7GHz High Signal Level Downconverting Mixer | High IIP3: 23.5dBm at 3.5GHz, Conversion Gain: 1.7dB at 3.5GHz                            |