




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-960040	2009/06/22	Prune	Change The Note And 螺牙



8
Sealing Nut




7
Seals




6
Clamp Ring




5
Gasket



4
Lock Nut



3
Screw



2
Connector





1
O-ring


With Liquid Glue

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Liquid Glue: Clear
- * Screw: Stainless Steel
- * Ring: Black, EPDM
- * Nut: Black, Nylon+GF
- * Gasket: Black, Silicone
- * Clamping Ring: Black, Nylon
- * Seals: Black, EPDM
- * Sealing Nut: Black, Nylon
- * PE Bag $\varnothing$ 9 * PE Bag: 90*85mm
- * Seal For Cable OD: $\varnothing$ 5.5mm~10.8mm
- * One Set Unassembled In One PE Bag
- * Application AWG: 14~16AWG

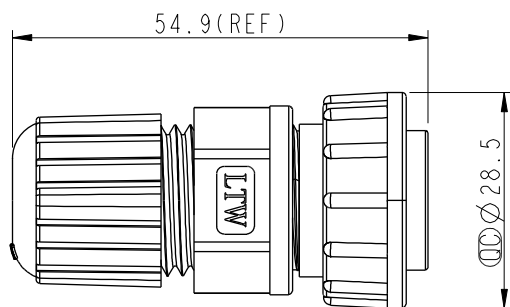

Pin Assignments
Front View



UNIT: mm		TOLERANCE		TITLE	
.X	± 0.25	Large Assy Lock 2Pin F Conn M Pin		SCALE	
.XX	± 0.1			1:1	
.XXX	± 0.05			A4	
ANGLES	$\pm 1^\circ$	REV.	B	WC-REV.	A.2
				SHEET 1 OF 1	
				$\varnothing$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DC-02BFMB-LL7001	DRAWN BY	SamChang	DATE	2012-05-03
DWG NO	DC-02BFMB-LL7001	CHECKED BY	Jeffrey	DATE	2012-06-13
CUSTOMER	ALTW	APPROVED BY	Lion	DATE	2012-06-13