
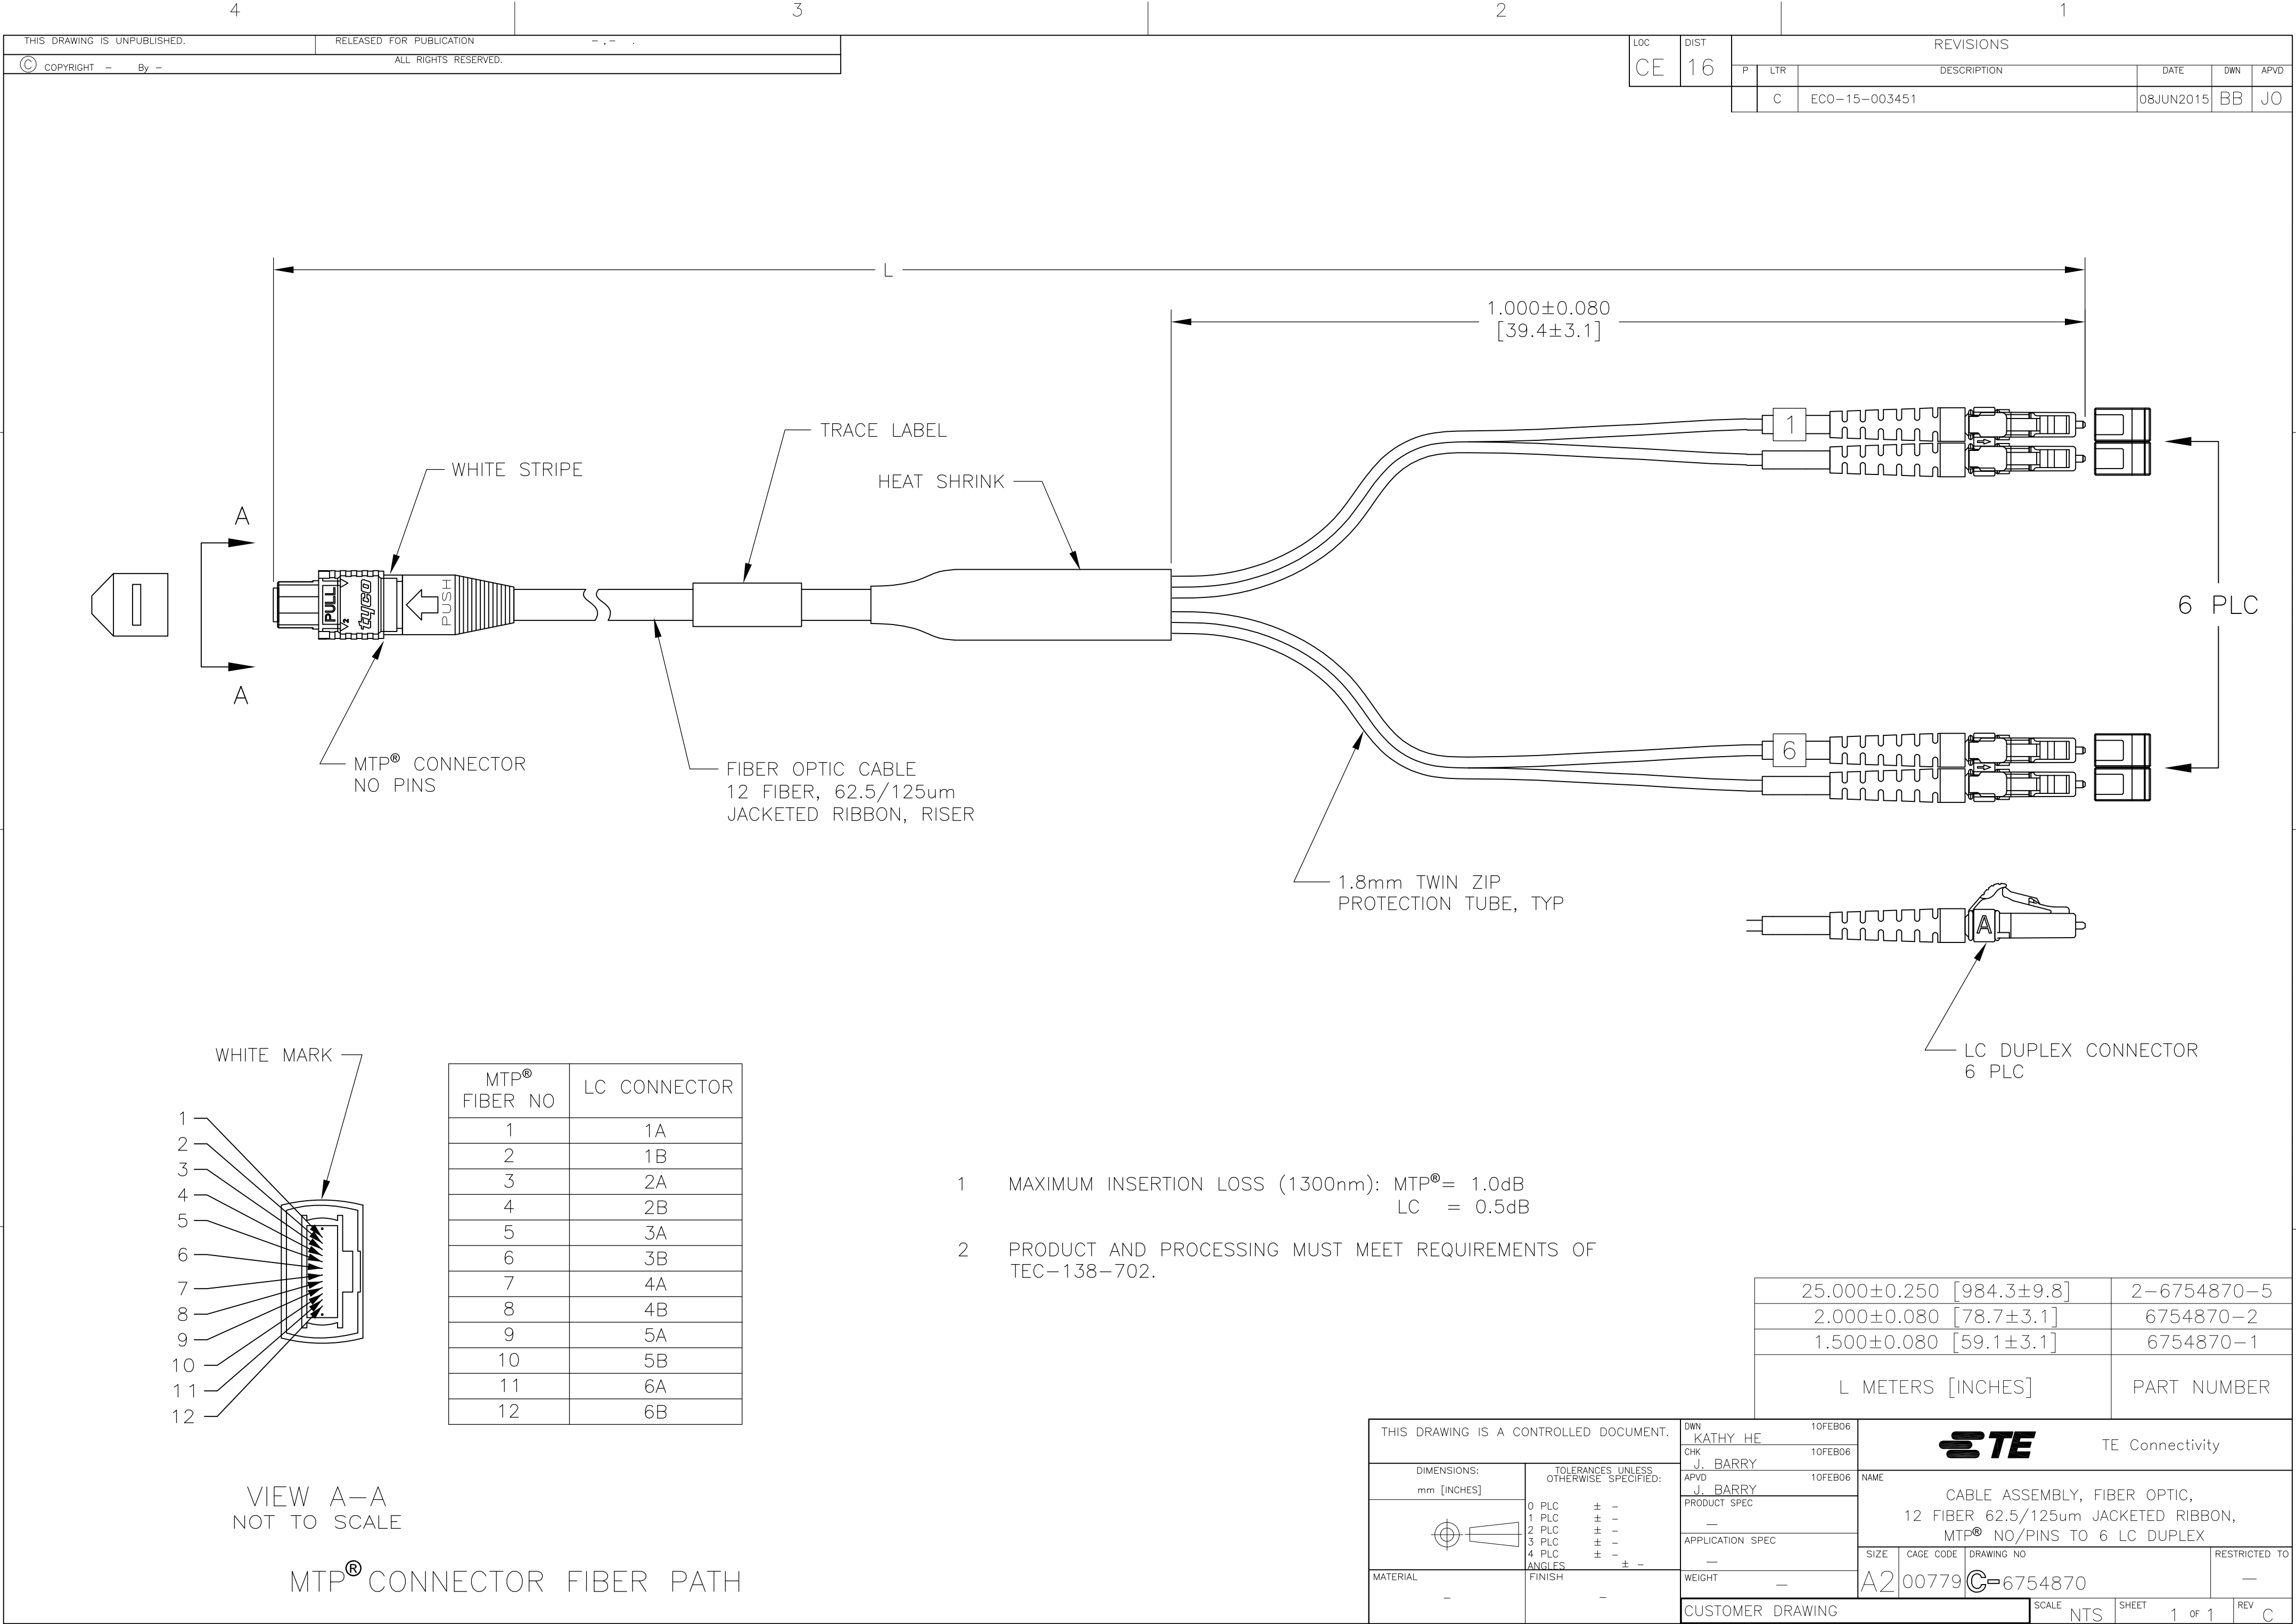




MTP® FIBER NO	LC CONNECTOR
1	1A
2	1B
3	2A
4	2B
5	3A
6	3B
7	4A
8	4B
9	5A
10	5B
11	6A
12	6B

- 1
- MAXIMUM INSERTION LOSS (1300nm): MTP®= 1.0dB
LC = 0.5dB
- 2
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
TEC-138-702.

25.000±0.250 [984.3±9.8]	2-6754870-5
2.000±0.080 [78.7±3.1]	6754870-2
1.500±0.080 [59.1±3.1]	6754870-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATHY HE 10FEB06	 TE Connectivity					
DIMENSIONS: mm [INCHES]		CHK J. BARRY 10FEB06						
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD J. BARRY 10FEB06	NAME CABLE ASSEMBLY, FIBER OPTIC, 12 FIBER 62.5/125um JACKETED RIBBON, MTP® NO/PINS TO 6 LC DUPLEX					
		PRODUCT SPEC —						
		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO —		
		MATERIAL —	FINISH —	WEIGHT —	A2		00779	C-6754870
CUSTOMER DRAWING			SCALE	NTS	SHEET	1 of 1	REV	C