
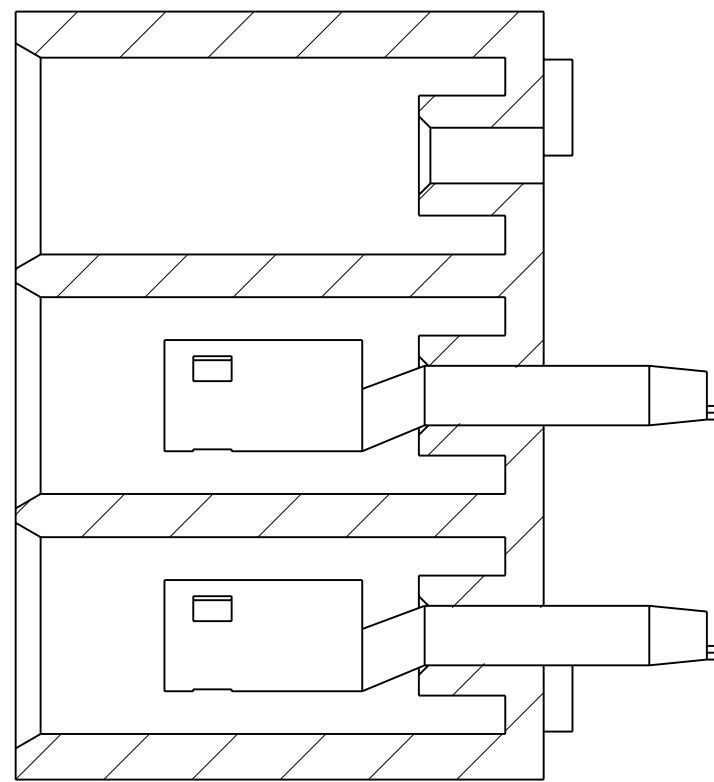
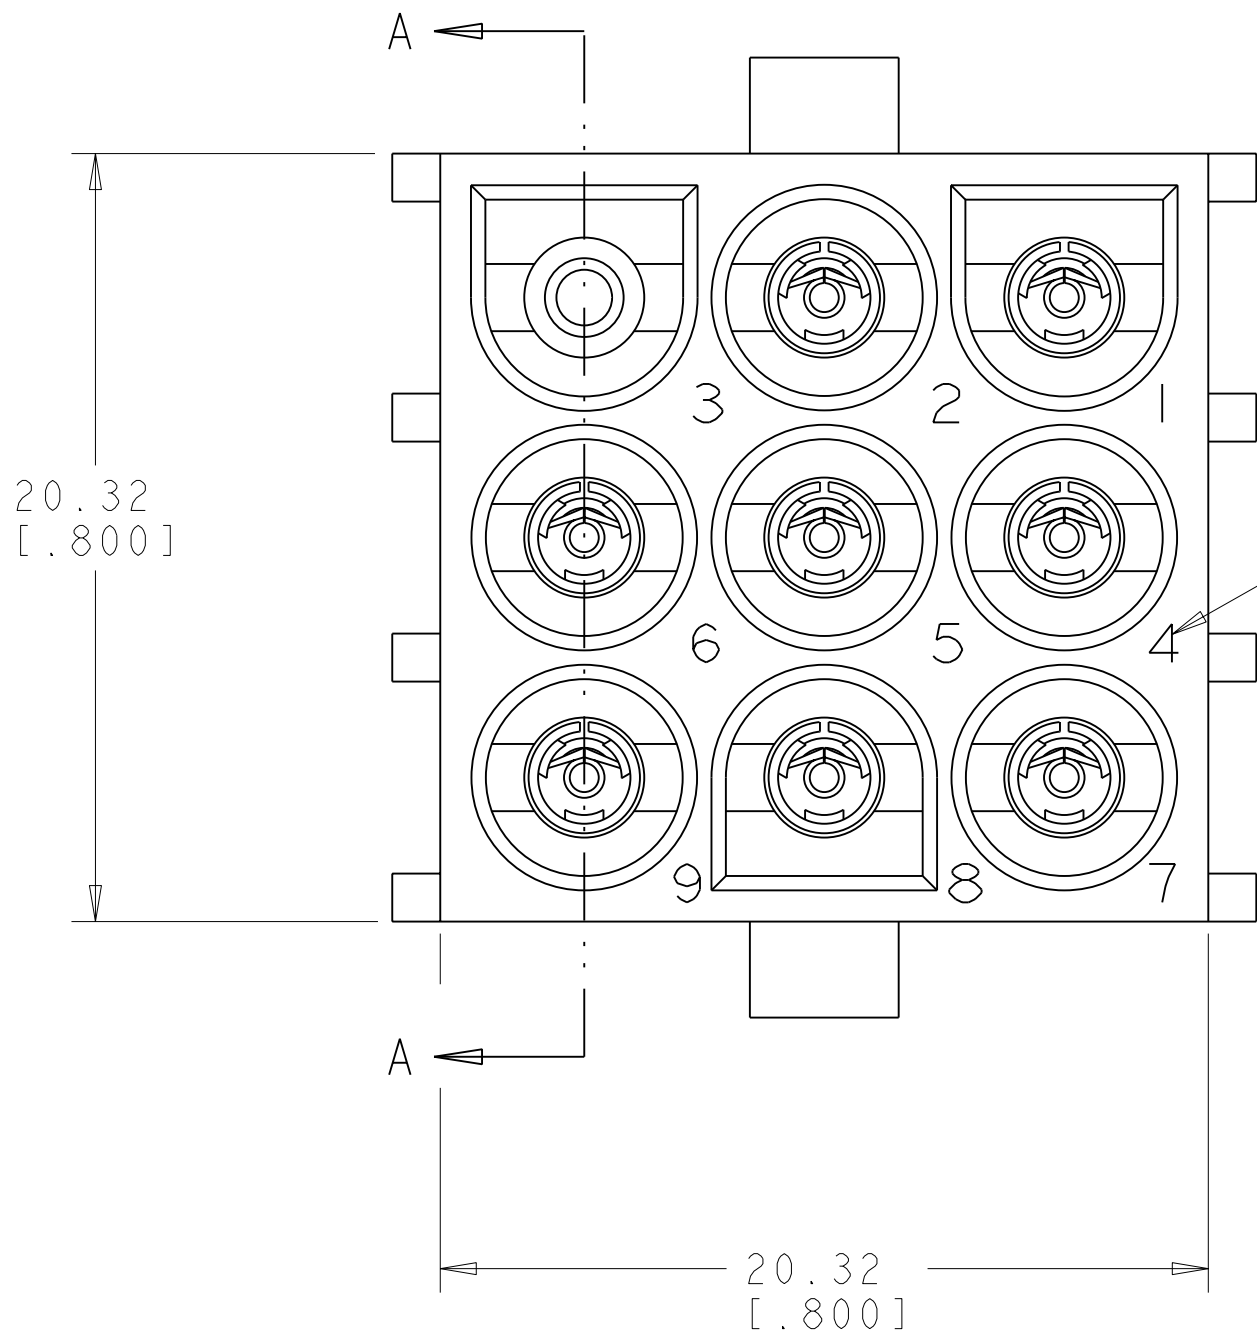
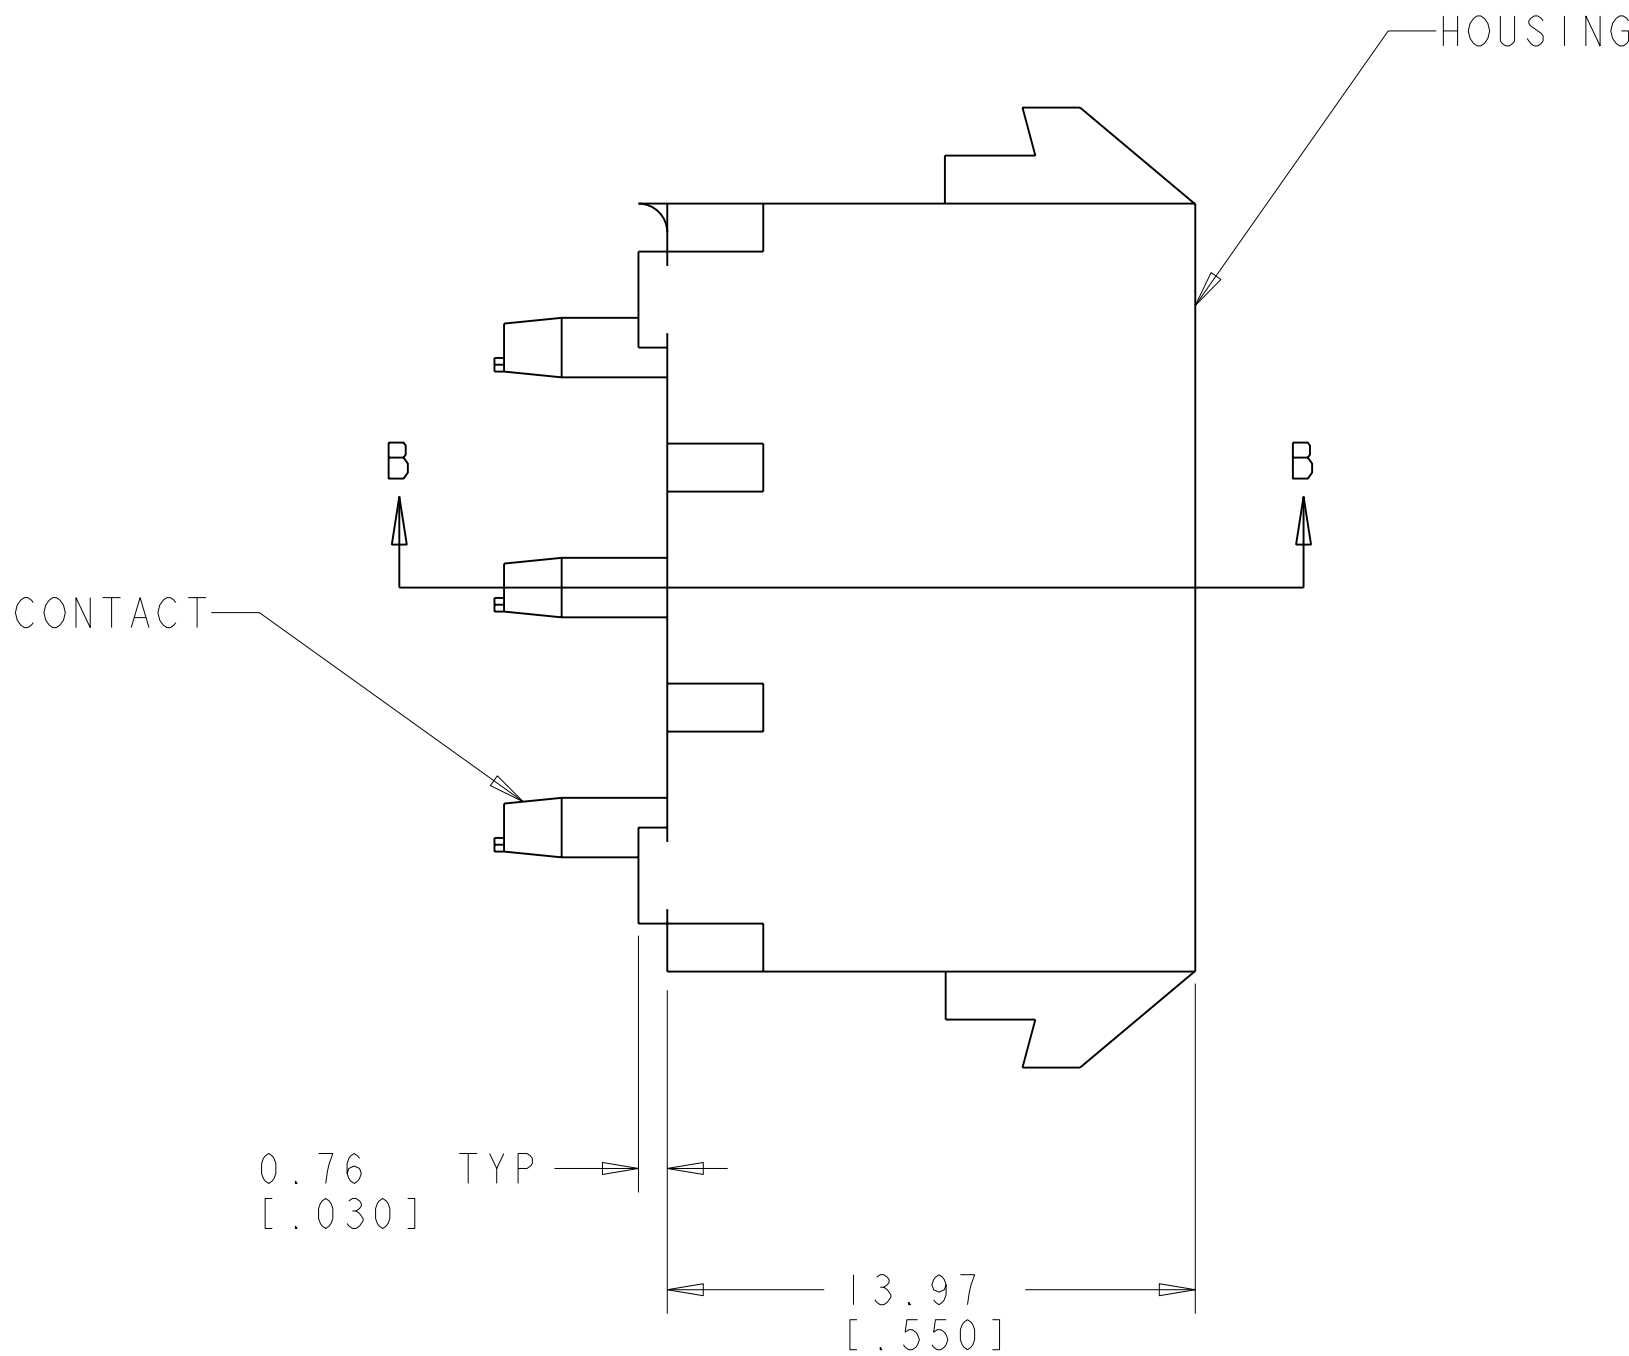


LOC	DIST	REVISIONS					
CM	00	F	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED PER WR-05-27	03MAY05	KW	SR


1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

3. DIMENSIONS IN BRACKETS ARE IN INCHES.

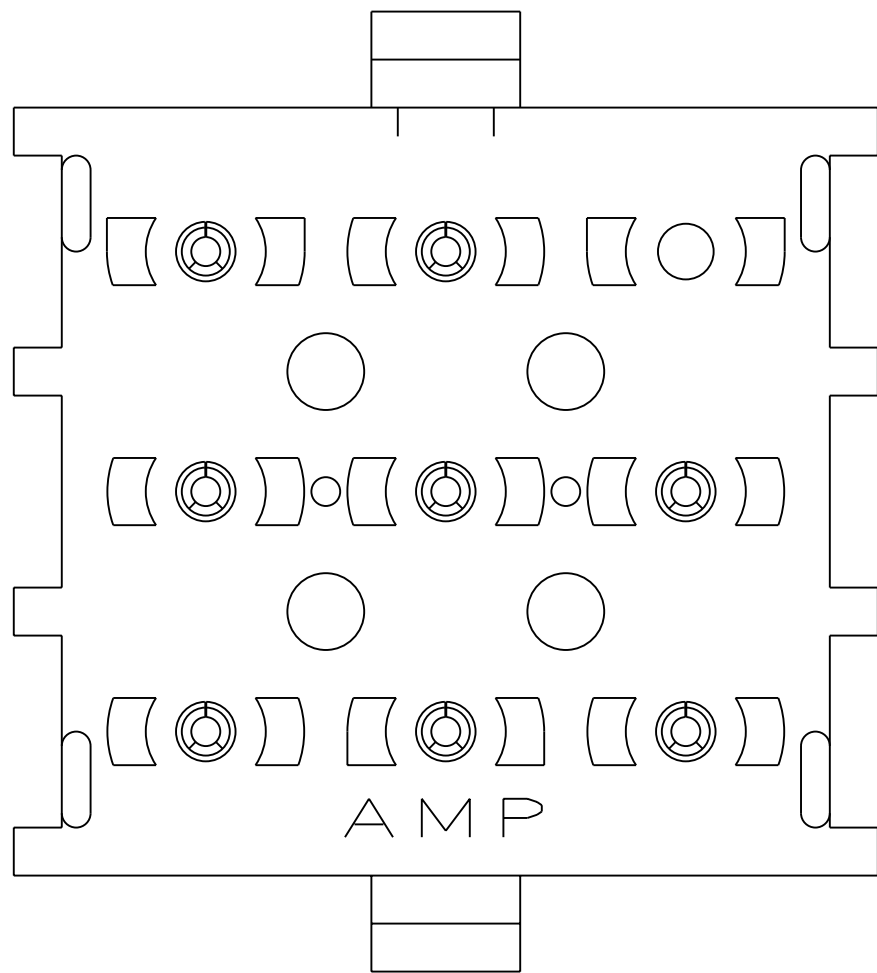


SECTION A-A

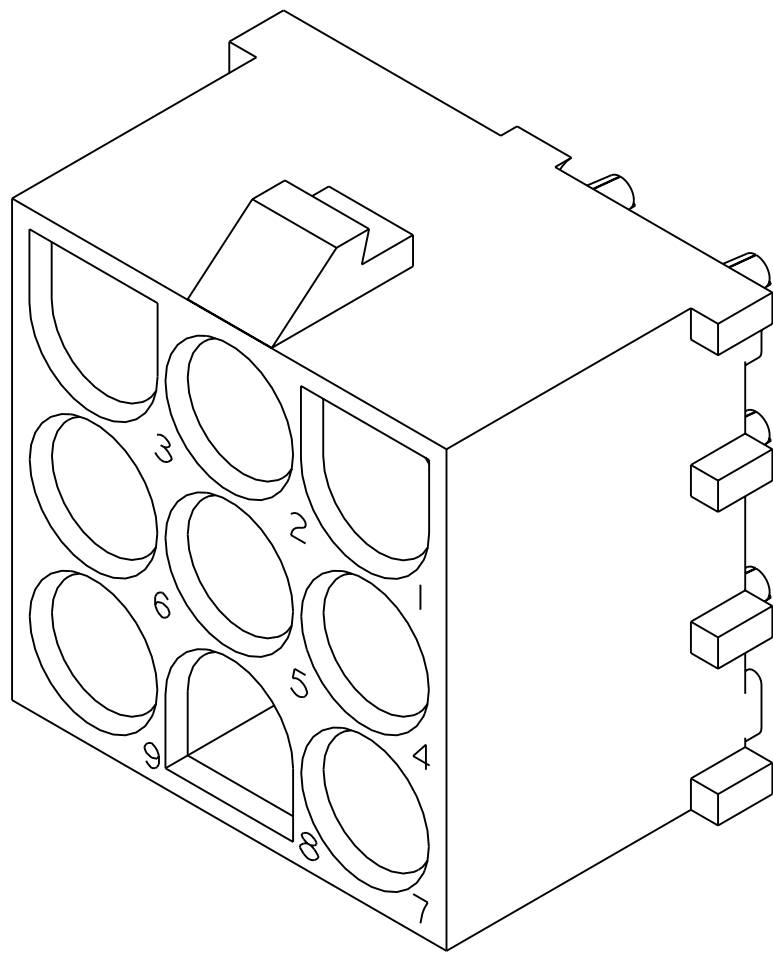


3 DIMENSIONAL MODEL
SCALE 4:1

1586682-3 SHOWN

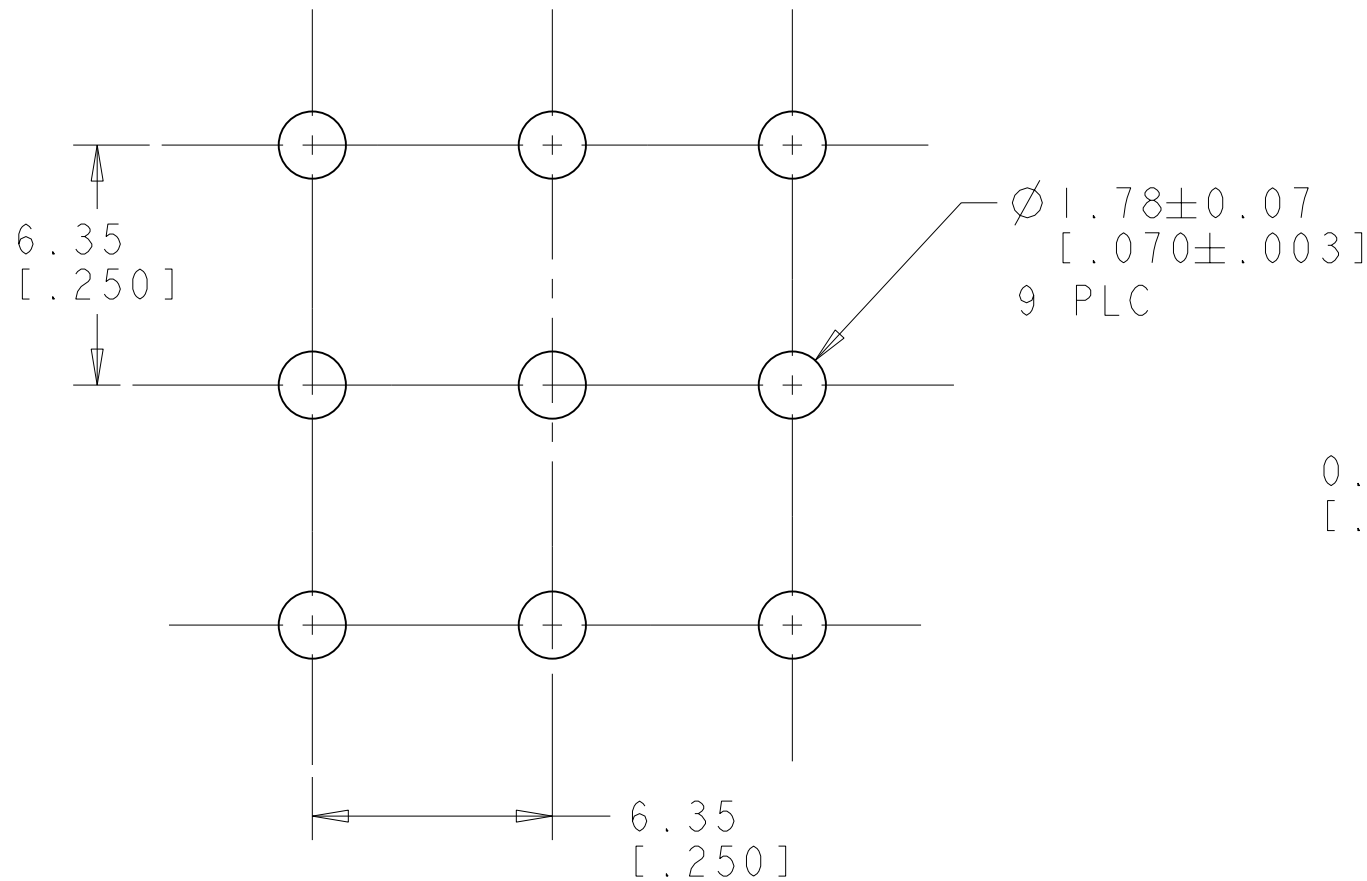


RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD
HOLE THAT CORRESPONDS TO REMOVED
CONTACT CAN BE OMITTED

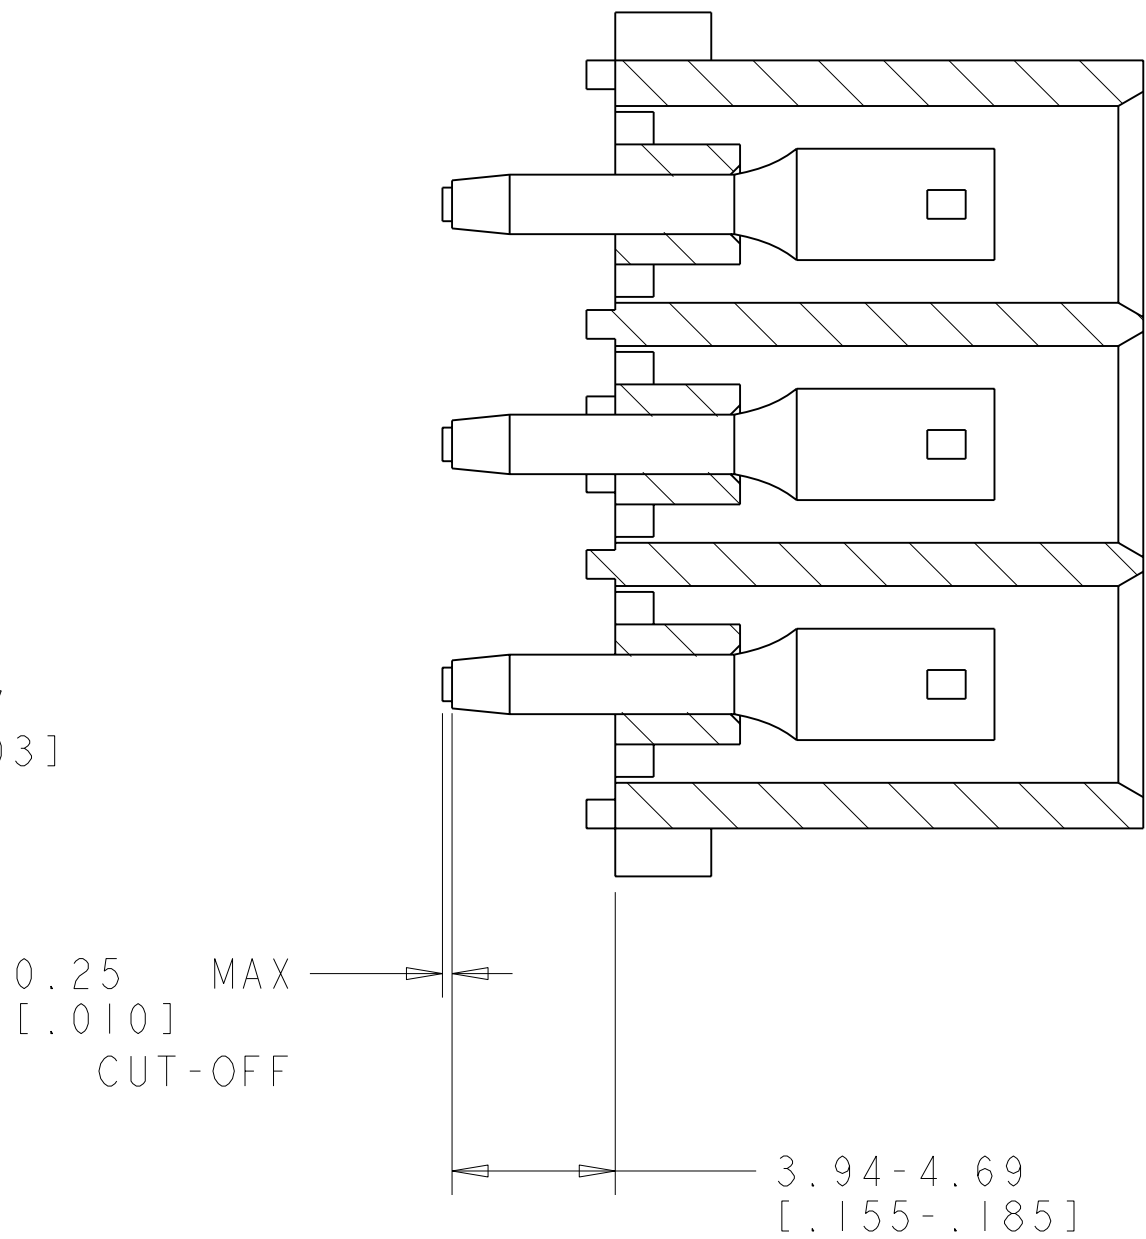

SECTION B-B

7	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0,WHITE	1586682-7
3	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0,WHITE	1586682-3
SOCKET NO OMITTED	SOCKET CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

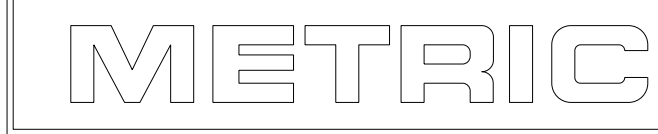

TYP. DIMENSIONS TO CONTROL SEE DISCREPANCY FOR UNPUBLISHED DISCREPANCY IF DISCREPANCY TO CONTROL SEE DISCREPANCY FOR UNPUBLISHED DISCREPANCY SHOULD BE CONTACTED FOR THE UNPUBLISHED DISCREPANCY		DWN K. WHITAKER 03MAY2005	tyco Electronics		Tyco Electronics Harrisburg, PA 17105-3608		
DIMENSIONS: mm[INCHES]		CHK S. RIDGILL 03MAY2005	NAME				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 03MAY2005	PRODUCT SPEC 9 SOCKET HEADER ASSEMBLY, 9 CIRCUIT, SELECTIVELY LOADED, UNIVERSAL MATE-N-LOK (TM)				
0 PLC ±		APPLICATION SPEC					
1 PLC ±		WEIGHT					
2 PLC ±0.13(.005)		CUSTOMER DRAWING					
3 PLC ±		SCALE 5:1					
4 PLC ±		SHEET 1 OF 1					
ANGLES ±40° 30'		REV A					
FINISH SEE TABLE							
MATERIAL SEE TABLE							