
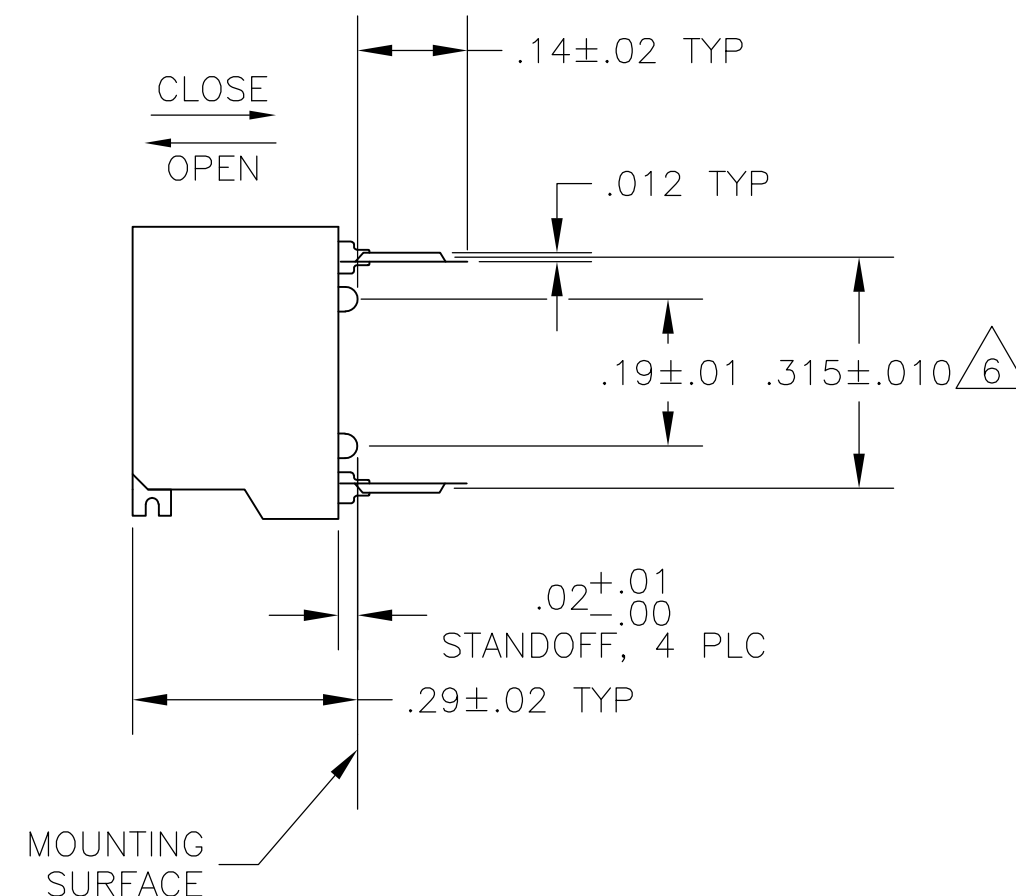
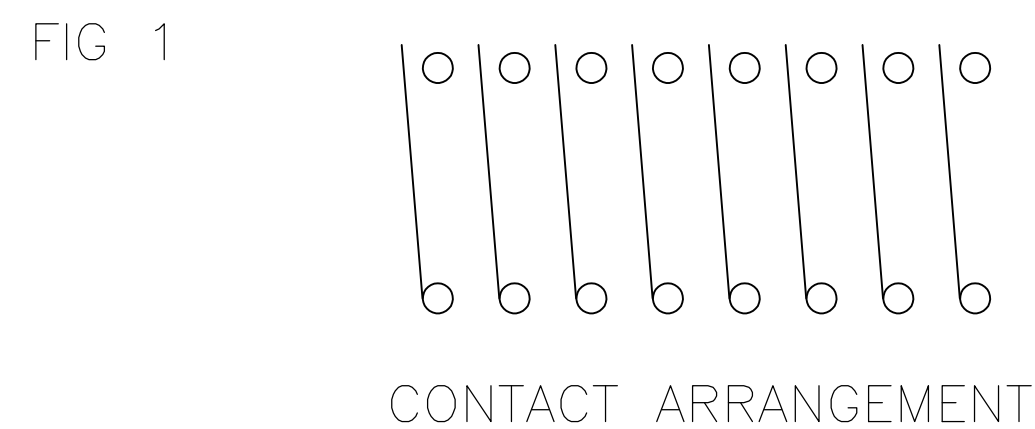
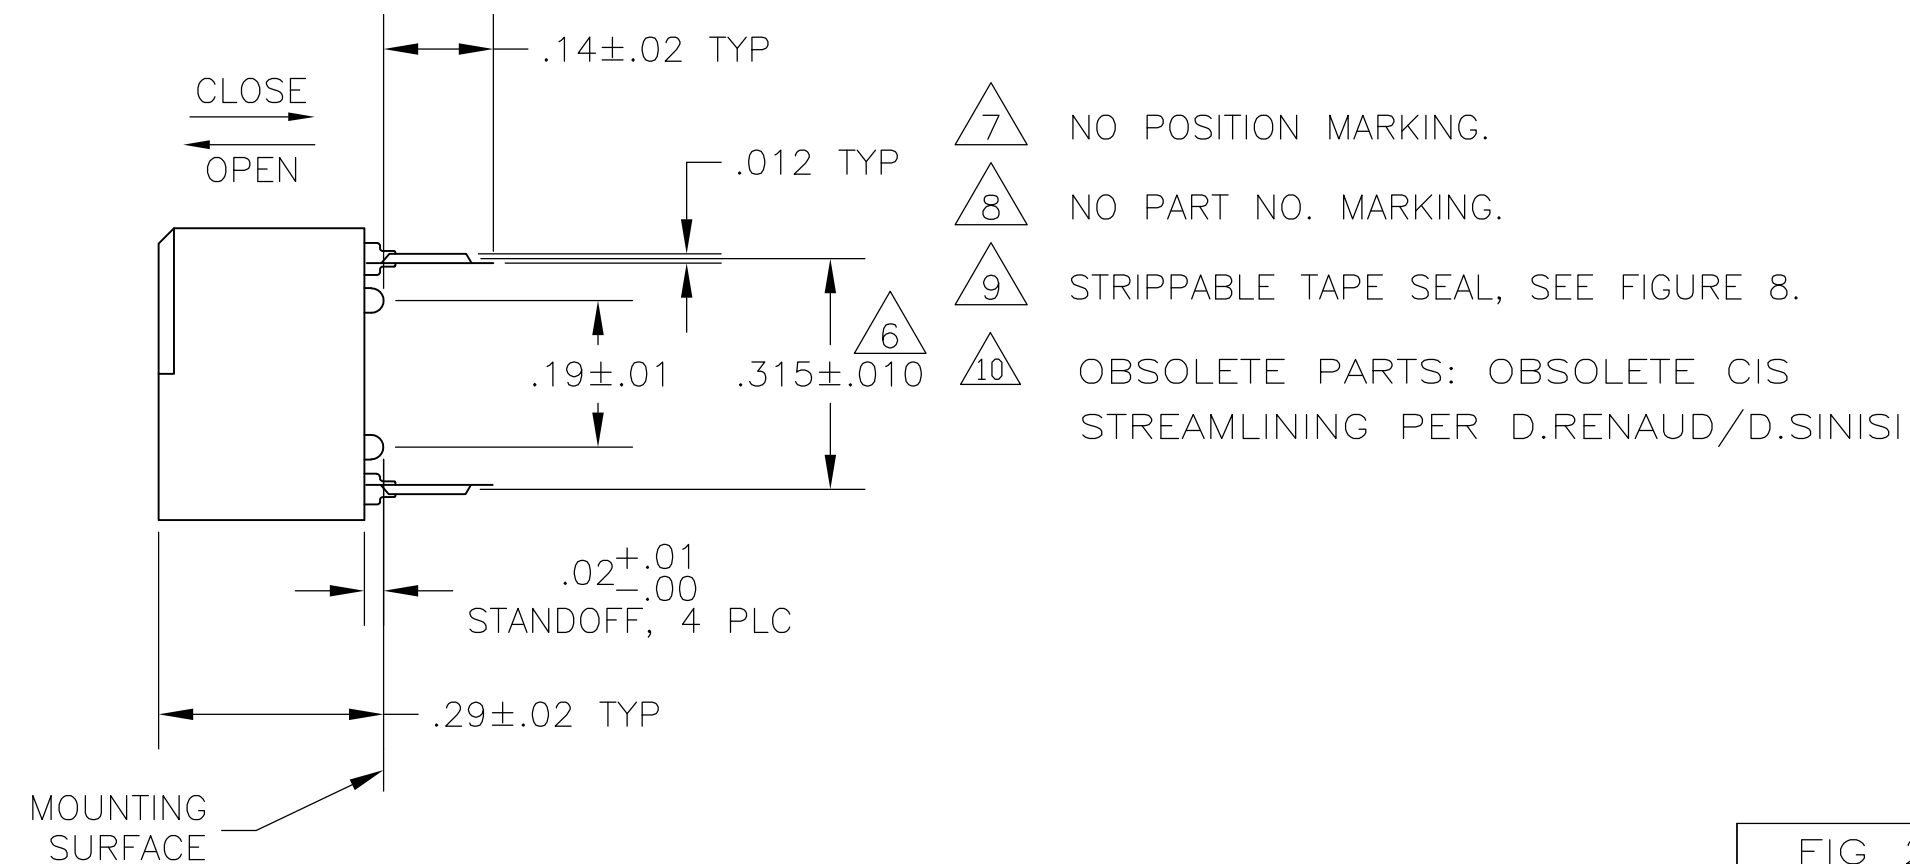
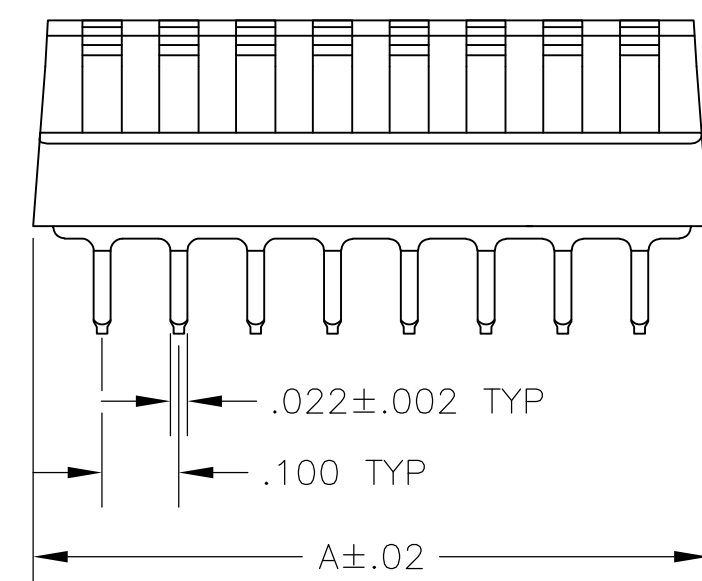
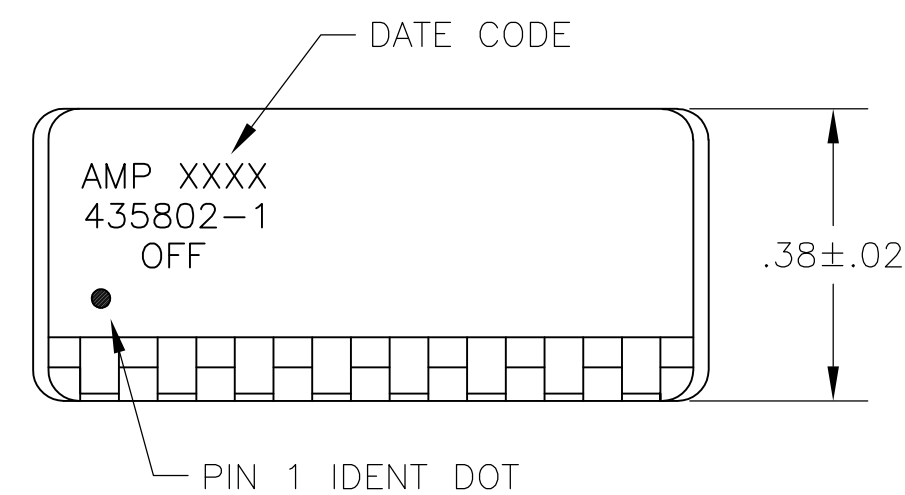
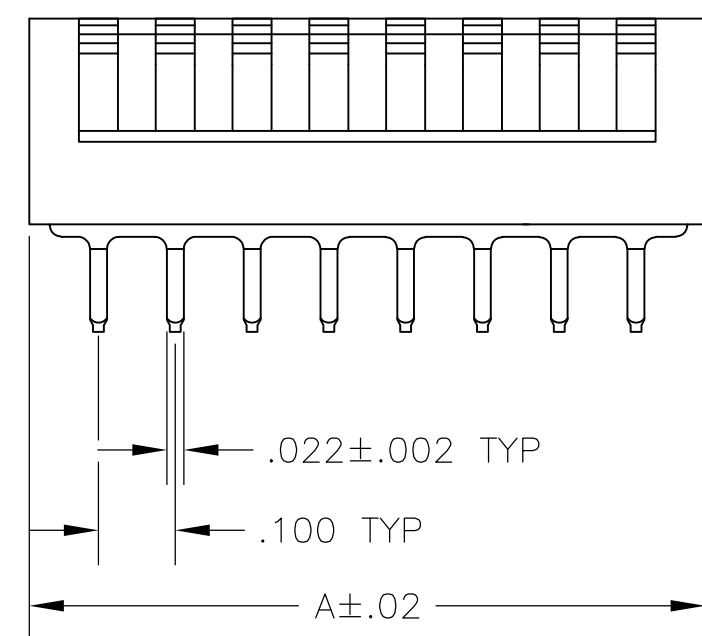
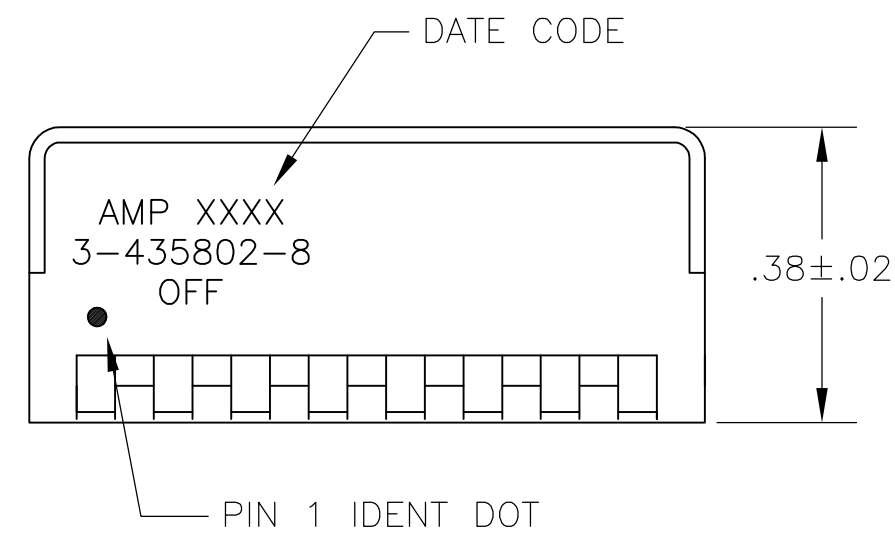


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AL2	REVISED PER ECO-11-004820	11MAR11	RK	HMR



- | | |
|---|--|
|  | NO POSITION MARKING. |
|  | NO PART NO. MARKING. |
|  | STRIPPABLE TAPE SEAL, SEE FIGURE 8. |
|  | OBSOLETE PARTS: OBSOLETE CIS
STREAMLINING PER D.RENAUD/D.SINISI |

- 1 FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- 2 SWITCH SHOWN IN OPEN POSITION.
- 3 ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- 4 STAMPING WILL VARY ON 2 AND 3 POSITION TOPS DUE TO SPACE RESTRICTIONS.
- 5 STRIPPABLE TRANSPARENT SEAL, SEE FIG 6.
- 6 .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300^{+.010}_{-.000} AT MOUNTING SURFACE.

		FIG 2	FIG 3A& 7	—	1.08	10	6-435802-3
		FIG 1	FIG 3B		.88	8	3-435802-8
	SUPSD BY 1-435802-6	—FIG 2	 		.58	5	3-435802-1
	 OBSOLETE	—FIG 2	 		.88	8	3-435802-0
	SUPSD BY 2-5435802-9	—FIG 2	 		.48	4	2-435802-9
	SUPSD BY 1-435802-0	—FIG 1		—	.28	2	2-435802-8
	OBSOLETE	FIG 1			.28	2	2-435802-7
	OBSOLETE	FIG 2			1.08	10	2-435802-6
	OBSOLETE	FIG 2	FIG 4	—	.88	8	2-435802-5
	OBSOLETE	FIG 2			.88	8	2-435802-4
	OBSOLETE	FIG 2	FIG 3A& 5	—	.48	4	2-435802-3
		FIG 2	FIG 3A		1.28	12	2-435802-2
		FIG 2			1.18	11	2-435802-1
		FIG 2			1.08	10	2-435802-0
		FIG 2			.98	9	1-435802-9
		FIG 2			.78	7	1-435802-8
		FIG 2			.68	6	1-435802-7
		FIG 2			.58	5	1-435802-6
		FIG 2			.48	4	1-435802-5
	SUPSD BY 435802-2	—FIG 2			.38	3	1-435802-4
	SUPSD BY 3-1437590-2	—FIG 1	FIG 3B		.28	2	1-435802-3
	 OBSOLETE	—FIG 2		—	1.28	12	1-435802-2
		FIG 1	FIG 3B	—	.28	2	1-435802-0
		FIG 2	FIG 3A		.88	8	435802-9
		FIG 2		—	1.08	10	435802-8
	SUPSD BY 5435802-7	—FIG 2		—	.98	9	435802-7
		FIG 2		—	.78	7	435802-6
		FIG 2		—	.68	6	435802-5
		FIG 2		—	.58	5	435802-4
		FIG 2		—	.48	4	435802-3
		FIG 2	FIG 3A	—	.38	3	435802-2
		FIG 2	FIG 3A	—	.88	8	435802-1
	435802-1 SHOWN	HOUSING	MARKING	PROTECTIVE SEAL	A	NO OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TALLEY 9-19-89		 TE Connectivity	
		CHK R. MILLER 9-19-89			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED	
		APVD H. LEITER 9-19-89			
		PRODUCT SPEC			
		—			
		APPLICATION SPEC			
		—			
MATERIAL HOUSING & ROCKERS: POLYESTER CONTACTS: BERYLLIUM COPPER		FINISH CONTACTS; PLATED .000030 MIN GOLD IN CONTACT AREA OVER .000050 MIN NICKEL		SIZE A2	
		WEIGHT		CAGE CODE 00779	
		—		DRAWING NO C-435802	
CUSTOMER DRAWING				RESTRICTED TO —	
				SCALE 4:1	
				SHEET 1 of 2	
				REV A1 2	

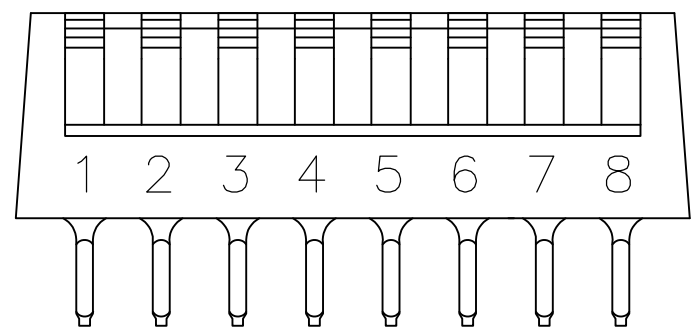


FIG 3A

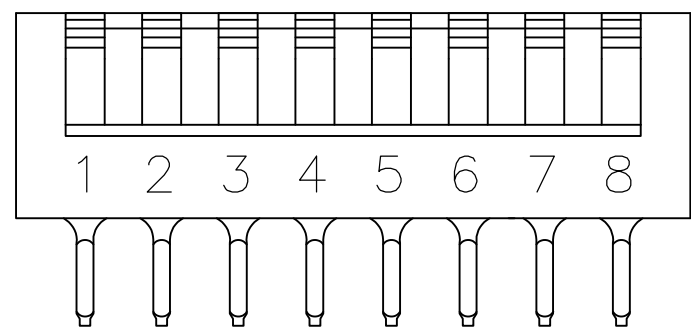


FIG 3B

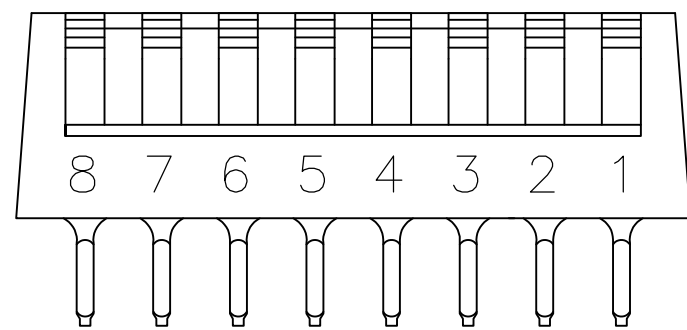


FIG 4


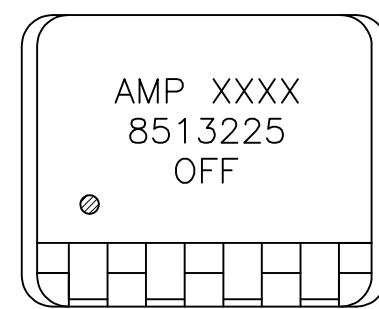


FIG 5

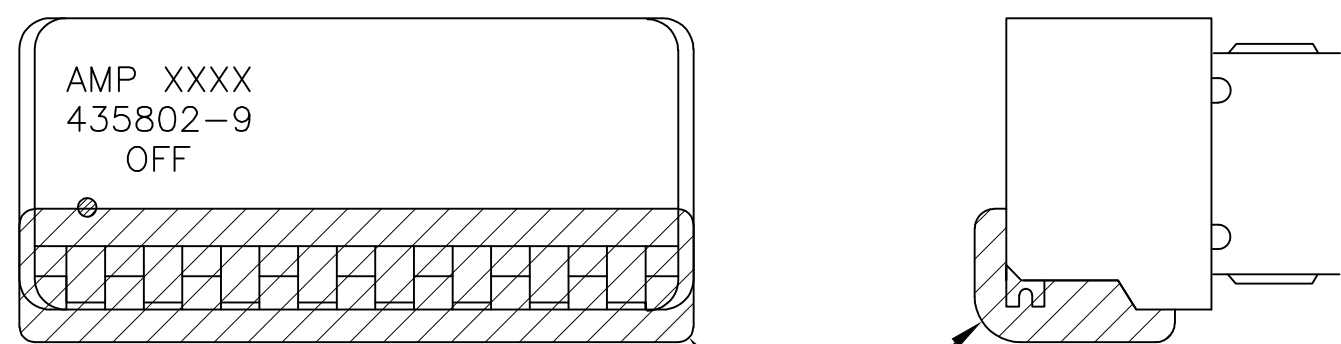

PROTECTIVE SEAL

FIG 6


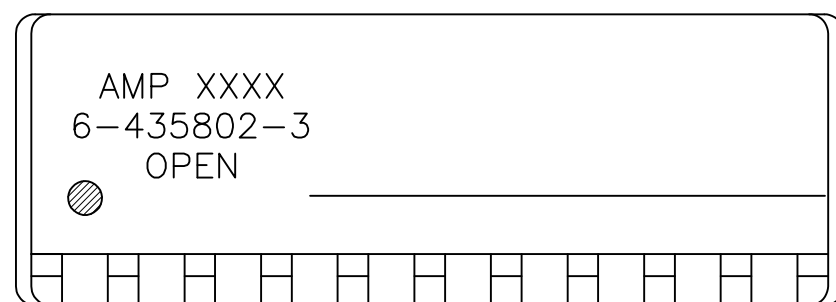


FIG 7

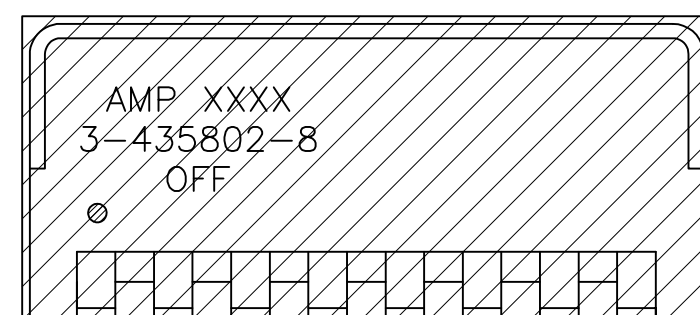

PROTECTIVE SEAL

FIG 8

 $.010 \pm .010$ $.005^{+.010}_{-.005}$
TYP

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN R. TALLEY 9-19-89		 TE Connectivity			
DIMENSIONS: INCHES			CHK R. MILLER 9-19-89					
			APVD H. LEITER 9-19-89		NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED			
			PRODUCT SPEC —					
			APPLICATION SPEC —					
			WEIGHT —					
TOLERANCES UNLESS OTHERWISE SPECIFIED:					SIZE A2	CAGE CODE 00779	DRAWING NO C-435802	RESTRICTED TO —
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± —					SCALE 4:1 SHEET 2 of 2 REV AL2			
FINISH								
MATERIAL								
SEE SHEET 1			SEE SHEET 1		CUSTOMER DRAWING			