
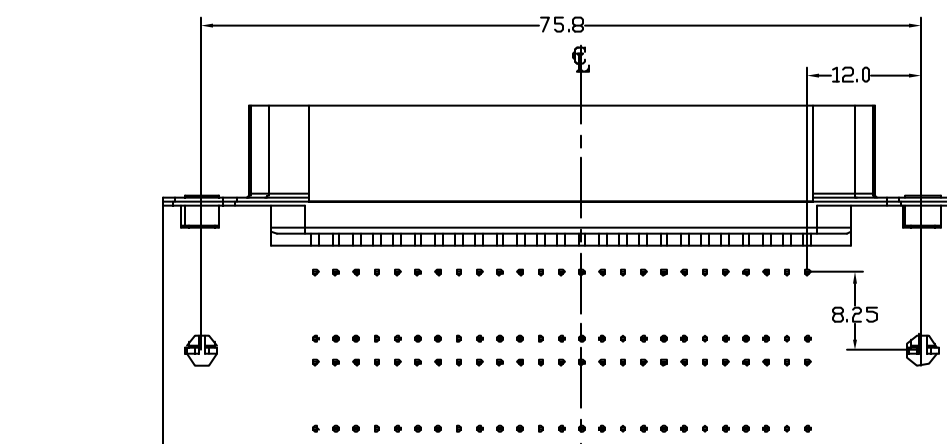
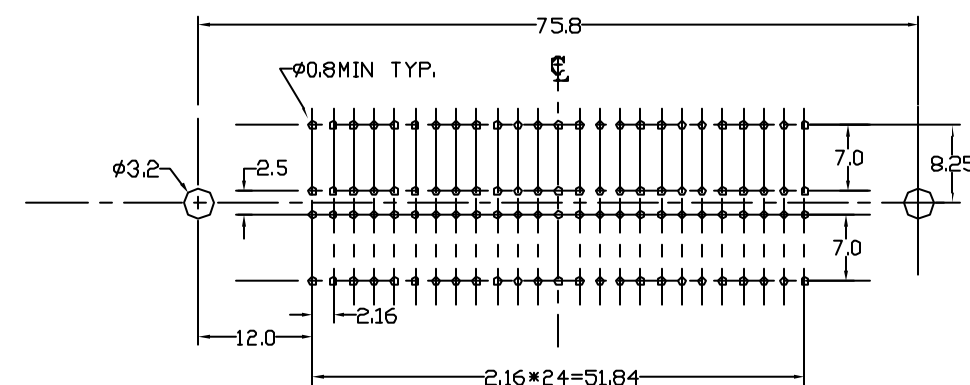
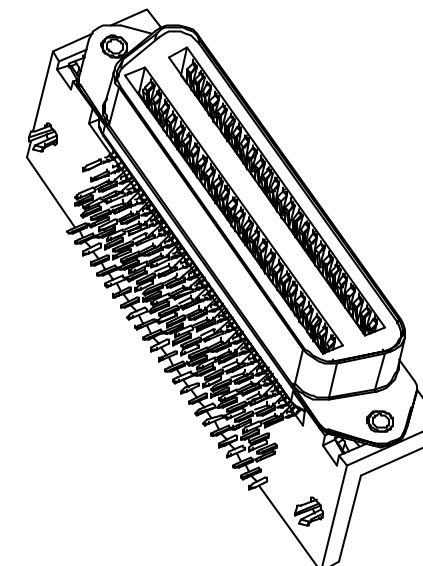
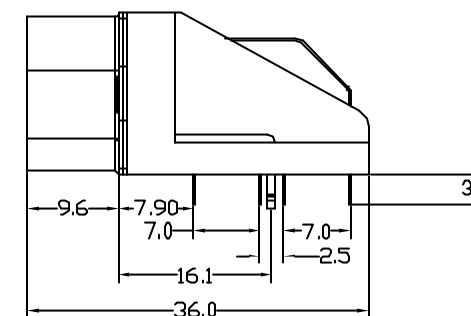


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A4	HK #	RELEASE TO PRODUCTION	10/12/05	IP

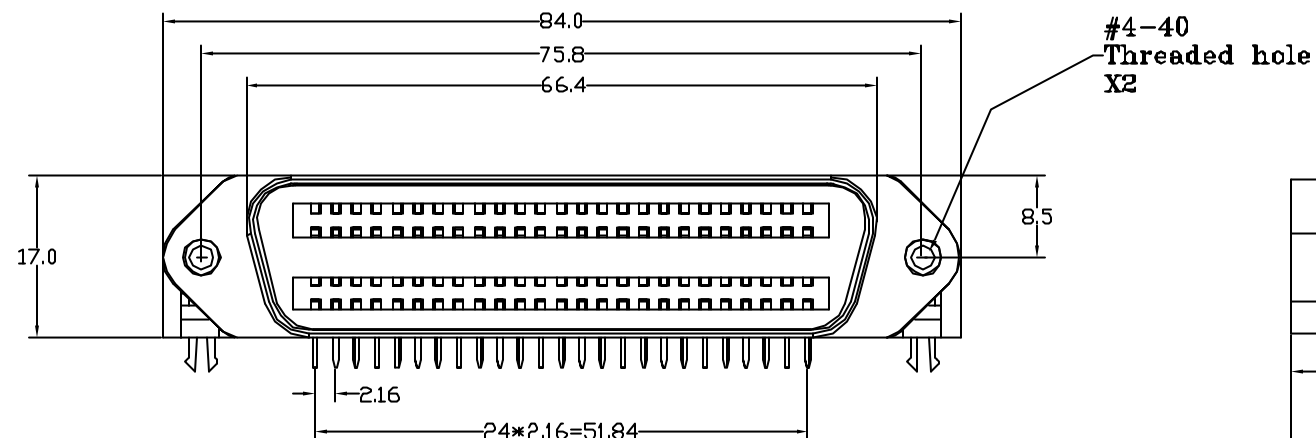

P.C.B. MOUNTING DIMENSIONS


CUSTOMER DRAWING

Series Number _____
F-Female _____
100-100 ways _____
contact plating _____
u" gold mating area,pure matte tin
u" gold mating area,pure matte tin
ld flash mating area,pure matte tin
Tail lenght _____
3-3.1~3.4mm

Housing color/Tial orientation
O-Blue,standard type
B-Black,standard type
R-Blue,reversed type
C-Black reversed type

	Mount type
0-#4-40	screw+B/L
1-#4-40	screw+M3.5
2-spring	latch +B/L
3-spring	latch+M3.5

Voltage Rating.....500V AC (RMS)
Current Rating.....3A/contact
Dielectric Withstanding Voltage.....1200V AC (RMS)
Insulation resistance.....1000M MIN. at 500V DC
Contact Resistance.....35m ohm MAX. at 1A DC
Operation Temperature Range.....-55°C ~ +105°C

ITEM NO		PART OR IDENTIFICATION NO		NOMENCLATURE OR DESCRIPTION		QTY REQ'D	
PARTS LIST							
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC				APPROVAL		DATE	
.X +/- 0.50 .XX +/- 0.30 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 1°				DRAWN XS.GUD		10/13/05	
				CHECKED			
				CHECKED			
FOR MATERIALS AND FINISHES SEE NOTES				DRAWING FILE :		TITLE 57LE RIGHT ANGLE 100 WAYS RECEPTACLE	
				\\DRAWING\957\C957\F100-73B0.DWG			
REMOVE SHARP EDGES				ANGLE OF PROJECTION		SIZE	
DIMENSIONS						DRAWING NO.	
— U.S. —		— INCHES —					
(METRIC)		(MM)					
				A3		C957-F100-73B0	
				SCALE		NONE	
						SHEET 1 OF 1	
						REV.	
						A4	