

6200NTD Series

Tubeaxial

Ø 172x51mm TURBOFAN





■ DC electronic fan with 3 phase EC drive and fully integrated operating electronics. For load-dependent speed control with highly intelligent motor management and power and speed reserves which open up completely new areas of application.

■ Mounting from either face using two 4.3 mm holes.

■ Metal fan housing, impeller of fiber-glass reinforced plastic PA.
 ■ Air exhaust over struts. Rotational direction CCW looking at rotor.
 ■ Electrical connection via leads. Housing ground lug for screw M4 x 8 (TORX).
 ■ UL, CSA, VDE approvals on some models, please contact application engineering.

	Part Number	Curve	CFM @ 0	VDC	Volt. Range	Power (W)	dBA	Max Amb. Temp C	Bearing Type	Features	Speed (RPM)	Wgt. (lbs)
min	6224NTD	1	53.0	24	16 to 28	2.0	18	60	Ball	Leads	800	1.81
max		2	353.1			50.0	65				5100	
min	6248NTD	1	53.0	48	40 to 55	2.0	18	60	Ball	Leads	800	1.81
max		2	353.1			50.0	65				5100	

Temperature control available upon request.
 Speed setting via control voltage or PWM signal available upon request.

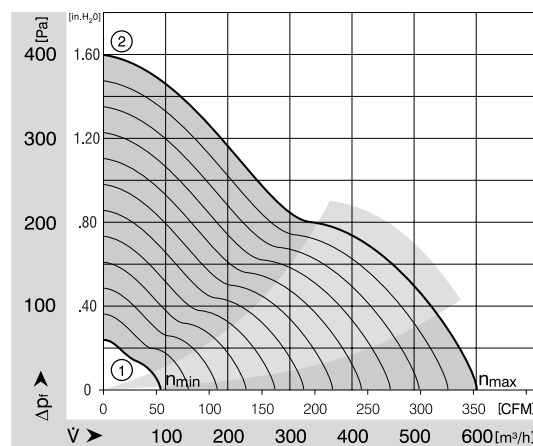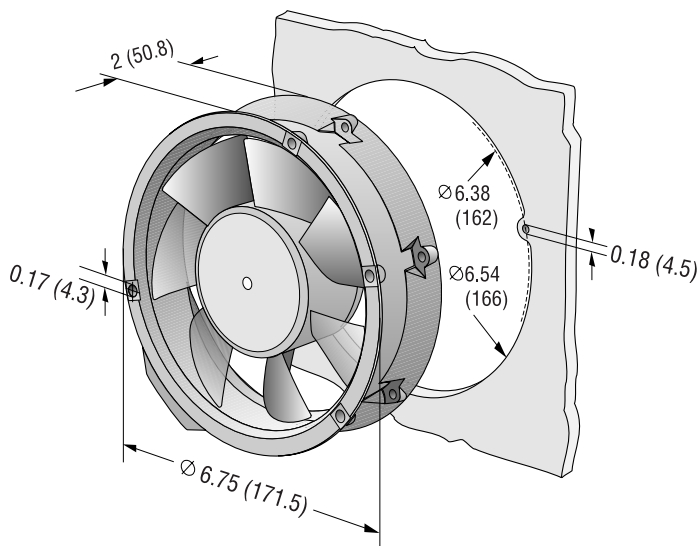

ebmpapst

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2006 © ebm-papst Inc. reserves the right to change any specifications or data without notice