


SPECIFICATION CONTROL DRAWING			0024A0524
CHEMINAX	100 OHM, AWG 24, 19 STRANDS OF AWG 36, TWINAXIAL CABLE	Date	2-14-12
		Revision	A
THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.			
CONSTRUCTION DETAILS		ELECTRICAL CHARACTERISTICS	
<div>DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.</div> <div></div> <div>CONDUCTORS AWG 24, 19 Strands of AWG 36, Silver-Coated High-Strength Copper Alloy</div> <div>DIELECTRICS Rayfoam H Colors - Light Blue/White</div> <div>FILLERS Radiation-Crosslinked Modified ETFE</div> <div>SHIELD AWG 38, Tin-Coated Copper</div> <div>JACKET ETFE</div>		CHARACTERISTIC IMPEDANCE 100 ± 7 ohms, Method C at 1 MHz	
		MUTUAL CAPACITANCE 13.5 pF/ft. (nominal)	
		VELOCITY OF PROPAGATION 76% (nominal)	
ADDITIONAL REQUIREMENTS			
ELECTRICAL			
CONDUCTOR RESISTANCE 26.5 ohms/1000 ft. (nominal)			
INSULATION RESISTANCE 10,000 megohms (minimum) for 1000 ft.			
JACKET FLAWS			
SPARK TEST 1.0 kV (rms)			
IMPULSE TEST 6.0 kV (peak)			
VOLTAGE WITHSTAND (DIELECTRIC) 1000 volts (rms) (minimum)			
ENVIRONMENTAL			
FLAMMABILITY Method B			
LOW TEMPERATURE-COLD BEND -55°C/4.00 inch mandrel			
VOLTAGE WITHSTAND (Post Environmental) 1000 volts (rms), 1 minute			
PHYSICAL			
INSULATION (DIELECTRIC) (Prior to Cabling)			
ELONGATION 50% (minimum)			
TENSILE STRENGTH 600 lbf/in ² (minimum)			
JACKET			
ELONGATION 150% (minimum)			
TENSILE STRENGTH 5000 lbf/in ² (minimum)			
JACKET THICKNESS .008 inch (nominal)			
SHIELD COVERAGE 90% (minimum)			
WEIGHT 15.8 lbs/1000 ft. (nominal)			
Outer jacket color will be white (designated by a "-9" appended to the part number, e.g. 0024A0524-9) unless otherwise specified.			
Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.			
Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.			
Page 1 of 1	Rayfoam, Cheminax, Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.		

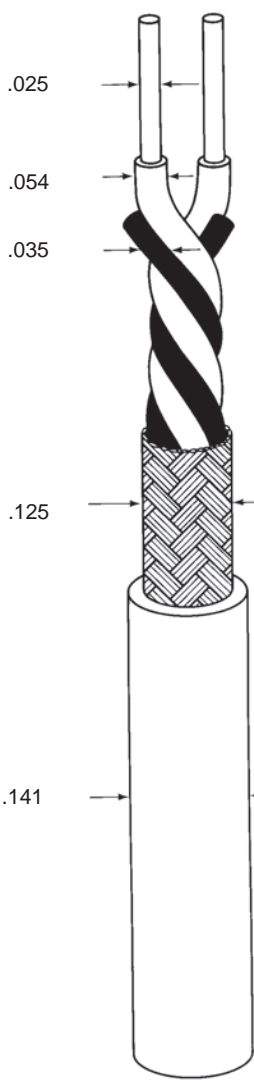

Raychem Wire & Cable
501 Oaks Avenue
Redwood City, California 94063-3800
1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.