

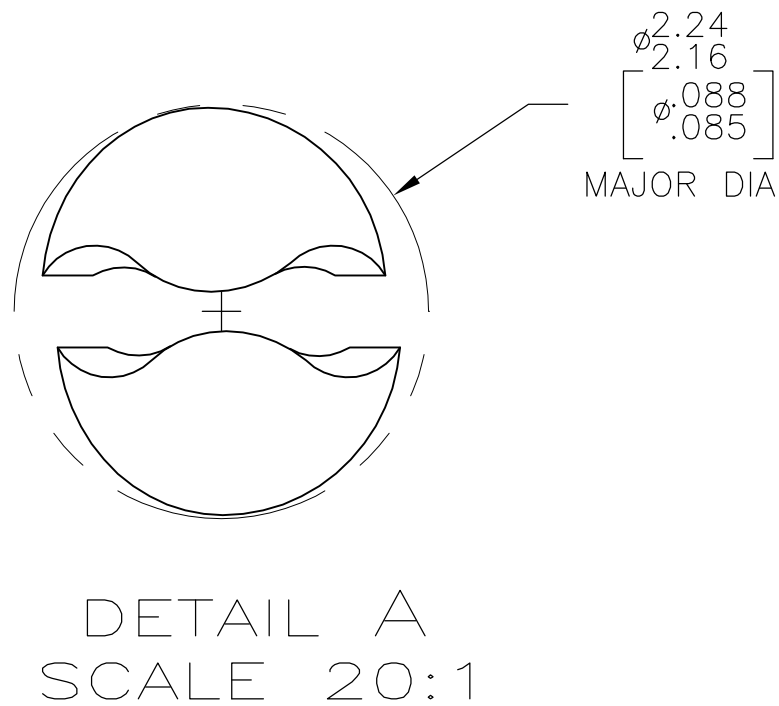
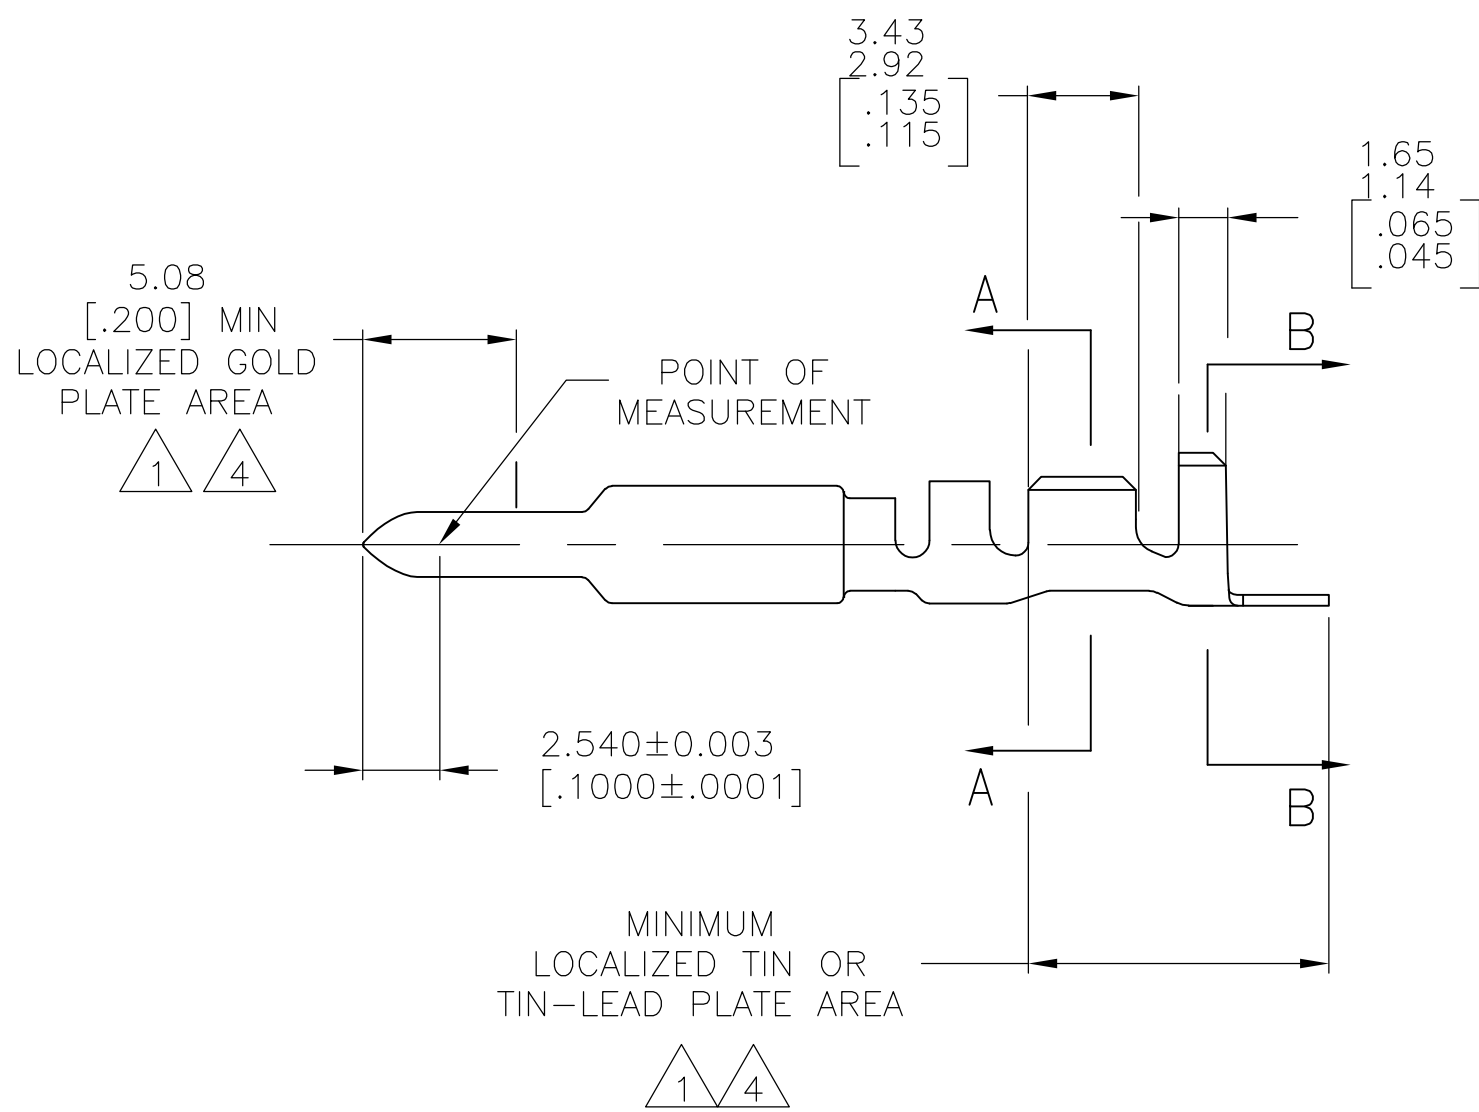
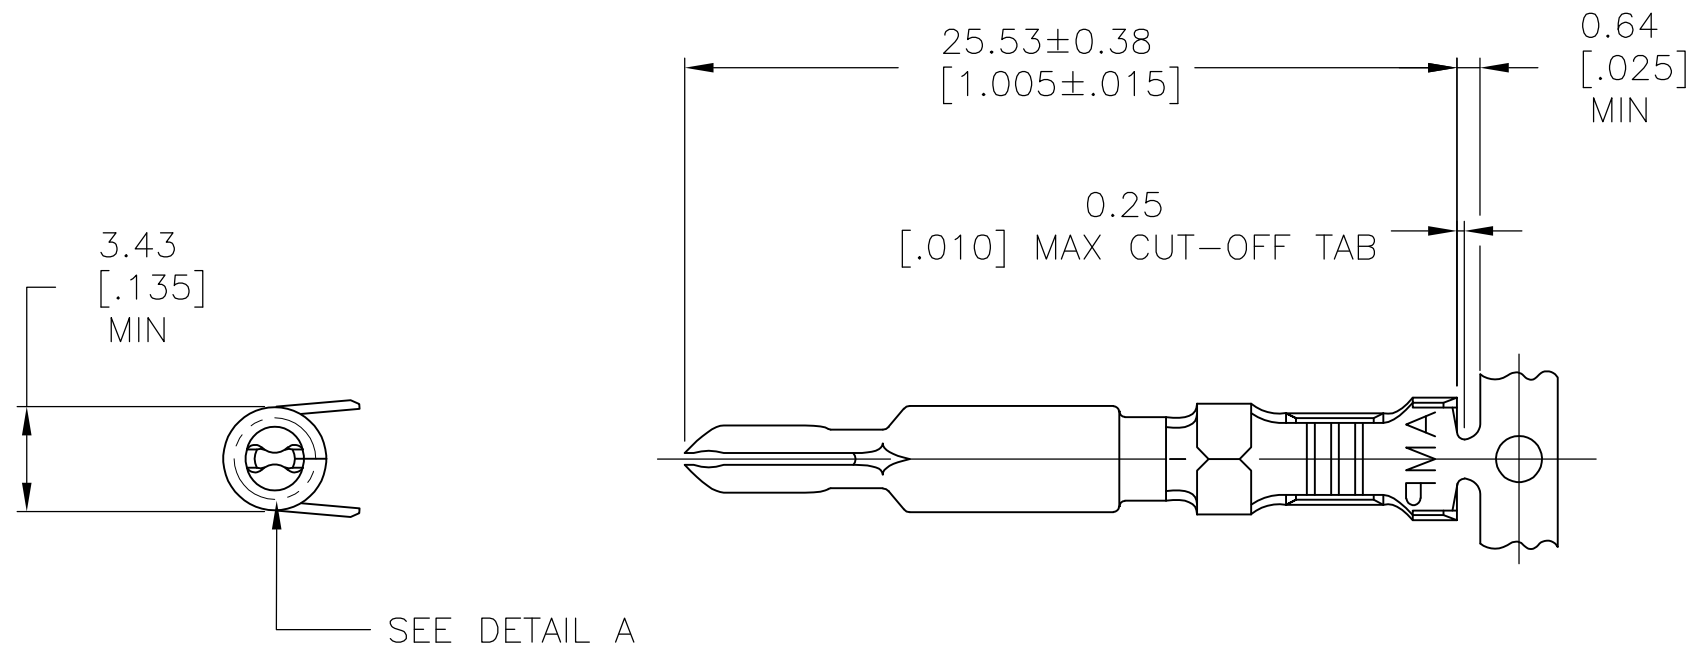


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		G	REVISED PER ECR-13-008204	10DEC2013	KH	TM

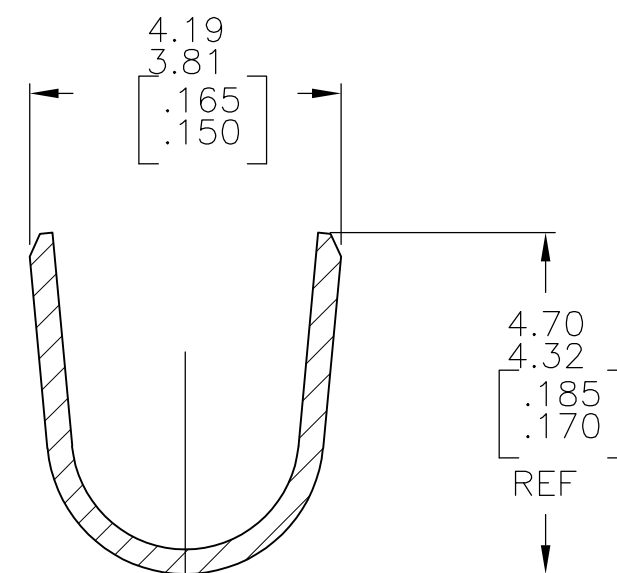

- 1 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 2 WIRE RANGE: 0.5–2mm² [20–14 AWG] INSULATION RANGE: 1.52–3.30 [.060–.130] DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 5 SUPERSEDED BY 1-770007-0

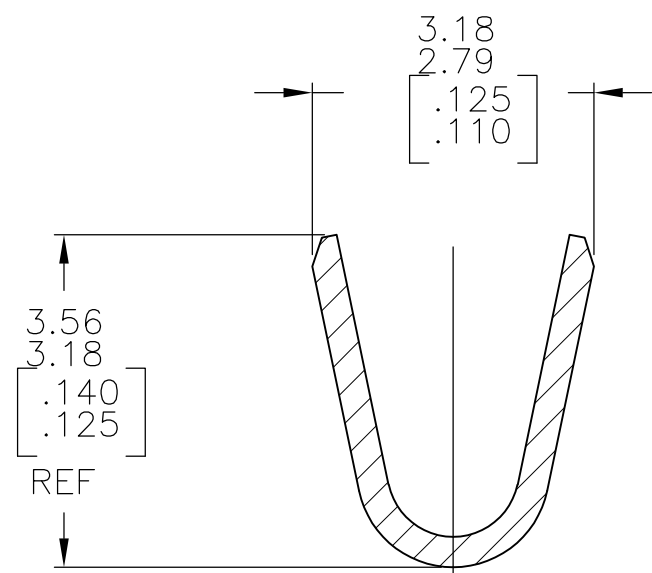

5	GOLD	4	0.30	[.012]	BRASS	1-770007-0
	GOLD	1	0.30	[.012]	BRASS	-770007-2-
	PRE-TIN		0.30	[.012]	BRASS	770007-1
FINISH		MATERIAL			PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER CHK C. JONES APVD C. JONES	20MAY03 20MAY03 20MAY03	 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PIN, UNIVERSAL MATE-N-LOK(TM) II			
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE TABLE		SEE TABLE		WEIGHT	A2	00779	C-770007
CUSTOMER DRAWING				SCALE		SHEET	REV
				4:1		1 of 1	G