




TOP VIEW

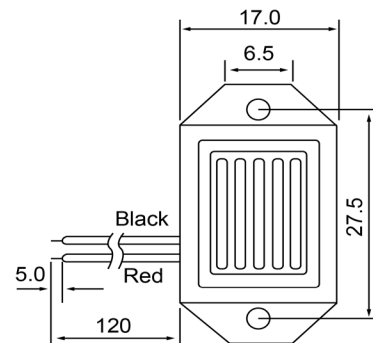

SIDE VIEW

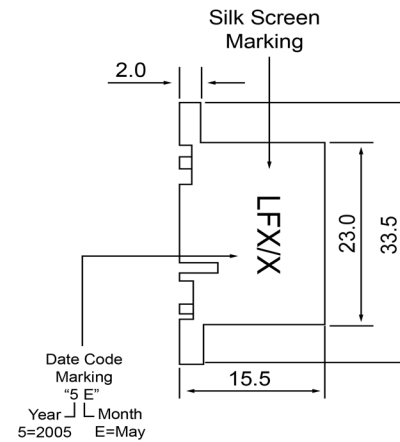

Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS <div> DB UNLIMITED</div>	1	Released from Engineering		10/21/2013	J.S		
Resonant Frequency	400	(Hz)								
Rated Voltage	3	(V)								
SPL @ 10cm	70	(dBA)								
Tone	Single Tone									
Mount Type	Flange									
Voltage Range	2 ~ 4	(V)								
Max Rated Current	3	(mA)								
Housing Material	ABS									
Operating Temperature	-10 ~ +60	°C								
Storage Temperature	-20 ~ +70	°C								
Weight	10	(g)								
					Drawn by	Date	Checked by	Date	Approved by	Date
					A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
				Electro-Mechanical Indicator		IE330403-1				