

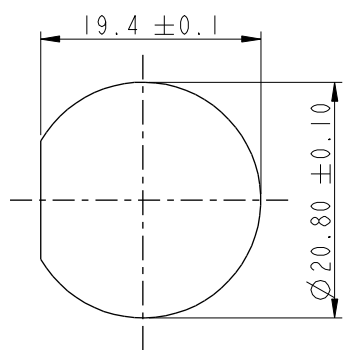
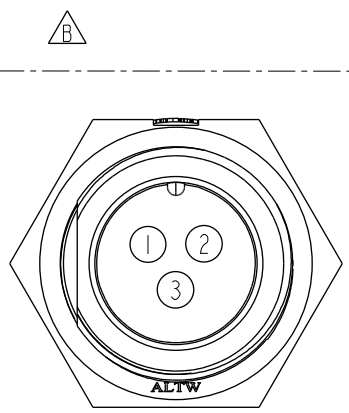

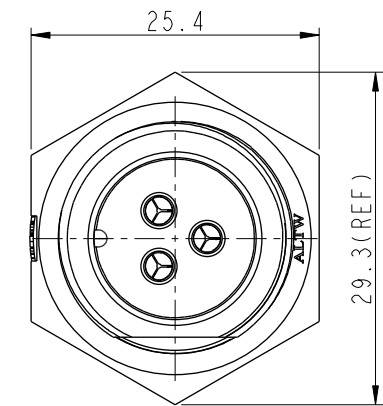


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1770186	2017/07/13	Lingpeng	Modify The Pin Assignments Front View
C	CI90348	2019/03/06	Vicky	Change Note

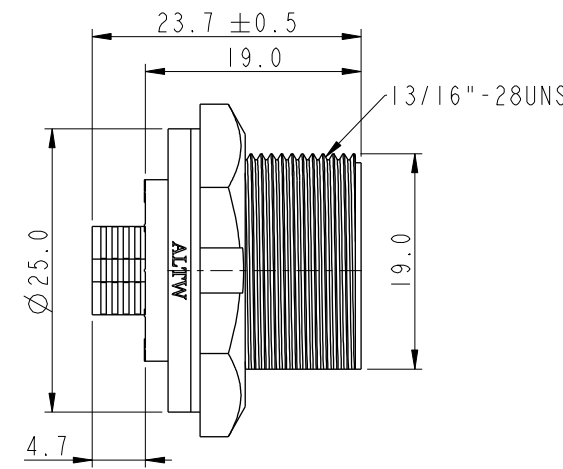

Recommended Panel
Cut-Out



Pin Assignments
Front View

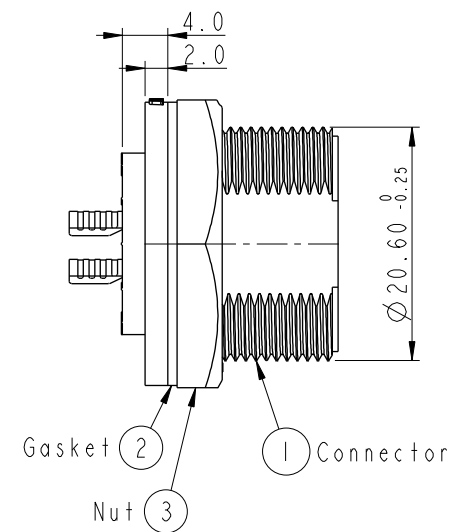

- Note:**
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated.
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Nut: Thermoplastic, Black.
 - * Gasket: Rubber, Gray.
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.3mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
 - * Gasket and Nut are packed separately
in PE bags. (Gasket/Nut 不組裝, 散裝出貨)

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		MIDDLE		ACC-03PMMS-SC7001		Vicky		2019-03-06	
.XXX ±0.05		ANGLES ±1°		PANEL SCREW 3PIN M CONN M PIN		DWG NO		CHECKED BY		DATE	
SCALE 3:2		SIZE A4		SHEET 1 OF 1		ACC-03PMMS-SC7001		Rita		2019-03-06	
REV. C		WC-REV. A.2		QC: Inspection item		CUSTOMER		APPROVED BY		DATE	
						ALTW		Max		2019-03-06	

Amphenol LTW
安費諾亮泰企業股份有限公司