

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

- N/A -

© COPYRIGHT N/A By -

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
-	-		S2	REVISED PER ECO-12-009804	22JUN12	PY DM

D

C

B




A

D

C

B

A

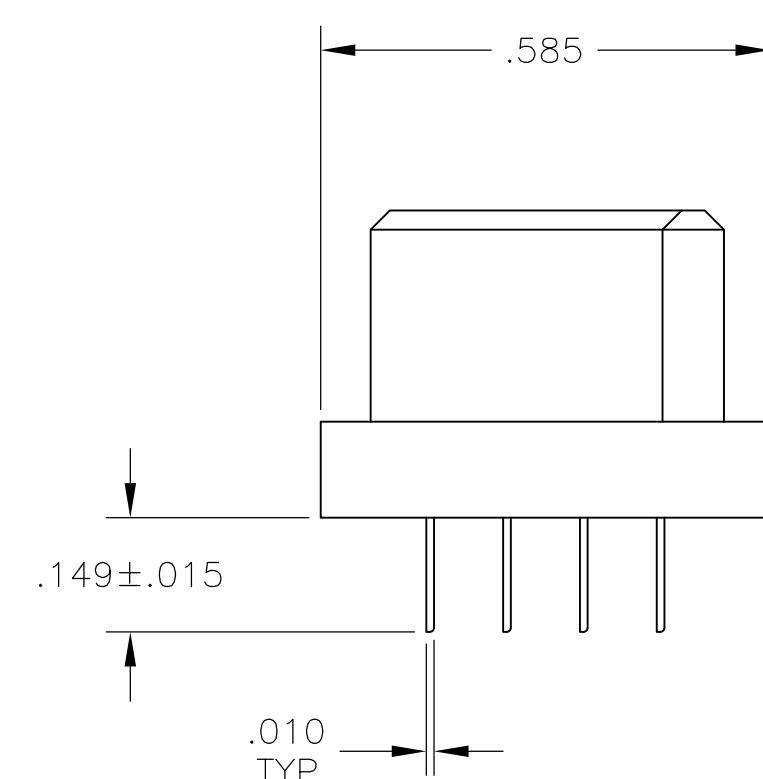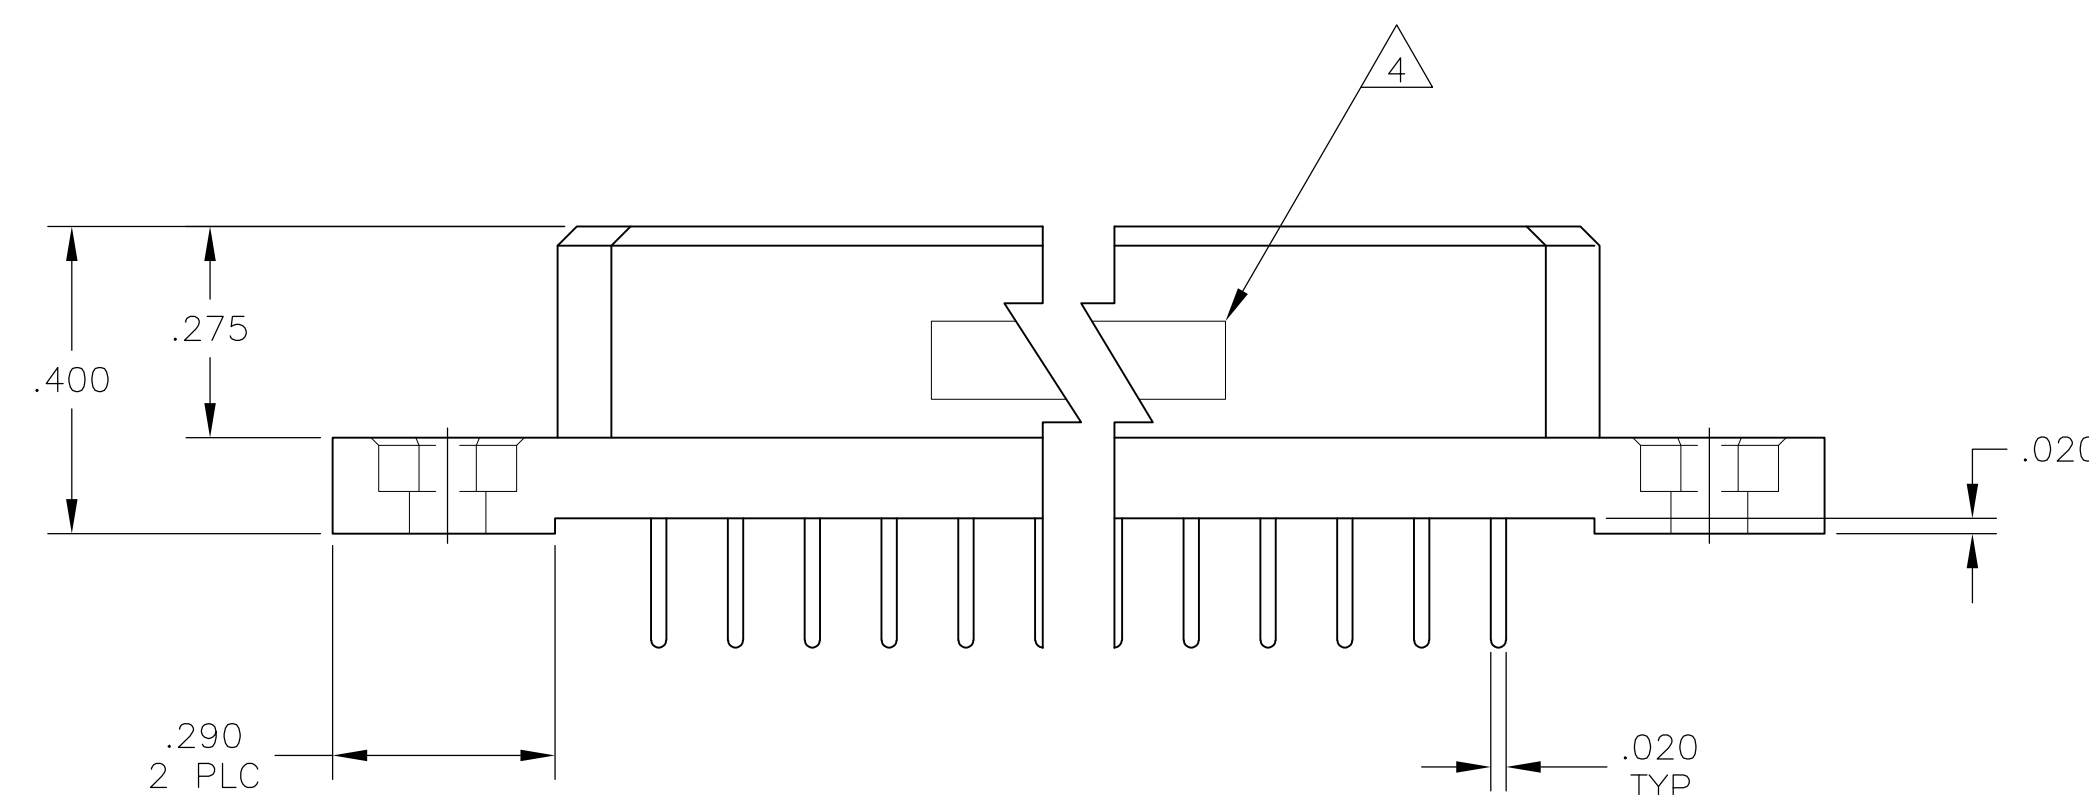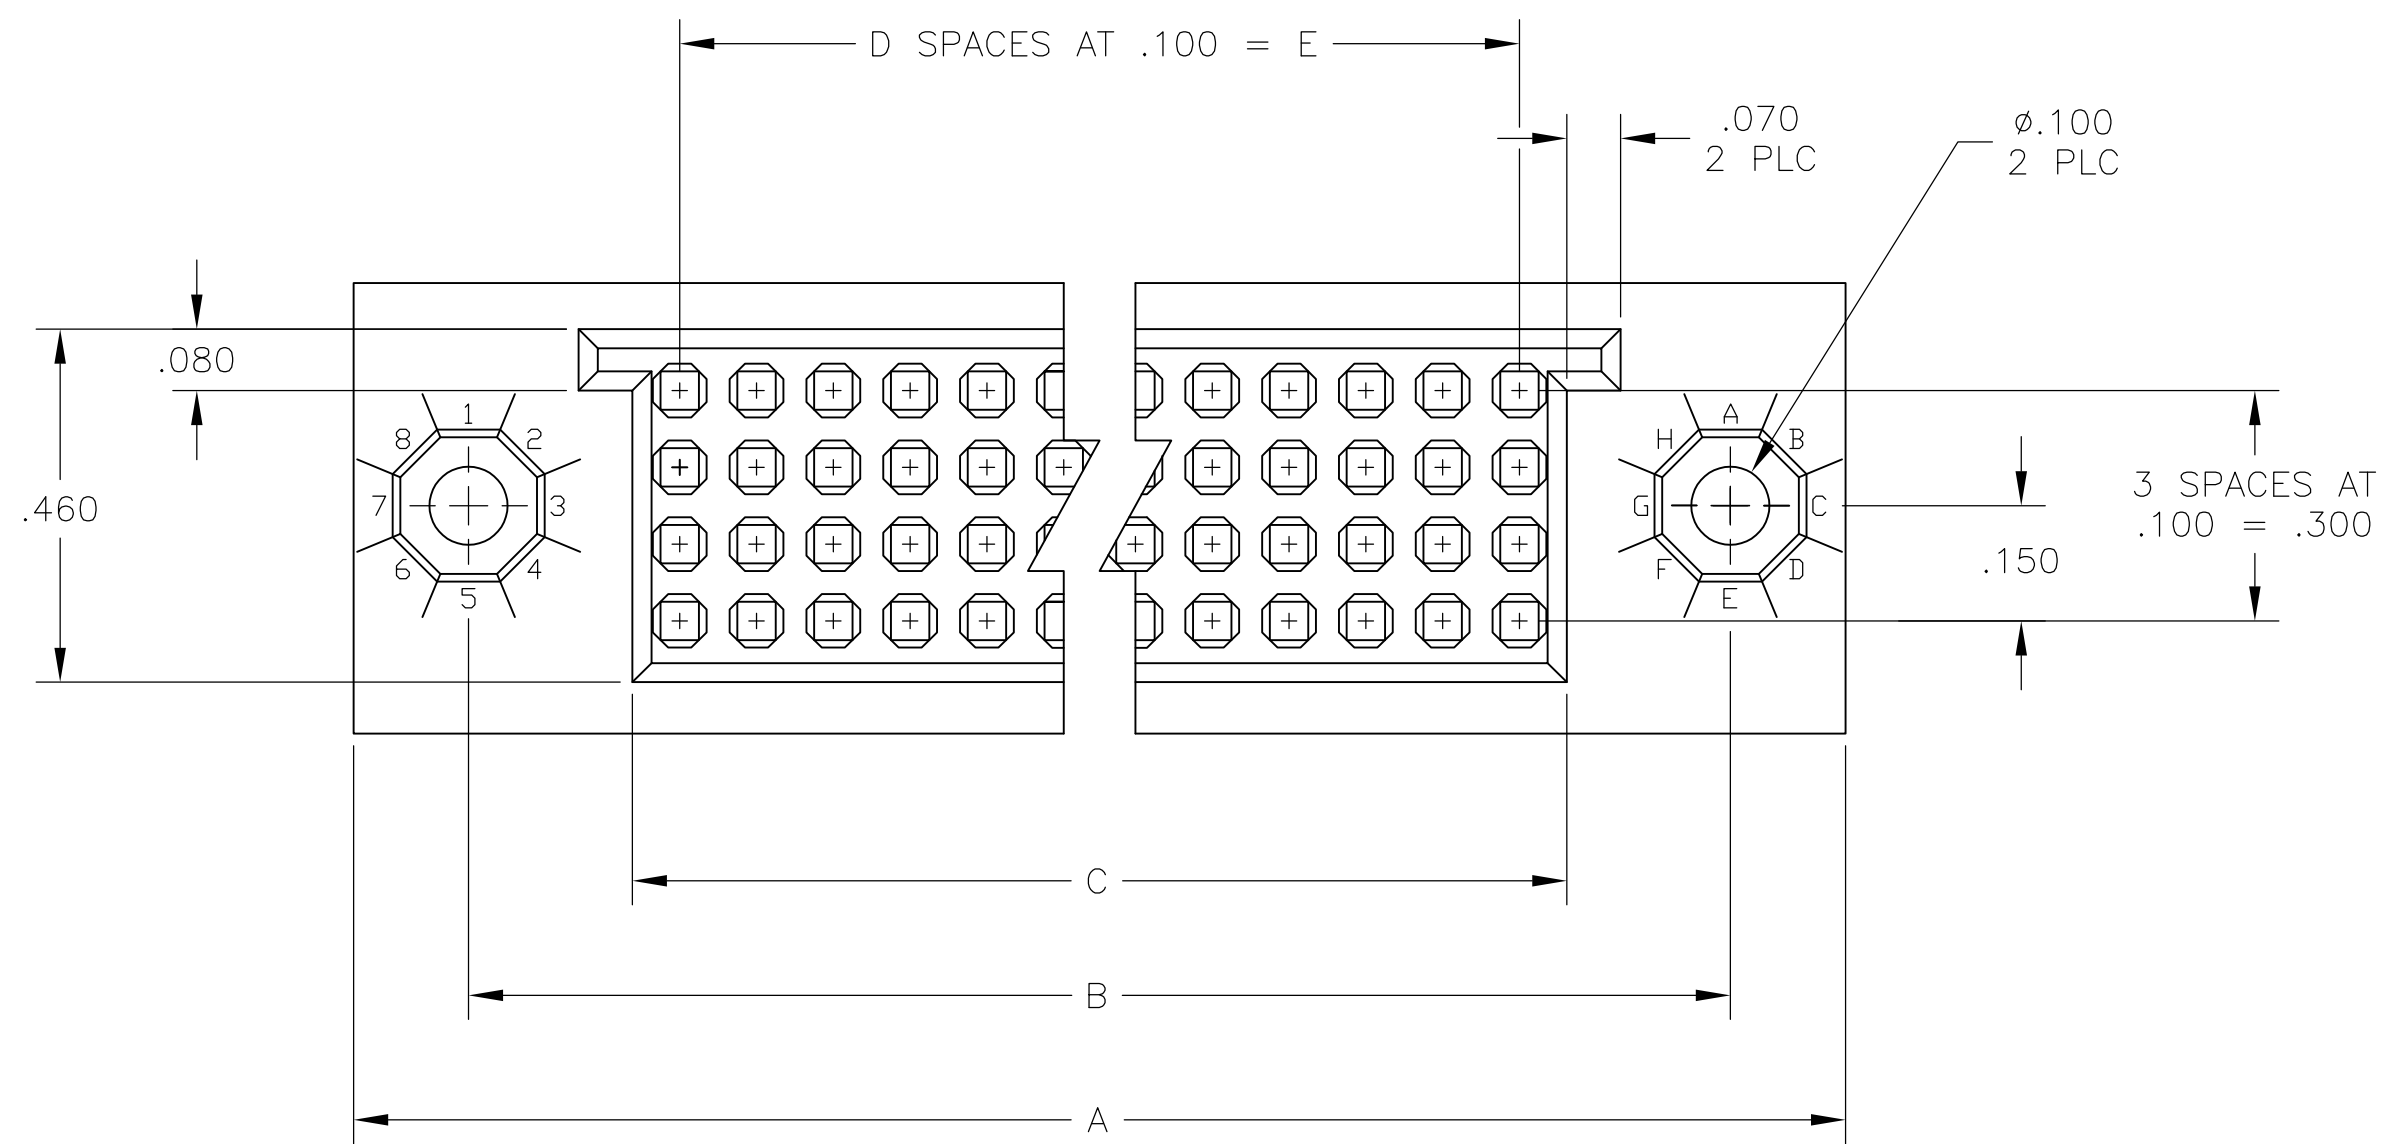

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-
FINISH	-	

APVD

29-OCT-84

L. CASTAGNA

29-OCT-84

L. CASTAGNA

29-OCT-84

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

DWN

29-OCT-84

R. SEIFRIED

29-OCT-84

L. CASTAGNA

29-OCT-84

L. CASTAGNA

29-OCT-84

NAME

RECEPTACLE ASSEMBLY
BOX II, 4-ROW
W/.149 SOLDER TAILS

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=533285

RESTRICTED TO

-

SCALE

4:1

SHEET

1 of 2

REV

S2

533285

1

HOUSING MATERIAL: POLYPHENYLENE SULFIDE.
COLOR: NATURAL (BROWN).

2

CONTACT MATERIAL: BERYLLIUM COPPER OR COPPER-NICKEL-SILICON
PER UNS C70260.

3

CONTACT FINISH: NICKEL UNDERPLATE .000050-.000100 THK ALL OVER
GOLD .000030 THK IN CONTACT AREA.
TIN-LEAD PLATED SOLDER TAILS.

4

TE, PART NO. & DATE CODE MARKED IN THIS APPROXIMATE AREA.

5

CONTACT FINISH: NICKEL UNDERPLATE .000050-.000100 THK ALL OVER
GOLD .000030 THK IN CONTACT AREA.
TIN PLATED SOLDER TAILS.

Technical drawing of a component showing dimensions and tolerances. The drawing includes a top view and a side view. Key dimensions and tolerances are labeled:

- Overall width: B
- Overall height: E
- Top view dimensions: .275 TYP, .100 TYP
- Side view dimensions: .100, .150, .200, .300
- Top view hole diameters: $\phi.043$ TYP, $\phi.037$
- Top view hole position: $\phi.006(M)$
- Side view hole diameters: $\phi.120$, 2 PLC
- Side view hole position: $\phi.006(M)$

		-	SEE SHEET 1	-	-	-	
5	7.400	74	7.524	7.950	8.250	300	6-533285-2
5	6.400	64	6.524	6.950	7.250	260	6-533285-0
5	5.900	59	6.024	6.450	6.750	240	5-533285-9
5	4.900	49	5.024	5.450	5.750	200	5-533285-7
5	4.400	44	4.524	4.950	5.250	180	5-533285-6
5	3.900	39	4.024	4.450	4.750	160	5-533285-5
5	3.400	34	3.524	3.950	4.250	140	5-533285-4
5	3.100	31	3.224	3.650	3.950	128	5-533285-3
5	2.900	29	3.024	3.450	3.750	120	5-533285-2
5	2.400	24	2.524	2.950	3.250	100	5-533285-1
3	5.700	57	5.824	6.250	6.550	232	3-533285-5
OBSOLETE							
			</				