


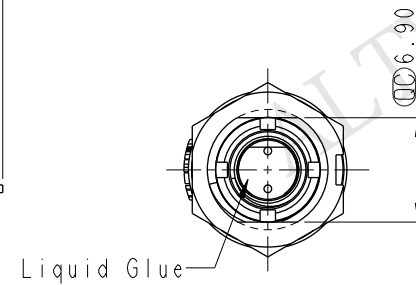
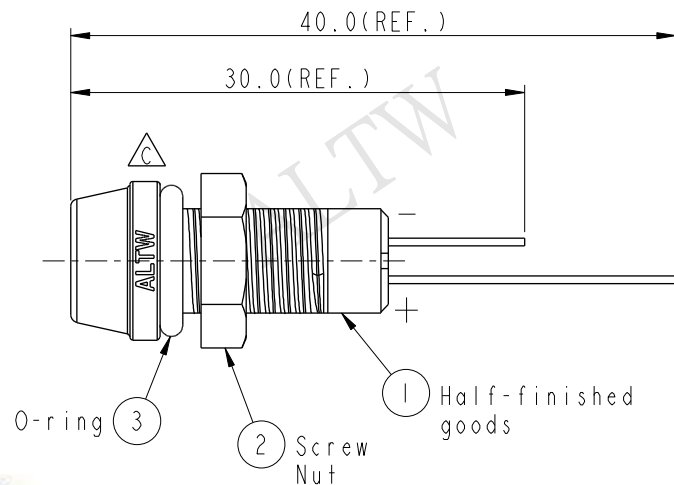



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-930481	2009/03/04	ZhaoRongFu	Add Waterproof Rate
C	LEN1650671	2016/05/18	Ruru	Change Logo

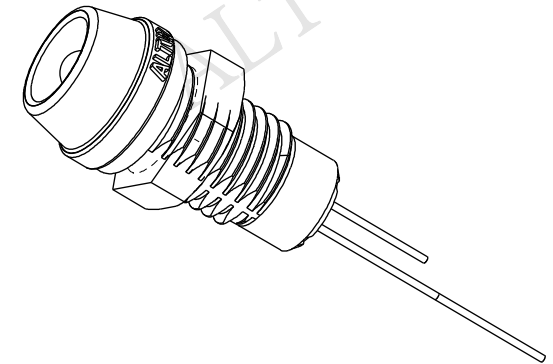


Recommended Panel Cut-Out

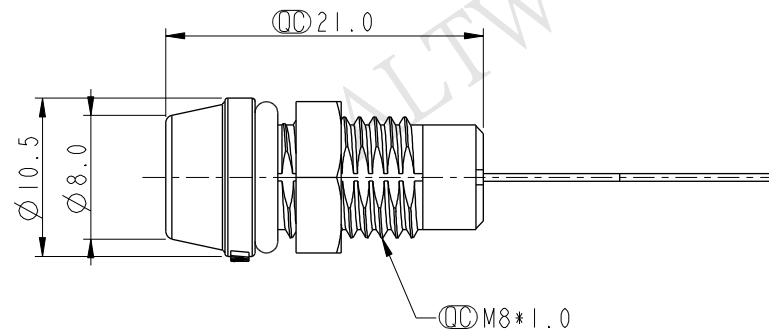

Notes:

- * **Important Dimension To Check**
- * Waterproof Rate: IP67
- * LED Holder: PC+ABS, Black
- * LED: $\varnothing 3$ mm, Yellow (高亮度)
- * O-ring: EPDM, Black
- * Screw Nut: Nylon+GF
- * Operating Voltage: DC 4V
- * Operating Temperature: -40~+80°C
- * For Panel Thickness 6.5mm Max.



UNIT:mm			TITLE Ø 3mm Plastic LED,Yellow			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO L08-0IYAAS-PR700I		DRAWN BY Ruru		DATE 2016-05-18			
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1						SIZE A4	SHEET 1 OF 1	DWG NO L08-0IYAAS-PR700I		CHECKED BY Rita		DATE 2016-05-18	
		REV. C	WC-REV. A.2	(QC):Inspection item	CUSTOMER ALTW			APPROVED BY Lisa		DATE 2016-05-18					
		2		3		4		5		6		7		8	
														FMM10702-01-02A1	