

6

5

4

3

2

1

E

E

D

D

C

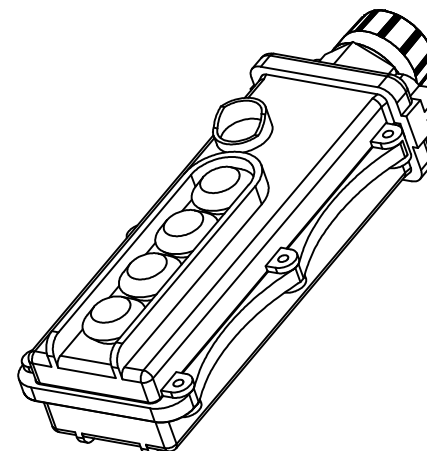
C

B

B

A

A

STAINLESS STEEL
SUPPORT RINGSF3 MAX-LOC
NUTSTAINLESS
STEEL
SCREWSSHROUDED
KNOCK-OUT
HOLE FOR
OPTIONAL
PILOT LIGHT
OR HORN BUTTON1.18 [30.0]
REF.
BETWEEN
CENTERS3.52 [89.4]
REF.2.31 [58.7]
REF.9.77 [248.2]
REF.

ORDER NO.	WOODHEAD NO.	SPEED SWITCHES
1301260249	5054-1M*	1
1301260252	5054-2M*	2
1301260255	5054-3M*	3
1301260248	5054-1	1
1301260251	5054-2	2
1301260254	5054-3	3
1301260250	5054-1N*	1
1301260253	5054-2N*	2
*****	5054-3N*	3

*M = WITH MOMENTARY ON/OFF SWITCHES
N = WITH MAINTAINED ON/OFF SWITCHES

NOTES:

- PENDANT HOUSING: POLYCARBONATE
- COMMON CIRCUIT IS PRE-WIRED ON ALL SWITCHES TO SIMPLIFY WIRING
- EASILY REMOVABLE BUTTON HOODS AND NAMEPLATES
- CORD DIAMETER: .375 TO .812 [9.53 TO 20.63]
- UL FILE NO.:E70531
- INSTALLATION INSTRUCTIONS, BUTTON ID, AND LABELS ARE PACKED WITH PART
- ALL BUTTONS ARE HIGH AMBIENT, CHEMICALLY RESISTANT MATERIAL

RELEASE SALES DRAWING		EC NO: IPG2016-0371		2015/09/04		DRWN: KCOX01		2015/09/04		CHK'D: HKNEELAN		2015/09/04		APPR: JFMURPHY		2015/09/29	
DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE INCH/MM				SCALE NTS		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
		<div>▽=0</div> <div>▽C=0</div>		mm		INCH		DRAWN BY DATE				TITLE <div>4 POSITION</div> <div>WATERTITE</div> <div>PLASTIC PENDANT STATION</div>					
				4 PLACES ±---		----		KCOX01 2015/09/04									
				3 PLACES ±---		±.005		CHECKED BY DATE									
2 PLACES ±.13				±.010		HKNEELAN 2015/09/04											
1 PLACE ±.25		±.020		APPROVED BY DATE				MOLEX MOLEX INCORPORATED									
JFMURPHY 2015/09/29		JFMURPHY 2015/09/29															
REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1/2°				MATERIAL NO.				DOCUMENT NO.				SHEET NO.	
				SEE TABLE				SD-130126-070				1 OF 1					
				SIZE A				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									