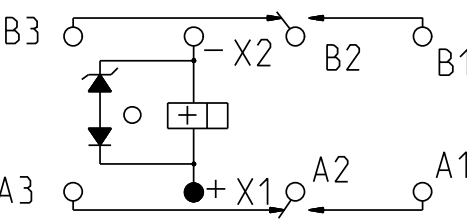


CUST. _____ CATALOG ITEM _____	TE NUMBER
CUST. NO. _____ REV. _____	6-1617758-6

CUSTOMER DATA SHEET	
 The diagram shows a rectangular component with four terminals: B3 (top left), B2 (top right), A3 (bottom left), and A2 (bottom right). A switch is connected between B2 and A2. Inside the component, there is a diode bridge with two diodes pointing towards the center. A terminal labeled X2 is connected to the top of the bridge, and a terminal labeled X1 is connected to the bottom of the bridge. A polarity symbol (+) is shown near X1.	
TERMINAL VIEW	
CONTACT RATING: <u>LOW LEVEL</u> <u>TO 5 AMPS 28 VDC. 115 VAC 400 Hz RESISTIVE.</u> <u>100,000 OPERATIONS</u>	
DR. B.D. 11MAR2008	CK. J.M.B. 3/17/08
 ©COPYRIGHT 2005 TYCO ELECTRONICS CORPORATION ALL INTERNATIONAL RIGHTS RESERVED	
CII PART NUMBER FCB-205-AT4	