


FCI CONFIDENTIAL



FCIconnect.com


Copyright FCI

PRODUCT NUMBER  
NOTE 3  
10080594-3AD0117LF

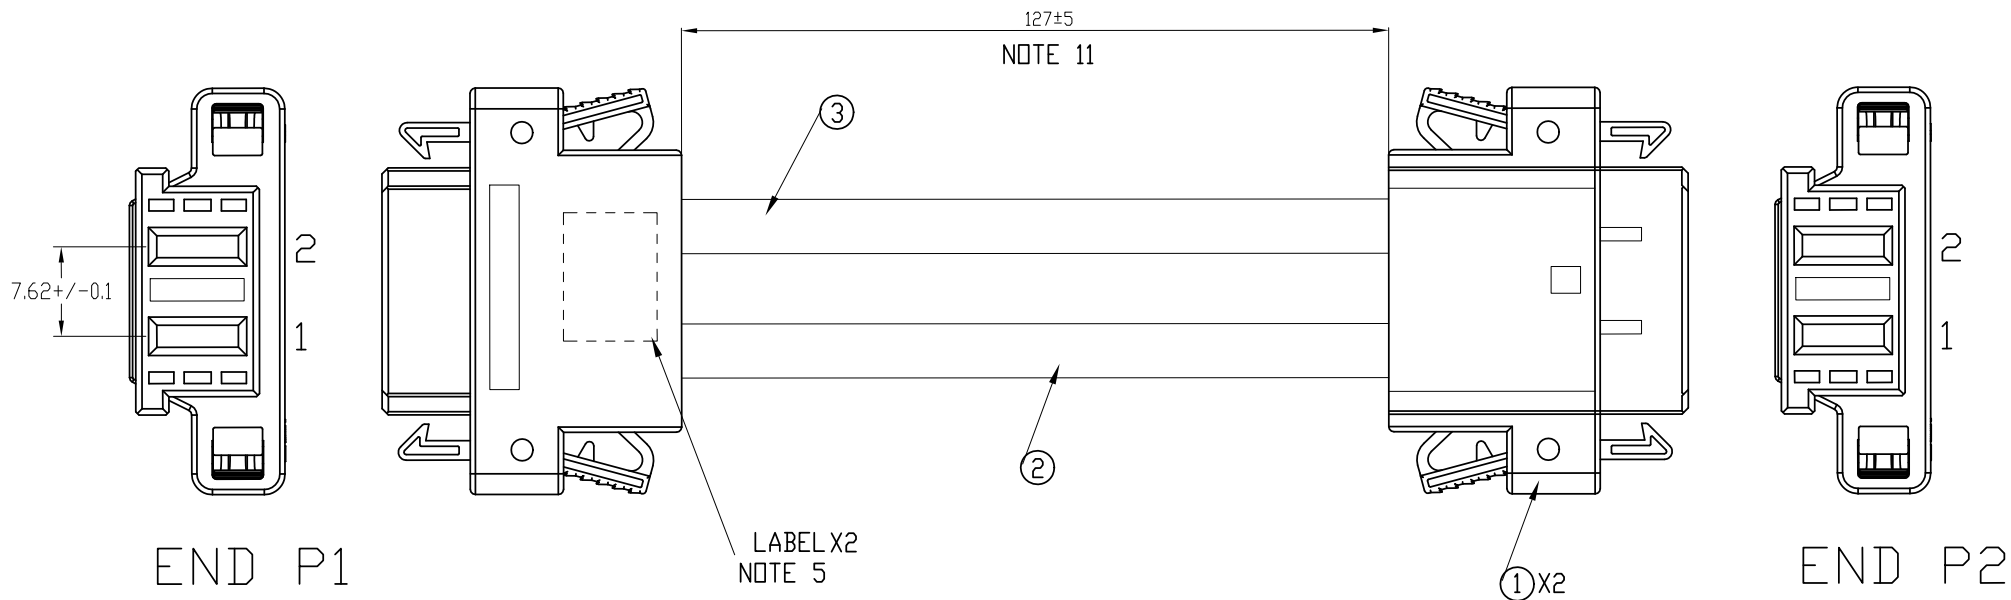

END P1	WIRE	END P2
1	8AWG BLACK	1
2	8AWG RED	2

Qty	Unit	Description	Item
NA	M	UL10198 ULTRA FLEXIBLE 8AWG RED	3
NA	M	UL10198 ULTRA FLEXIBLE 8AWG BLACK	2
2	PC	Housing 2Acp KIT 0.30" spacing	1


mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family Power blade		
ltr		ecn no		dr	date	tolerances unless otherwise specified					title	
c		-		wilson	01-12-12	angles		linear		PowerBlade 2Acp Cable Assembly		

## NOTES:

①. END P1 MATES WITH FCI HEADER P/N 51939-475LF or 51963-046LF.  
END P2 MATES WITH FCI HEADER P/N 51939-475LF or 51963-046LF.

②. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE =  
< = 1 METER:  $\pm 15.0\text{mm}$   
> 1 METER TO 10 METER:  $\pm 2\%$  OF L1  
> 10 METER:  $+0.00\%$  /  $-4\%$  OF L1

## 3. PART NUMBER DESCRIPTION:

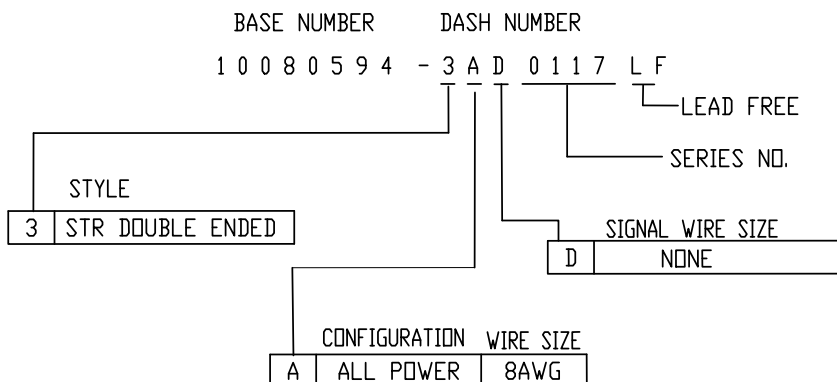

4. UNLESS OTHERWISE SPECIFIED LABEL POSITION SHALL BE APPROXIMATELY 50mm FROM REAR OF CONNECTOR.

⑤. LABEL OR INK STAMP 660-0218 ASSEMBLY NUMBER, REVISION, MFG. DATE CODE, AND SUPPLIER I.D. WITH .10" HIGH CHARACTERS APPROXIMATELY WHERE INDICATED. MARK TO 660 LEVEL PER PURCHASE ORDER OR CURRENT BILL OF MATERIAL.

RPM1191529/1 R1D  
WWYY FCI

⑥. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.

7. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING 300V DC FOR MINIMUM OF 10ms, UNLESS ACTIVE COMPONENTS ARE USED IN THIS ASSEMBLY.

8. ALL CUSTOMER DRAWINGS ARE SUPPLIED WITH METRIC DIMENSIONS.

⑨. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING SPECIFICATION GS-14-920.

⑩. CONNECTOR ASSEMBLIES SHOWN ARE FOR REFERENCE ONLY AND MAY NOT SHOW ALL PART DETAIL. REFERENCE CONNECTOR HOUSING DRAWINGS FOR COMPLETE DETAILS.

11. BAG AND TAG WITH THE PART NUMBER AND THE LATEST REVISION.

⑫. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.

13. CABLE: UL APPROVED, TEMPERATURE RATING 105°C. 300V .  
HOUSING: HIGH TEMP. THERMOPLASTIC, UL94V-0 GLASS FILLED,  
COLOR: BLACK  
POWER CONTACTS: COPPER ALLOY

mat'l. code			surface		tolerance		projection	product family			
			ISO 1302 ✓		ISO 406 ISO 1101			Power blade			
ltn		ec	no	dr	date	tolerances unless otherwise specified		title			
C						angles		MM	PowerBlade 2Acp Cable Assembly		
						linear					
								scale 4			
					dr	wilson	10-06'09		dwg no		
					engr	wilson	10-06'09			sheet 2 of 2	
					chr	wilson	10-06'09				10080594-3AD0117LF
					appd	Jackson	10-06'09				
sheet		revision		C					Type		
index		sheet		2						Customer	
									Drawing		