


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISE PER ECR-17-017464	30NOV2017	GSK	KN


Tooling Drawing NO.  
 USB A: TR00662

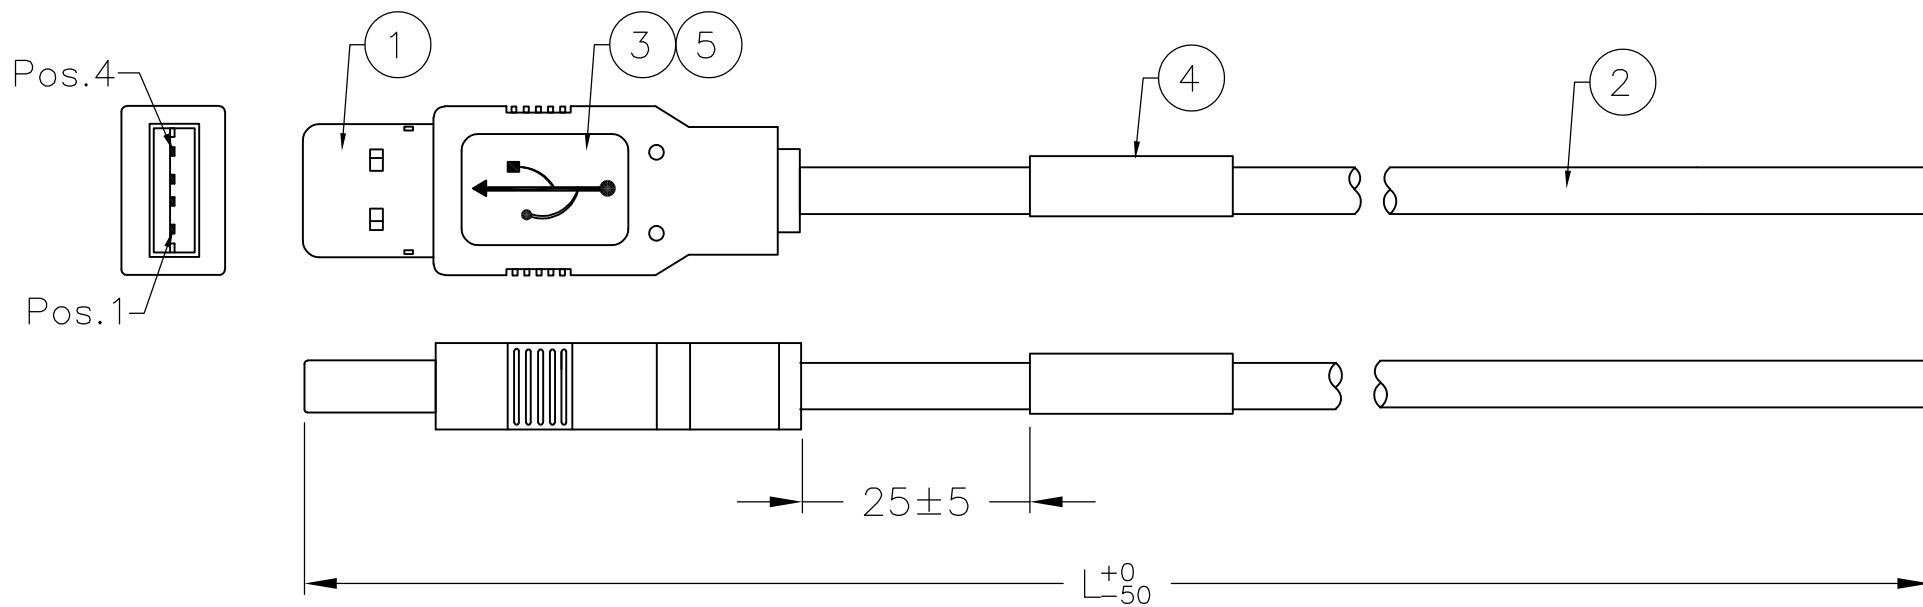

TE P/N  
 T/D YYWW  
 COO

LABEL

PIN ASSIGNMENT :

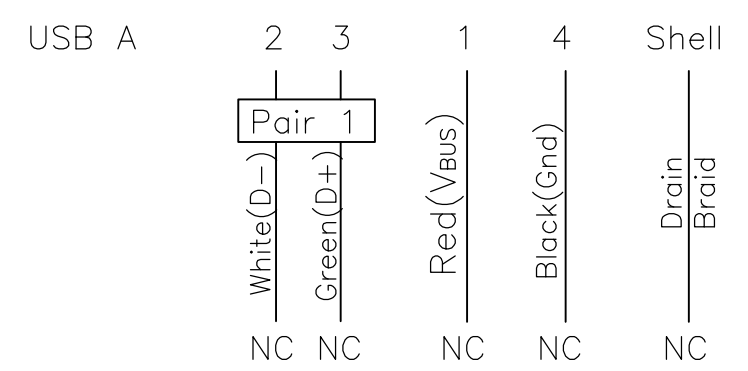

1487601-2	1500
1487601-1	2000
TE P/N	LENGTH(L)

AR	AR	MR	COPPER FOIL, W: 5MM	5
1	1	PC	SBP LABEL, WHITE, 25.4 X 36.5mm	4
AR	AR	KG	Overmold PVC, 40P, Color: Black(BK01)	3
AR	AR	MR	USB 2.0 Cable 28AWG*1P+24AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	2
1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-2	-1	U/M	DESCRIPTION	ITEM

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 2700MM PER USB SPECIFICATIONS.
  - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN BOVEY LIU 25/FEB/02  
 CHK K. NGUYEN  
 APVD F.D. McCORKEL 15/MAR/02

NAME: CABLE ASSEMBLY, USB A TYPE TO NC

STE TE Connectivity

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-1487601 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: N.T.S. SHEET: 1 OF 1 REV: H

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
MATERIAL	FINISH
-	-